

Orbit

Electric Towing Tractor

ORBIT MARS

1.5 TON TOW CAPACITY

REGENERATIVE BRAKING


SAFETY ACCESSORIES




Partner for Smart and Efficient Intralogistics

Technical Specification

Operator position	Standing
Frame	Mild steel, powder coated
Optional	Stainless steel
Drive	24 V DC, 600 W
Net weight	190 kg (excluding power-pack)
Towing capacity	1500 kg
Maximum speed	6 km/h, variable
Drive wheel	Solid rubber Ø 250 mm x 85 mm
Maximum slope	10% (1500 kg), 30% (350 kg)
Control	Adjustable tiller head
Turning radius	1200 mm
Ground clearance	118 mm (from the center of wheel base)
Brake	Electromagnetic brake
Charger	Portable
Safety	Horn, buzzer, headlamp, rearview mirror, turn signal, strobe light

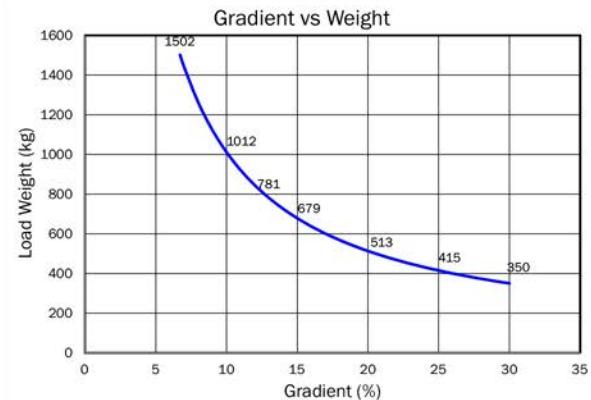

Dimensions

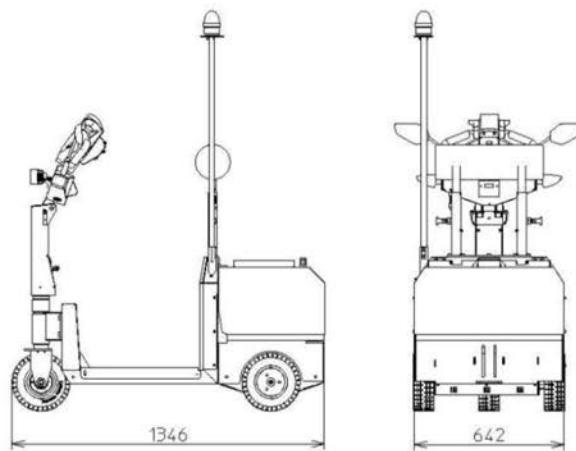

The data in this brochure is determined based on our standard testing condition. The performance may vary depending on the actual specification and condition of the vehicle as well as the condition of the operating area.

Contact Us

Office 031 - 8437363
Fax 031 - 8437365(62)

Manufactured by :

PT Senzo Feinmetal
Cikarang - Bekasi, Indonesia 17550

Orbit

Electric Towing Tractor

ORBIT JUPITER

3.5 TON TOW CAPACITY

REGENERATIVE BRAKING

SAFETY ACCESSORIES



DLN

PT. DEMPO LASER METALINDO
SHEET METAL AND TUBE FABRICATION COMPANY

 @dempolaser

 dempolasermetalindo

 dempolaser.mkt@dlm.co.id


 www.dempolaser.co.id

Reliable solutions for intralogistics activities
using state-of-the-art technology on electric vehicle

Partner for Smart and Efficient Intralogistics


Technical Specification

Operator position	Scooter
Frame	Mild steel, powder coated
Optional	Stainless steel
Drive	36 V Brushless DC, 1500 W
Net weight	280 kg (excluding power-pack)
Towing capacity	3500 kg
Maximum speed	9 km/h, variable
Drive wheel	Solid rubber Ø 306 mm x 105 mm
Maximum slope	10% (3500 kg), 30% (375 kg)
Control	Adjustable tiller head
Turning radius	1200 mm
Ground clearance	118 mm (from the center of wheel base)
Brake	Electro static brake
Charger	Portable
Safety	Operator presence switch, horn, turn signals, rearview mirrors, buzzer, strobe light

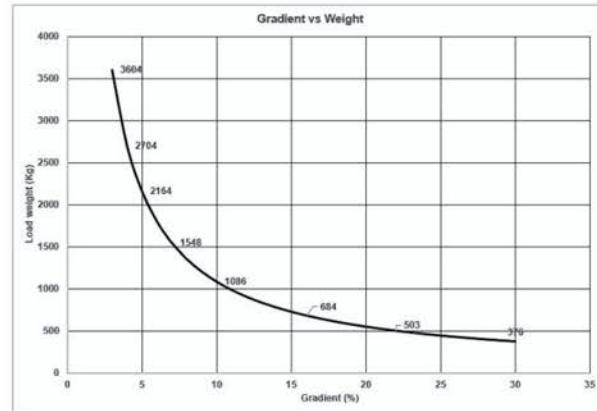

Dimensions

Orbit
Jupiter

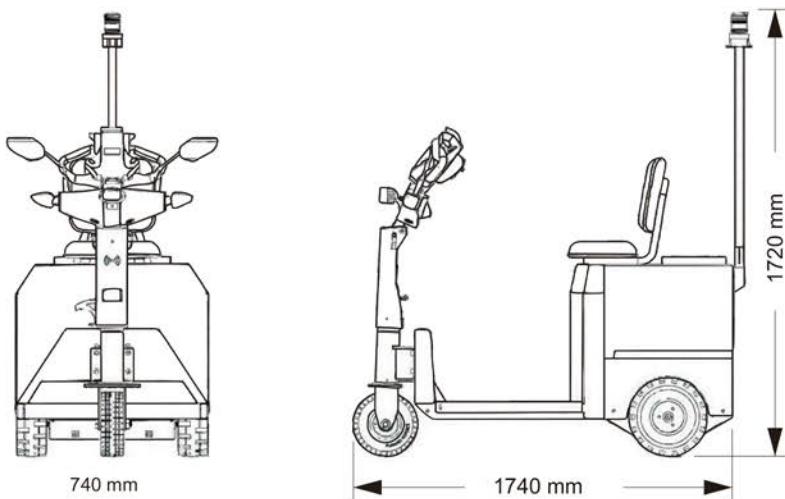

The data in this brochure is determined based on our standard testing condition. The performance may vary depending on the actual specification and condition of the vehicle as well as the condition of the operating area.

Contact Us

Office 031 - 8437363
Fax 031 - 8437365(62)

Manufactured by :

PT Senzo Feinmetal
Cikarang - Bekasi, Indonesia 17550

Orbit

Electric Towing Tractor

ORBIT PLUTO



1.5 TON TOW CAPACITY

REGENERATIVE BRAKING

SAFETY BELLY BUTTON

PT. DEMPO LASER METALINDO

SHEET METAL AND TUBE FABRICATION COMPANY

 @dempolaser

 dempolasermetalindo

 dempolaser.mkt@dlm.co.id


 www.dempolaser.co.id

Pedestrian type mover
for various pull and push application

Partner for Smart and Efficient Intralogistics


Technical Specification

Operator position	Pedestrian
Frame	Mild steel, powder coated
Optional	Stainless steel
Drive	24 V DC, 600 W
Net weight	170 kg (excluding power-pack)
Towing capacity	1500 kg
Maximum speed	6 km/h, variable
Drive wheel	Solid rubber Ø 250 mm x 85 mm
Maximum slope	10% (1500 kg), 30% (350 kg)
Control	Adjustable tiller head
Turning radius	1200 mm
Ground clearance	118 mm (from the center of wheel base)
Brake	Electromagnetic brake
Charger	Portable
Safety	Belly button, horn

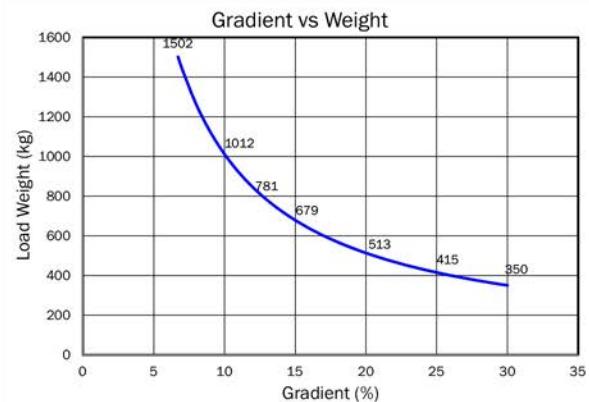

Dimensions

Orbit
Pluto

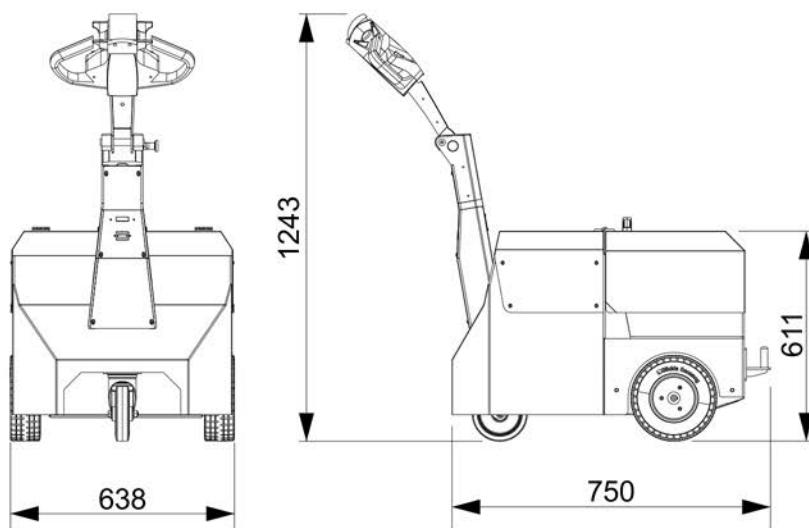

The data in this brochure is determined based on our standard testing condition. The performance may vary depending on the actual specification and condition of the vehicle as well as the condition of the operating area.

Contact Us

Office 031 - 8437363
Fax 031 - 8437365(62)

Manufactured by :

PT Senzo Feinmetal
Cikarang - Bekasi, Indonesia 17550