


# FABRIC EXPANSION JOINT

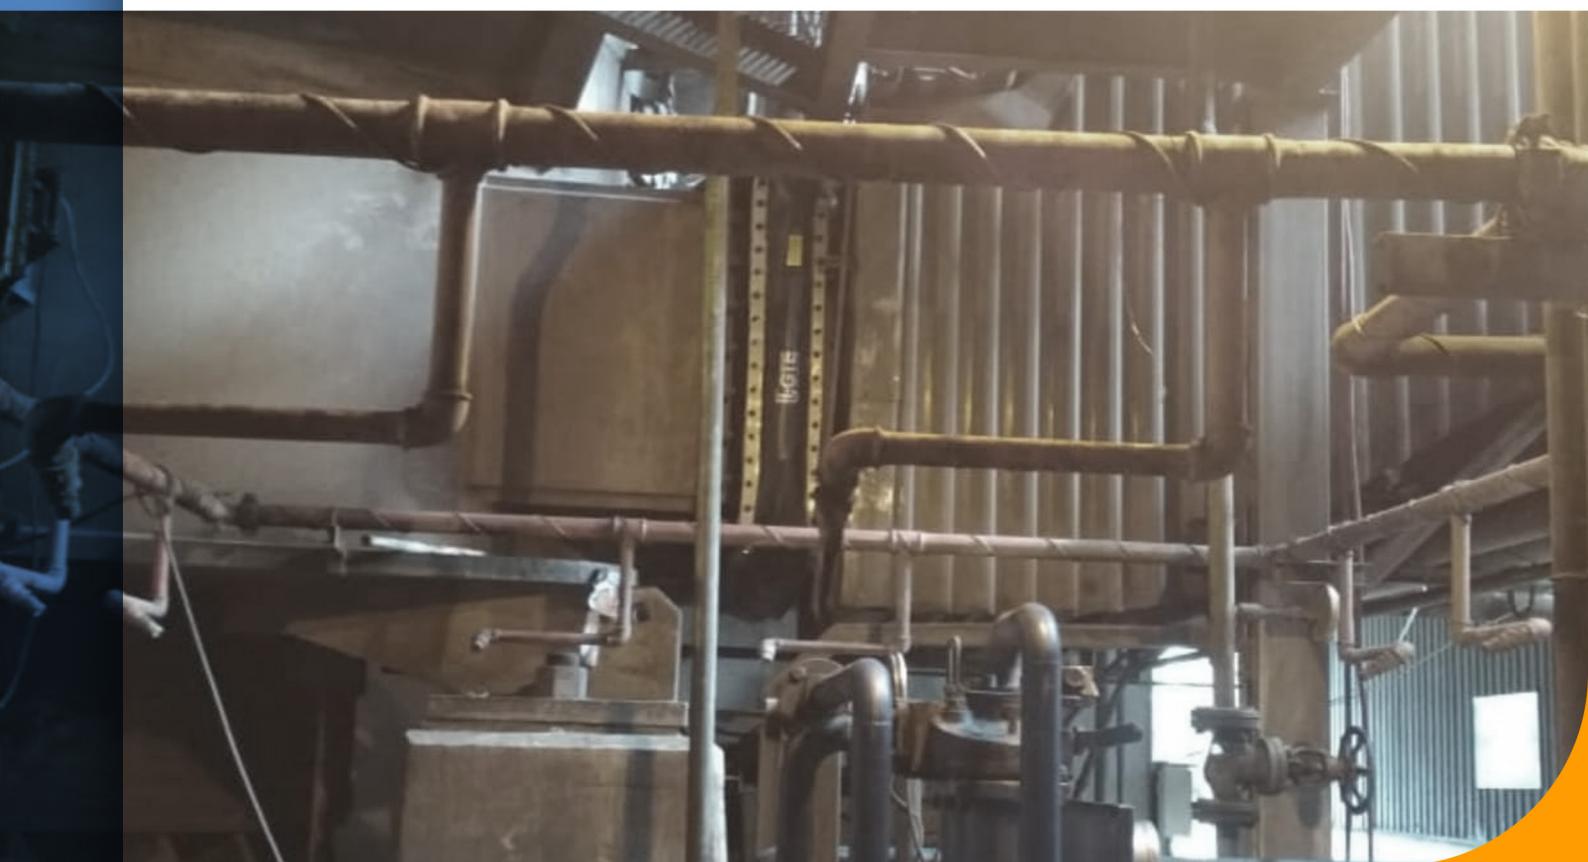

**T-GTE**  
SEALING & INSULATION MANUFACTURER

PRODUCT  
CATALOG

## WHAT IS A FABRIC EXPANSION JOINT?

Fabric expansion joints are extremely flexible and can be made from a variety of special woven fabrics coated or laminated with selected elastomers or fluoropolymers.

Fabric expansion joints are used to insulate, to avoid mechanical loads and to protect against abrasion. They offer advantages for the pipe work designer as they absorb movements simultaneously in several directions, they have almost no reactive forces and require little space.

Fabric expansion joints are easy to customize to suit existing operating conditions and are easy to transport and install. In comparison to metallic expansion joints, fabric expansion joints offer almost unlimited flexibility and give numerous options for the pipe work designer.

Fabric expansion joints are installed in systems operating with low pressure and dry media



## HOW DOES A FABRIC EXPANSION JOINT WORK?


A fabric expansion joint is inserted into a gap in the ductwork where the movement will occur.

A fabric expansion joint has two main components :The fabric gas seal and The metal frames.

The fabric gas seal is a closed loop, like a belt, with its two edges clamped all around to the metal frames that are in turn connected to the end of the duct. As the ducting moves, the fabric belt deforms.

The fabric material must do this without tearing or leaking while sometimes being exposed to high temperatures and/or corrosive media.

In some instances, additional components such as insulation pillows, accumulation barriers or flow liners are utilized to help protect the fabric material.

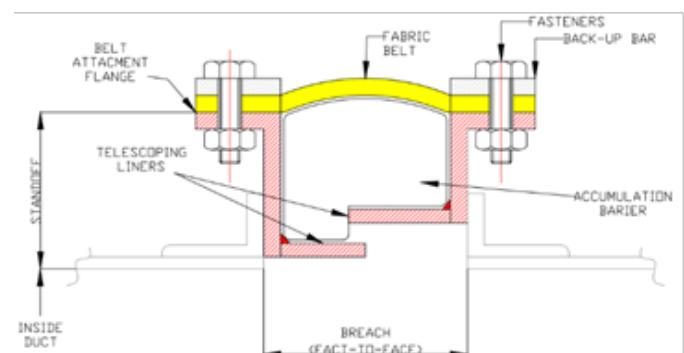

## APPLICATIONS

Fabric expansion joints are found in a wide range of industries including:

- o Chemical process plants
- o Cement manufacturing
- o Pulp and paper industry
- o Power stations
- o Refineries
- o Shipbuilding
- o Steel plants
- o Sugar plants
- o Gas turbine installations

# PRODUCT RANGE

Types	: Circular and rectangular
Dimension	: All sizes and with or without steel parts. For installation in existing duct- and/or pipework the fabric expansion joints are supplied with either closed- or open ended band.
Temperature	: Up to +1200°C
Pressure	: Up to 3.0 bar




## CONSTRUCTION

Selection of the optimum construction for fabric expansion joints depends on a number of factors which need to be considered for the application, generally speaking, there are no “standard” designs.


Fabric expansion joints are available in many Configurations with single-layer or multi-layer fabric elements. The multilayer expansion joint is generally made from:

1. Internal material; to avoid abrasion
2. Insulation material; to resist high temperature
3. Sealing foil; for gas-tight construction
4. Outer cover; against mechanical loads
5. Reinforcement; protection ensuring strong construction in the area where bolts are fixed.

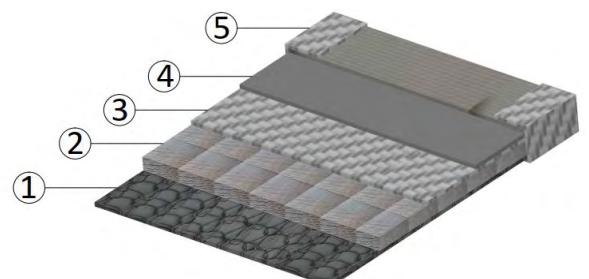


# MOVEMENTS

The movements that the units are capable of accepting can be singular or a combination of:




## Axial Compression

The reduction in the breach opening along the axis of the duct. This is usually a result of thermal expansion of the ducting




## Axial Extension

The increase in the breach opening along the axis of the duct. In certain configurations, the duct thermal expansion may result in extension of the expansion joint location




## Lateral Movement

The relative movement of the upstream and downstream faces in the direction perpendicular to the axis of the duct



## Torsional Rotation

The twisting of one side of the duct about the longitudinal axis



## Angular Rotation

The twisting of one side of the duct about an axis perpendicular of the longitudinal axis


# DESIGN STYLES

Fabric expansion joints are usually supplied as a “belt” or with integral flanges, the preferred arrangement will depend on the conditions of the installation and system temperature. Simple flanged solutions are common for installing against flanges mounted onto the ductwork, an arrangement suitable for low-temperature areas.

Belt type expansion joint attached directly onto the outside of the duct using clamping bands normally used for:

1. Low temperatures (up to 300°C)
2. Low to medium velocity
3. Low to medium dust load


i.e.: Clean air ducts

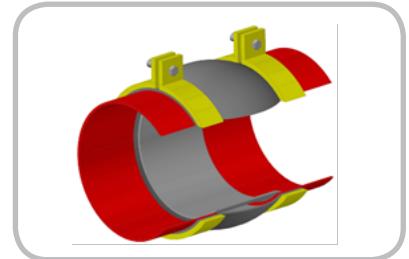

Convoluted fabric expansion joints are attached directly onto the outside of the duct using clamping bands normally used for:

1. Large movements
2. Low velocity
3. Low dust content
4. Low temperature

i.e.: Pulp and paper industry

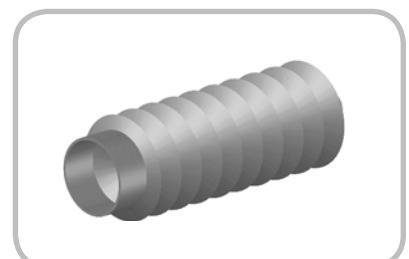


Fabric expansion joints mounted on vertical flanges, typically used in systems with:

1. Low flow velocity
2. Low dust content
3. Low temperature (up to 450°C)

The design can be made both with and without sleeve. The sleeve primarily acts to protect the fabric expansion joint from the particles in the flow medium


i.e.: Chemical industry (wet and dry)

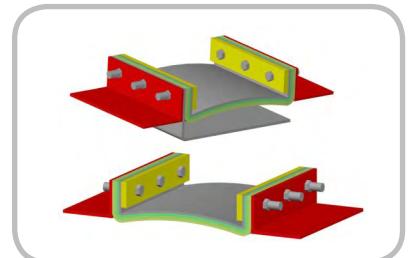

Fabric expansion joints mounted on parallel flanges, typically used in ductwork with:

1. Medium temperature range (up to 500°C)
2. Higher flow velocities
3. Medium dust content in the flow


i.e.: Low temperature flue gas ductwork in conventional power stations

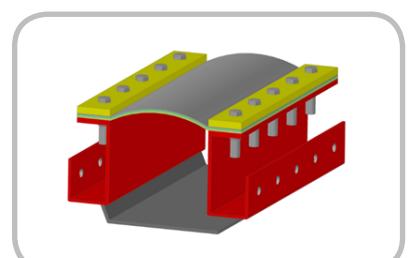

Fabric expansion joints mounted on parallel flanges with insulation bolster, typically used in plants with:

1. High temperatures (up to 600°C)
2. High dust content
3. High flow

i.e.: High temperature flue gas duct systems in conventional power stations

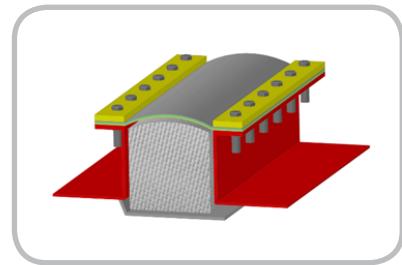


Fabric expansion joints with floating sleeve, construction are typically used in plants with:

1. Medium to high temperatures (up to 600°C)
2. Very high dust content
3. Low to high flow velocities

The floating sleeve gives good protection against dust whilst allowing lateral movement.

i.e: Cement industry

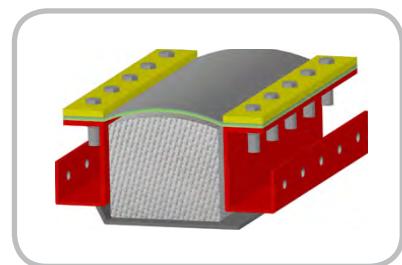

## SPECIAL DESIGNS

In this brochure we have tried to provide a general idea of our capacity to design and supply fabric expansion joints for commonly-found applications. In addition to the styles shown here we can assist with very special applications such as “picture-frame” units, units with pantographic linkage, pipe penetration seals and other special arrangements including “dog-bone” seals for low-pressure ductwork carrying condensates and fluids. Further details are available on request.

# ONSITE SERVICES FOR FABRIC EXPANSION JOINTS

Our competence in the provision of fabric expansion joint solutions extends also to onsite services. We provide support from the initial design, construction and installation stages and continuously thereafter throughout the service life of the equipment. We have a team of skilled installers with experience in a wide range of site conditions who work in compliance with the prevailing safety regulations.

Our services for fabric expansion joints include:




- o Installation
- o Replacement (dismantling and installation)
- o Repair
- o Supervision of installation
- o Assisting plant personnel in the installation/ replacement work
- o Inspection, i.e. estimation of remaining service life (incl. report of status, evaluation and recommendations)

For such onsite work we have equipment ready and packed to ensure quick support if needed.



## FACTORY ASSEMBLED








Where conditions allow, fabric expansion joints can be shipped factory assembled ready to install. The Complete joint can be lifted in place with crane and attached, either by welding or bolting, to ducting or equipment

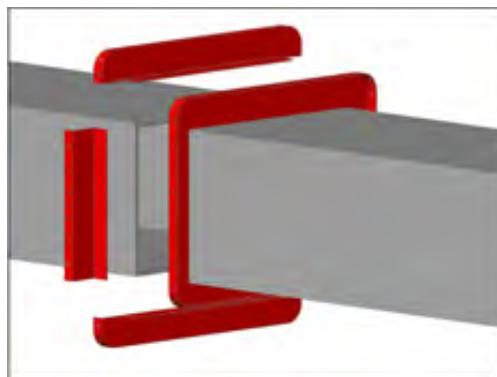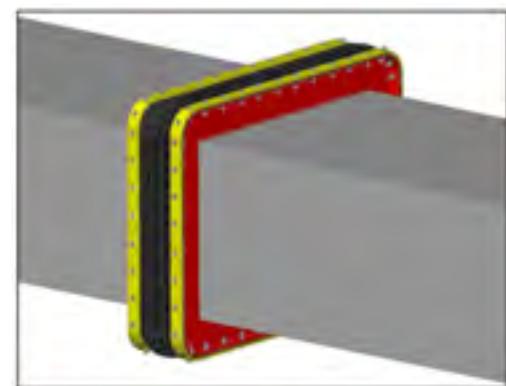


## UNASSEMBLED

In some instances, it may be preferable to purchase the expansion joint unasssembled and complete the assembly of the joint in place on the ducting. In this case, the frame will typically ship as rails attached to corners for rectangular joints and in c-sections for round joints. The fluoroplastic fabric belt is easy to field drill and splice in place

### Fabric Expansion Joint Data Sheet

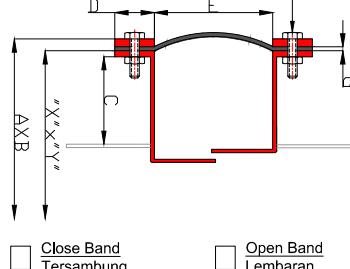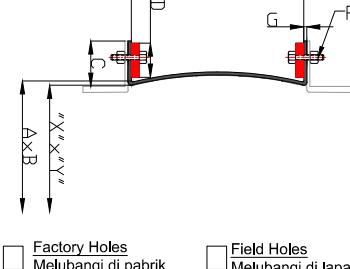Customer : Pelanggan		Address : Alamat		Contact : Kontak											
Phone : Telephone	Fax number : Nomor Fax	Email : E-mail	Date : Tanggal												
Industry : Perusahaan	Location : Lokasi	Area : Tempat	Item/Tag : Barang / menandai	Quantity : Jumlah											
<input type="checkbox"/> New Expansion Joint (Complete set) Expansion Joint Baru (Set lengkap)		<input type="checkbox"/> Repair Expansion Joint Perbaikan Expansion Joint	<input type="checkbox"/> New Fabric Expansion Joint Kain Baru Expansion Joint												
Expansion joint Style / Options Pilihan Model Expansion Joint	 <input type="checkbox"/> BNS01B		 <input type="checkbox"/> BNS02B		 <input type="checkbox"/> BNS03B										
	 <input type="checkbox"/> BNS04B		 <input type="checkbox"/> BNS05B												
							Options: Pilihan								
	 <input type="checkbox"/> BNS01W		 <input type="checkbox"/> BNS02W		 <input type="checkbox"/> BNS03W										
							Other: lainnya								
	 <input type="checkbox"/> BDS01B		 <input type="checkbox"/> BDS01W		 <input type="checkbox"/> FNS01B										
							Fabric Only								
"A,B" Size expansion joint (Ø OD / P X L) Luas ukuran permukaan luar Expansion Joint				 <input type="checkbox"/> Close Band Tersambung		 <input type="checkbox"/> Open Band Lembaran									
"X,Y" Size expansion joint (Ø ID / P X L) Luas ukuran dalam Expansion Joint															
"C" Size ducting / pillow Ukuran ducting (Untuk mengetahui Pillow )															
"D" Width And Thiknes Back up Flange Expansion joint Lebar dan tebal Back up flange															
"E" Length Expansion joint Lebar Expansion Joint															
"F" Bolt & Nut Baut dan mur															
"G" Thicknes Cuff Expansion joint Tebal Cuff Expansion joint															
Corner Radius (Rect. Only) Jari - Jari Expansion Joint (Hanya untuk Persegi)															
Frame Assy		<input type="checkbox"/> Fully Assembled Perakitan dan pemasangan				<input type="checkbox"/> Unassembled , Field Welds ,Fabric Splice and Drill Belum dirakit , pengelasan,pengeboran di lapangan									
		<input type="checkbox"/> Expansion Joint Fabric only with welding and splices in the field Kain Expansion Joint saja dan pengelasan di lapangan				<input type="checkbox"/> Fabric Expansion Joint Only Kain Expansion joint									
Application Aplikasi	Operating Operasi		Design Desain	Excursion Excusi	Duration (min) Durasi (min)										
	Temperature (°C) Suhu (°C)														
	Pressure (BAR) Tekanan (BAR)														
			Compration Kompresi	Extension Extensi	Lateral Lateral	Other Lainnya									
	Movements Pergerakan														
Media :		<input type="checkbox"/> Air (clean) Udara (bersih) <input type="checkbox"/> Flue Gas Gas Buang <input type="checkbox"/> Dirty Flue Gas Gas Buang Kotor <input type="checkbox"/> Wet Flue Gas Gas Buang Basah				Other Lainnya									
		Flow Direction Arah Aliran							Flow Velocity (Ft.Sec) Kecepatan Aliran(Ft. Sec)						
Note Actual Lapangan :															
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Teknisi Lapangan</td> <td>User</td> <td>Marketing</td> <td>Date</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </table>								Teknisi Lapangan	User	Marketing	Date				
Teknisi Lapangan	User	Marketing	Date												



AUTHORIZED DISTRIBUTOR GTE PRODUCTS  
**PT. AQPA INDONESIA**

## AUTHORIZED DISTRIBUTOR :

### **PT AQPA INDONESIA**

Ruko Puri Kencana Blok II No 4  
JI Raya Mustikasari, Pengasinan,  
Rawa Lumbu, Bekasi – Jawa Barat 17115

Phone : 021-8241 5897  
Fax : 021-8241 5898  
Email : [info@aqpa-indonesia.com](mailto:info@aqpa-indonesia.com)  
Web : [www.aqpa-indonesia.com](http://www.aqpa-indonesia.com)

*Incase of Emergency, please call :*

**+62 812 8164 4425**

