

MASKOT

ACID KABINET



MODEL	ACID CABINET
Material	Polypropylene dari SIMONA Germany
Volume	400 Liter (105 gal)
Voltage	220 VAC/ 50 Hz
Power Listrik	50 W
Dimension Dalam (P x L x T)	98 x 40 x 100 cm
Dimensi Luar (P x L x T)	100 x 50 x 120 cm
Dimensi Setelah Di Packing Kayu	110 x 60 x 130 cm
Dilengkapi : Acid Alarm Warning & Acid Absorber	
Harga	72.000.000

Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu

FUME HOOD/ LEMARI ASAM

FUME HOOD



MODEL	EDU	EDU PLUS
Dimensi (PxLxT) mm	1000 x 610 x 2000	1000 x 610 x 2000
Ruang Kerja (PxLxT) mm	970 x 500 x 520	970 x 500 x 520
Material	Multiplex 15 mm	Multiplex 15 mm
Dinding Dalam	PVC Sheet Laminated	PVC Sheet Laminated
Dinding Luar	High Pressure Laminates	High Pressure Laminates
Alas Kerja	Phenolic Resin (Acid Resistant)	Phenolic Resin (Acid Resistant)
Pintu Dinding Kanan-Kiri	Transparant Acrylic	Transparant Acrylic
Elektrikal	2 buah Saklar 1 buah Stop Kontak TL Lamp 1 x 10 w -	2 buah Saklar 2 buah Stop Kontak TL Lamp 1 x 10 w 1 buah Pilot Lamp
Daya	120 W	770 W
Voltase	220 VAC / 50 Hz	220 VAC / 50 Hz
Mesin	Plastic Blower	Single Phase Blower 3 Phase Blower
Harga	35.200.000	45.400.000

MODEL	PRIME
Dimensi (PxLxT) mm	1200 x 750 x 2200
Ruang Kerja (PxLxT) mm	1165 x 550 x 650
Material	Multiplex 18 mm
Dinding Dalam	PVC Sheet Laminated
Dinding Luar	High Pressure Laminates
Alas Kerja	Phenolic Resin (Acid Resistant)
Pintu Dinding Kanan-Kiri	Transparent Acrylic
Elektrikal	2 buah Saklar 1 buah Pilot Lamp 2 buah Stop Kontak TL Lamp 2 x 12 W
Daya	800 W
Voltase	220 VAC / 50 Hz 380 VAC / 50 Hz
Mesin	Single Phase Blower 3 Phase Blower
Optional	Water Sink Kran Gas Netralisir Chamber
Harga	61.200.000

DUCTLESS FUME HOOD



MODEL	DFH 800 S
Dimensi (PxLxT)	800 X 650 X 1500 mm
Ruang Kerja (PxLxT)	760 X 500 X 450 mm
Material	Poly Propylene
Alas Kerja	Phenolic Resin (Acid Resistant)
Pintu	Transparent Acrylic
Elektrikal	2 buah Saklar 1 buah Pilot Lamp TL Lamp 1 x 10 W Alarm Warning
Voltase	220 VAC/50 Hz
Daya	60 W
Mesin	Single Phase Blower
*Optional	*SS Stand
Harga	95.000.000

Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu

LAMINAR AIR FLOW (LAF)

LAMINAR AIR FLOW



MODEL	V 620 S	V 930 S
Dimensi	V = 650 X 750 X 1100 mm	V = 960 X 730 X 1220 mm
Ruang Kerja	620 x 520 x 480 mm	930 x 500 x 560 mm
Alas Kerja	Stainless Steel 304	
Material	Laminated Multiplex 15 mm	
Pintu	Transparent Anti UV	
Pengoperasian Pintu	Sliding Atas Bawah	
Kebisingan	50 Db	
Kecepatan Aliran Udara	0.3 m/s – 0.7 m/s dapat diatur (adjustable)	
Hepa Filter	0.3 µm 99.99%	
Daya	150 W	200 W
Voltase	220 Vac / 50 Hz	
Advantage	Speed Velocity Monitor	
Aksesoris	Lampu TL Putih 10 W	Lampu Putih 18 W
	Lampu UV 10 W	Lampu UV 20 W
	Saklar Lampu	Saklar Lampu
	Dimmer	Dimmer
*Optional	Stainless Steel Support Stand	
Harga	33.200.000	35.520.000

Mini LAMINAR AIR FLOW

MODEL	Mini LAF V-60
Airflow Velocity	0.2-0.6m/s
Noise	≤60db
Max. Opening	310mm
Power	110 W
N.W (KG)	35
G.W (KG)	53
HEPA Filter	99.999% efficiency 0.3um
Voltage	220-240 V/ 50-60Hz
Inner Dimension (mm)	480 X 340 X 370
Exterior Dimension (mm)	550 X 460 X 700
Harga	21.600.000



Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu

HEATING MANTLE

ANALOG HEATING MANTLE



MODEL	AHM 250	AHM 500	AHM 1000	AHM 2000	AHM 3000	AHM 5000
Capacity	250ml	500ml	1000ml	2000ml	3000ml	5000ml
Max. Temp	450°C					
Power	150W	250W	350W	450W	600W	800W
Harga	1.350.000	1.420.000	1.800.000	2.100.000	2.800.000	3.800.000

ANALOG HEATING MANTLE + STIRRER

MODEL	AHM 250 S	AHM 500 S	AHM 1000 S
Capacity	250ml	500ml	1.000ml
Max. Temp	450°C		
Speed	0 – 1.500rpm		
Voltage	220VAC/50Hz		
Power	150W	250W	350W
Harga	2.320.000	2.450.000	3.000.000



DIGITAL HEATING MANTLE

MODEL	DHM 250	DHM 500	DHM 1000
Capacity	250ml	500ml	1000ml
Max. Temp	450°C		
Voltage	220VAC/50Hz		
Power	150W	250W	350W
Harga	2.650.000	2.800.000	3.000.000

DIGITAL HEATING MANTLE + STIRRER

MODEL	DHM 250 S	DHM 500 S	DHM 1000 S
Capacity	250ml	500ml	1000ml
Max. Temp	450°C		
Speed	0 - 1600rpm		
Voltage	220VAC/50Hz		
Power	150W	250W	350W
Harga	3.610.000	3.750.000	4.000.000



SEVERAL ROWS ANALOG HEATING MANTLE

MODEL	SAHM - 250 - 6
Capacity	6 X 250 ml
Max Temp.	450°C
Timer	0 – 9999 min
Voltage	220 VAC / 50 HZ
Power	6 X 150 w
Harga	8.150.000

Untuk produk yang tidak ada dalam katalog harap menghubungi kami, harga dapat berubah sewaktu-waktu


ANALOG HOTPLATE STIRRER



MODEL	AHS 2	AHS 3
Max. Temp.	350°C	350°C
Speed	100-2.000 rpm	100-2.000 rpm
Plate	Almn 120x120 mm	Almn 170x170 mm
Max. Volume	2.000 mL	3.000 mL
Voltage	220V / 50Hz	220V / 50Hz
Power	200W	500W
Harga	2.500.000	4.420.000

DIGITAL HOTPLATE CERAMIC MAGNETIC STIRRER

MODEL	DSH 19-C
Exterior Dimension (WxLxH)mm	320 x 190 x 125
Plate Size (WxLxH)mm	190 x 190
Mode	Digital+ Heating + Stirring
Max Volume	5L
Speed	200-2000 rpm
Max Temp	350°C
Timer	Yes
Sensor	PT 100
Plate Load	10 KG
Harga	9.100.000

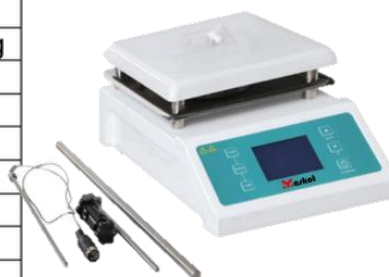

COLONY COUNTER/ COLONOMETER



MODEL	DCC 115	DCC 155
Counting	0 - 999	0 - 999
Diameter	ø115 mm	ø155 mm
Suitable Petri Dishes	ø50 - 100 mm	ø50 - 150 mm
Standard Configuration	Magnifying Glass Counting Pen	
Power	20 W	40 W
Voltage	220 VAC / 50 Hz	
Dimension (WxLxH)mm	255 x 210 x 160	360 x 300 x 180
Harga	4.300.000	6.700.000

MODEL	DM 0424
Dimensi (PxLxT) mm	364x440x268
Speed Range	500-4000rpm
Speed Accuracy	±100rpm
Include Rotor Swing	6x15 ml
Timer	1-99 min
Voltage	100V-240V, 50Hz/60Hz
Optional Swing	4x50 ml
Optional Angle	24x15 ml 12x10 ml
Harga	30.500.000

CLINICAL CENTRIFUGE



Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu



DIGITAL WATERBATH

MODEL	DWB 1H	DWB 2H	DWB 4H	DWB 6H
Dimension Bath (WxLxH)mm	150 x 135 x 150	300 x 150 x 150	325 x 300 x 150	500 x 300 x 150
Sample Holes	1	2	4	6
Capacity	3L	6L	10L	18L
Range Temp.	RT +5~100°C			
Accuracy	0.5°C			
Timer	0-9999 min			
Voltage	220V/50Hz			
Power	400W	500W	1.000W	1.500W
Water Level Sensor				
Harga	3.750.000	4.650.000	5.750.000	7.150.000



DIGITAL WATERBATH + COVER



MODEL	DWBC 2H	DWBC 6H
Dimension Bath (WxLxH)mm	420 x 180 x 140	600 x 300 x 200
Capacity	10L	30L
Range Temp.	RT+ 5~100°C	
Accuracy	0.5°C	
Sample Holes	2	6
Sample Test Tube Holes (ø15mm)	78	190
Voltage	1.000W	2.000W
Power	220V/50Hz	
Safety Device	Over Temperature Alarm	
Include	Stainless Steel Cover	
Harga	6.600.000	9.900.000

MODEL	DSWB-30
Mode	Reciprocating Oscillation + Thermostatic WaterBath
Operating Temp Range	RT- 100°C
Temp. Resolution Rasio	0.1°C
Temp. Motion	±0.1°C
Temp. Uniformity	±0.2°C
Amplitude	16 or 24 mm
Reciprocating Frequency Range	20-180 (r/min)
Speed Accuracy	±1 rpm
Timer	0-9999 min
Volume	31 L
Power	1500 W
Safety Device	Over Temperature Alarm, Menu Locked, Water Full Or Shortage Protection, Motor Shaft Lock Protection
Shack Basket Largest Single Size (ml/pieces)	100 ml x 12 250 ml x 8 500 ml x 6
Exterior Dimension (WxLxH) mm	828x360x425
Water Tank Size (WxLxH) mm	500x310x200
Harga	38.200.000



SHAKING WATERBATH

Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu

CLIMATIC CHAMBER with Illumination



MODEL	DEMH 250
Inner Chamber size(W*L*H)(mm)	600*500*840
Exterior size (W*L*H)(mm)	794*726*1600
Cycle Mode	Forced convection, Rear micropore. Supply air in front of the plate
Temp. Range	Without illumination:0~65°C; With illumination:10~65°C
Temp. Resolution Ratio	0.1°C
Temp.Motion	±0.5°C
Temp. Uniformity	±1.0°C
illumination(LX)	Full spectrum 0-30000LX many degrees for adjusting
Humidity Range	40%~95%RH
Humidity Motion	±5% RH
Inner Chamber	SUS 304
Power Rating	2000 W
Compressor	Air cooled hermetic compressor
Coolant	R134A
Defrosting & Humidity Structure	Automatic
Temp. control mode	30 sections program
Volume	250L
Load per rack	15kg
Shelf space	50mm
Rak	4
Harga	186.200.000

GROWING PLANT CHAMBER

MODEL	DEM 250
Exterior Dimension (WxLxH)mm	794 x 726 x 1600
Inner Chamber (WxLxH)mm	600 x 500 x 840
Cycle Mode	Forced convection, Rear micropore. Supply air in front of the plate
Illumination (LX)	Full spectrum 0-30000LX many degrees for adjusting
Temp. Resolution Rasio	0.1°C
Temp. Motion	±1°C
Temp. Uniformity	±1.0°C
Temp. Control Mode	30 sections program
Temp Range	Without Illumination 0-65 °C With illumination 10-65°C
Coolant	R134A
Defrosting Structure	Automatic
Load per Rack	15 KG
Shelf Space	120mm
Accessory	Shelf : 4 Shelf Plate : 8
Volume	250 L
Power	2000W
Safety Devices	Over temp.perature will automatically cut off the heating, long-term under temp.perature cut off the refrigeration systemp., protect the sample; loop self diagnosis
Harga	177.500.000

Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu

DIGITAL DRYING OVEN



MODEL	OV 30	OV 45	OV 65	OV 125
Exterior Dimension (WxLxH)mm	450 X 500 X 690	490 X 540 X 730	540 X 550 X 830	640 X 640 X 930
Chamber Dimension (WxLxH)mm	310 X 310 X 310	350 X 350 X 350	400 X 360 X 450	500 X 450 X 550
Temp. Range	RT + 10°C - 300°C			
Temp. Accuracy	±1°C			
Timer	0~9999 min			
Voltage	220V/50Hz			
Power	800 W	1200 W	1600 W	2300 W
Harga	16.300.000	18.000.000	20.000.000	30.800.000

MODEL	OV 230
Exterior Dimension (WxLxH)mm	735 X 835 X 1115
Chamber Dimension (WxLxH)mm	600 X 500 X 750
Temp. Range	RT + 10°C - 300°C
Temp. Accuracy	±1°C
Timer	0~9999 min
Voltage	220V/50Hz
Power	3000 W
Harga	44.500.000



HORIZONTAL DIGITAL DRYING OVEN



MODEL	OV 43	OV 136
Exterior Dimension (WxLxH) mm	660 x 530 x 580	852 x 572 x 786
Chamber Dimension (WxLxH) mm	350 x 350 x 350	550 x 450 x 550
Display	Digital	
Temp. Controller	PID	
Temp. Range	RT + 10°C - 250°C	
Temp. Accuracy	1°C	
Timer	0~9999 min	
Voltage	220V/50Hz	
Power	1.200 W	2300 W
Harga	16.500.000	28.800.000

MODEL	VOV 50
Inner Dimension (WxLxH) mm	415 x 345 x 370
Exterior Dimension (WxLxH) mm	560 x 540 x 680
Range Temperature	RT + 10 - 250°C
Number of Shelf	2
Fuse Spesification	15A
Nozzle Diameter	10 mm
Temperature Rise	± 1°C
Accuracy	0.2°C
Vacuum	< 133 pa
Shelf Space	140 mm
Heating-Up Time	100 min
Timer	0-9999 min
Voltage	220-240V/50Hz
Power	1.400W
Harga	35.200.000

VACUUM DRYING OVEN



Untuk produk yang tertera di dalam katalog ini, harga yang kami tawarkan dapat berubah sewaktu-waktu

DUAL FUNCTION INCUBATOR OVEN



MODEL	IN OV 30	IN OV 45	IN OV 65	IN OV 125
Exterior Dimension (WxLxH)mm	450 X 500 X 690	490 X 540 X 730	540 X 550 X 830	640 X 640 X 930
Chamber Dimension (WxLxH)mm	310 X 310 X 310	350 X 350 X 350	400 X 360 X 450	500 X 450 X 550
Temp. Range	RT+ 5°C - 300°C			
Temp. Accuracy	±0.2°C			
Timer	0~9999 min			
Voltage	220V/50Hz			
Power	800 W	1200 W	1600 W	2300 W
Harga	24.200.000	26.700.000	29.500.000	36.500.000

MODEL	PIN 9
Dimension (WxLxH)mm	310 x 276 x 298
Inner Chamber (WxLxH)mm	230 x 200 x 200
Cycle Mode	Natural Convection
Temp Range	RT+5-65°C
Temp Resolution Ratio	0.1°C
Temp Motion	±0.5°C
Temp Uniformity	±1.0°C
Timer	0-9999min (with timing wait function)
Sensor	PT 100
Power	220VAC/50Hz
Power	80 W
Shelf Number	2
Shelf Space	35 mm
Volume	9.2 L
Additional Function	Sensor deviation correction, temperature overshoot self-tuning, internal parameter locking, power-off parameter memory
Harga	9.500.000

PORTABLE INCUBATOR PIN 9



DIGITAL INCUBATOR IN 18L



MODEL	IN 18 L
Inner Dimension (WxLxH)mm	260 X 260 X 260
Exterior Dimension (WxLxH)mm	380 X 455 X 568
Range Temperature	RT + 5-65°C
Accuracy	0.1°C
Timer	0-9999 min
Voltage	220V/50Hz
Power	180W
Harga	12.600.000

Untuk produk yang tidak ada dalam catalog harap menghubungi kami, narga dapat berubah sewaktu-waktu



DIGITAL INCUBATOR + OVERLOAD

MODEL	IN 30 OL	IN 45 OL	IN 65 OL	IN 125 OL
Inner Dimension (WxLxH)mm	310 x 310 x 310	350 x 350 x 350	400 x 360 x 450	500 x 450 x 550
Exterior Dimension (WxLxH)mm	460 x 510 x 695	500 x 550 x 735	550 x 550 x 840	636 x 680 x 915
Range Temp.	RT + 5-120°C			
Accuracy	0.1°C			
Timer	0-9999 min			
Voltage	220V/50Hz			
Power	400W	500 W	700W	1100W
Harga	20.300.000	21.500.000	24.600.000	32.000.000

MODEL	IN 230 OL
Exterior Dimension (WxLxH)mm	735 X 835 X 1115
Chamber Dimension (WxLxH)mm	600 X 500 X 750
Temp. Range	RT + 5°C - 120°C
Temp. Accuracy	±0.1°C
Timer	0~9999 min
Voltage	220V/50Hz
Power	1500 W
Harga	50.500.000



BOD / REFRIGERATED INCUBATOR



MODEL	RIN 150 SS
Dimension Dalam (WxLxH)mm	490 x 400 x 750
Exterior Dimension (WxLxH)mm	646 x 641 x 1301
Accuracy	0.1°C
Range Temperature	0 - 65°C
Shelf Number	2/9
Shelf Space	35 mm
Cryogen	R134a
Compressor	Air Cooled Hermetic Compressor
Defrost structure	Automatic Control Intelligent Defrosting
Temp Motion	High Temp : ± 0.5 °C Low Temp : ± 1°C
Sensor	PT 100
Timer	0~9999 min
Voltage	220V/50Hz
Power	1000W
Safety device	Over temperature alarm
Advantage	LED light, Deviation correction, Menu Key Lock, Power Failure Parameter Memory
Harga	53.500.000

MODEL	HIN 150 SS
Interior Dimension (mm)	490 x 400 x 750
Exterior Dimension (mm)	646 x 641 x 1301
Temp. Range	With humidification 10-65°C Without humidification 0-65°C
Temp. Resolution Ratio	0.1°C
Temp. Fluctuation	High temp ± 1°C Low temp ± 0.5°C
Capacity	150 L
Cryogen	R134a
Compressor	Air cooled hermetic compressor
Humidity Range	45%~95% RH
Humidity Stability	±2% RH
Heating Power	2000W
Timer	0-9999 min x 30 section (with timing wait function)
Shelf Number	2/9
Shelf Space	35 mm
Supply power	220V/50Hz
Safety device	Over temperature alarm, mechanical temperature limiter
Advantage	LED light, Deviation Correction, Menu Key Lock Self Diagnosis of Power Failure Parameter Memory Loop
Harga	92.900.000

CLIMATE CHAMBER



ami, h bah

EMICAL, EQUIPMENT & GENERAL TRADING

SHAKING INCUBATOR SIC 50



MODEL	SIC 50
Inside Volume	50 L
Display	LCD Display
Temp. Control	PID Control
Temp. Range	RT + 5~65°C
Temp. Accuracy	± 0.2°C
Temp. Resolusi	0.1°C
Shaking Motion	Orbital 20 mm
Shaking Speed	30~300 rpm
Tray Plate	Spring Wire Rack
Tray Size	380 x 320 mm
Tray Load	≤ 10 Kg
Maximum Capacity Flask	100 mL x 16 / 250 mL x 10 500 mL x 6
UV Lamp	275 nm
Timer	0~9999 min
Voltage	220 VAC / 50 Hz
Power	600 W
Dimension Exterior	500 x 640 x 480 mm
Dimension Interior	455 x 380 x 290 mm
Harga	71.300.000

MODEL	SRIC 70
Inside Volume	70 L
Display	LCD Display
Temp. Control	PID Control
Temp. Range	4~65°C
Temp. Accuracy	± 0.2°C
Temp. Resolusi	0.1°C
Shaking Motion	Orbital 20 mm
Shaking Speed	30~300 rpm
Cooling System	Yes
Coolant	R134a
Tray Plate	Spring Wire Rack
Tray Size	480 x 315 mm
Tray Load	≤ 15 Kg
Maximum Capacity Flask	100 mL x 28 / 250 mL x 15 500 mL x 8 / 1000 mL x 6
UV Lamp	275 nm
Timer	0~9999 min
Voltage	220 VAC / 50 Hz
Power	800 W
Dimension Exterior	600 x 770 x 500 mm
Dimension Interior	560 x 390 x 320 mm
Harga	95.800.000

SHAKING REFRIGERATED INCUBATOR SRIC 70



Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu

CO2 INCUBATOR



MODEL	GAJ - 80	GWJ - 80
Heating Type	Air Jacket	Water Jacket
CO2 Control Type	Gas Proportion Type	
Temp. Range	RT+3°C-60°C (Room temperature:5°C-35°C)	
Temperature fluctuation	±0.2°C	
Temperature uniformity	±0.3°C	
Time Range	Continuous working or 1-9999min	
Humidification type	Water plate natural evaporation	
Disinfection Type	UV light	
Workroom Convection	Small Flow Forced Convection	
Exterior Dimension (WxLxH) mm	570 x 590 x 930	
Chamber Dimension (WxLxH) mm	410 x 405 x 510	
Workroom	80 L	
Weight	60 Kg	
Power	600 W	
Shelves	2	
Material	Outer Shell and Door: Cold-Rolled Plate Coated Internal Chamber : Stainless Steel Inner Door: Tempered Glass Heat Insulation: Centrifugal Glass Fiber	
Harga	98.000.000	110.000.000

MODEL	INA - 80	INW - 80
Heating Type	Air Jacket	Water Jacket
CO2 Control Type	Infrared Sensor with Solenoid Valve Control	
Temp. Range	RT+3°C-60°C (Room temperature:5°C-35°C)	
Temperature fluctuation	±0.2°C	
Temperature uniformity	±0.3°C	
Time Range	Continuous working or 1-9999min	
Humidification type	Water plate natural evaporation	
Disinfection Type	UV light	
Workroom Convection	Small Flow Forced Convection	
Exterior Dimension (WxLxH) mm	570x590x930	
Chamber Dimension (WxLxH)mm	410x405x510	
Workroom	80 L	
Weight	60 Kg	
Power	600 W	900 W
Shelves	2	
Material	Outer Shell and Door: Cold-Rolled Plate Coated Internal Chamber : Stainless Steel Inner Door: Tempered Glass Heat Insulation: Centrifugal Glass Fiber	
Harga	201.000.000	210.000.000

CO2 INCUBATOR



Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu

BOX FURNACE (BF)



MODEL	BF 2	BF 7
Max. Temperature	1000°C	
Chamber	Alumunium Silicate	
Timer	0-9999 min (with timing function)	
Power	2.500W	4.000W
Working size (mm)	200 X 120 X 80	300 X 200 X 120
Exterior size (mm)	595 X 410 X 467	790 X 500 X 527
Power Source	AC 220V / 23 A	AC 220V / 23 A
Harga	18.200.000	26.700.000

MODEL	FNC 2	FNC 7
Exterior Dimension (mm)	450 x 685 x 600	530 x 785 x 640
Chamber Dimension(mm)	120 x 200 x 80	200 x 300 x 120
Temp. Range	100~1.200°C	100~1.200°C
Accuracy	±1°C	±1°C
Volume	2L	7L
Voltage	220V/50Hz	220V/50Hz
Power	1.500W	3.000W
Harga	46.000.000	56.600.000

CERAMIC MUFFLE FURNACE (FNC)



1600 °C HIGH TEMPRATURE CERAMIC MUFFLE FURNACE (HTF)



MODEL	HTF 1600 8L	HTF 1600 12 L
Exterior Dimension (mm)	750 X 815 X 1100	750 X 865 X 1150
Chamber Dimension(mm)	300 X 150 X 150	300 X 200 X 200
Heating Power	9000 W	10000 W
Volume	8L	12 L
Sensor	S-type Thermocouple	
Temp Range	MAX 1600 °C	
Temp Accuracy	±1°C	
Voltage	380V/50Hz	
Additional Function	Heating Start Stop Button, Sensor fault Alarm, Temperature overshoot self setting, Temperature correction	
Safety Device	Overtemperature Alarm, Leakage protection, Door opening heating	
Harga	418.200.000	575.500.000

1700 °C HIGH TEMPRATURE CERAMIC MUFFLE FURNACE (HTF)

MODEL	HTF 1700 8L	HTF 1700 12L
Exterior Dimension (mm)	750 X 815 X 1100	750 X 865 X 1150
Chamber Dimension(mm)	300 X 150 X 150	300 X 200 X 200
Heating Power	9000 W	10000 W
Volume	8L	12 L
Sensor	B-Type Thermocouple	
Temp Range	MAX 1700 °C	
Temp Accuracy	±1°C	
Voltage	380V/50Hz	
Additional Function	Heating Start Stop Button, Sensor fault alarm, Temperature overshoot self setting, Temperature correction	
Safety Device	Overtemperature Alarm, Leakage protection, Door opening heating	
Harga	566.300.000	644.700.000



PH BENCH TOP METER



MODEL	PHS-3C
Measuring range	pH: 0.00-14.00 pH
Temperature	0-100 °C
Temp Resolution	0.1 °C
Temp Accuracy	± 0.5 °C
pH Accuracy	±0.02 pH
pH Resolution	0.01 pH
Operation Temp	0 °C-50 °C
Cable Power	± 1.5 M
Cable PH meter	± 75 cm
Harga	3.500.000

Model	RE 1100 V	RE 1100 H
Glass Material	GG-17	
Frame Material	Aluminium Alloy	
Bath Material	Aluminium Alloy +PTFE	
Rotary Flask	2 L 24#(Optionai 0.5-2L)	
Receiving Flask	1L 35# Ball Mill Mouth	
Motor Power	40W	
Rotary Speed	20-195rpm	
Evaporate Capacity	20ml/Min (Water)	
Vacuum Degree	0.098Mpa	
Heating Power	1.5KW	
Temp Range	0-200°C	
Accuracy	±1°C	
Lift	100mm+ 150mm (Manual Lift)	
Power Supply	220V/50Hz	
Dimensions	550x400x780mm	
Packing Size	720x525x385mm	
G.W.	40 (KG)	
Speed Regulation	E-CVT	
Temp Display	PT 100 Digital Display	
Temp Control Mode	Intelligent Temperature Control	
Seals	PFTE+ FKM	
Condenser	Vertical Condenser Φ 85x430mm	Horizontal Condenser Φ 85x430mm
Continuous Charging	19# Inlet Valve	
Harga	58.000.000	57.800.000

ROTARY EVAPORATOR



ROTARY EVAPORATOR



MODEL	RE 5100 V
Dimension	700 x 410 x 880 mm
Lift	120 mm (Electric Lift)
Temp Display	PT 100 Display
Glass Material	GG-17
Bath Material	Aluminium Alloy + PTFE
Seals	PFTE + FKM
Rotary Flask	5 L
Receiving Flask	2 L
Rotary Speed	0-180 rpm
Vacuum Degree	0.098 Mpa
Temp Range	0-99°C
Accuracy	± 1 °C
Evaporate Capacity	20ml/min (water)
Condenser	Vertical Condenser 100x590 mm
Continuous Charging	19 Inlet Valve
Motor Power	40 W
Heating Power	1500 W
Voltage	220V/50Hz
Harga	118.000.000

Untuk produk yang sudah ada di katalog atau untuk produk yang baru, silakan hubungi kami di nomor telepon atau email yang tertera di atas. Kami akan melayani Anda dengan sebaik-baiknya.


STAINLESS STEEL WATER DISTILLER (WD)



MODEL	WD 5L	WD 10 L	WD 20 L
Capacity	5 L/ hour	10 L/ hour	20L/ hour
Packing Size (mm)	390 X 370 X 830	390 X 370 X 860	420 X 420 X 1010
Voltage	220 V / 50 Hz	380 V / 50 Hz	380 V / 50 Hz
Power	4.500 W	7500 W	15000 W
Harga	8.700.000	14.700.000	18.200.000

MODEL	GAD 18	GABD 16
Water Yield	1800 ml/h	1800 ml/h
Dimension (mm)	700x200x680	700 x 340 x 800
Distillation Mode	Single Distillation	Double Distillation
Power	1500 W	3000 W
Voltage	220V/50Hz	
Characteristic	Heated by Quartz Pipe	
Harga	12.500.000	18.500.000

GLASS WATER DISTILLER

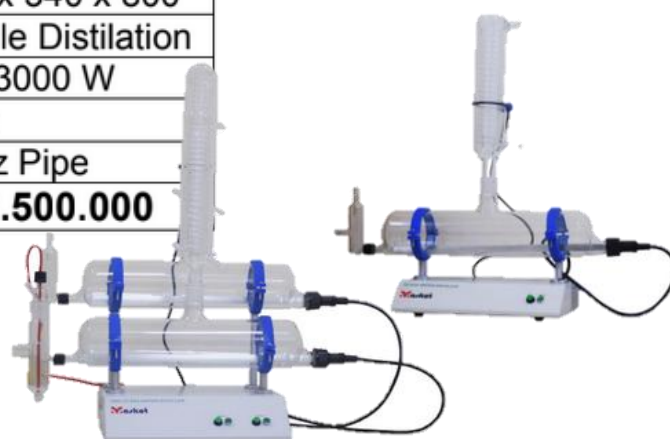

ESSENTIAL OIL DISTILLER (OD)

MODEL	OD 20 L
Material	Stainless Steel 304
Wall Thickness	1 mm
Bottom Thickness	1 mm
Tinggi	83,5 cm
Berat	8 kg
Harga	9.750.000



120M filter bag



alcohol meter (3in1)



thread seal tape



airlock & silicone stopper



pump 12W/220V



silicone tube 1.5m * 2pcs



false bottom



measuring cylinder (250ml)



temperature sticker

*Included Accesories

Untuk produk
sewaktu-waktu

DECOLORATION SHAKER (DOS)



MODEL	DOS 320
Exterior Dimension (WxLxH) mm	365 x 450 x 222
Tray Size mm	320x320
Shaking Mode	Cyclotron Oscilation
Amplitude	φ20mm
Rotary Speed Range	30-250 rpm
Rotary Speed Precision	±1rpm
Timer	0~9999 min
Voltage	220V/50Hz
Load per Tray	≤5Kg
Power	30 W
Harga	31.500.000

MODEL	AVM 2800
Rating Speed	1000-2800 rpm
Operation Method	Circling
Running Mode	Constant, Inching
Circling Diameter	4.4mm
Voltage	220VAC/50Hz
Output Power	30 W
Ambient Temperature	5-50°C
Dimension (mm)	180x120x180
Harga	5.100.000

VORTEX MIXER (AVM)



ULTRASONIC CLEANER (UC)



MODEL	UC 10 L
Frequency	40KHz
Transducer	4 pcs
Capacity	10L
Tank Size(L*W*H) mm	300*240*150
Unit Size (L*W*H) mm	325*265*280
Heating Power	450W
Ultrasonic Power	240 W
Timer	0-30min
Heater	RT-80°C
N.W/G.W (KG)	7.3/8.4
Degassing Function	YES
Harga	14.465.000

CIRCULATING WATER + VACUUM PUMP

MODEL	CWVP - 12
Water Circulation Speed	70 L / min
Maksimum VACuum	-0.98 bar
Voltage	220 V
Power	160 W
Vacuum Speed (1 Tap)	12L/min
Tapping	2
Max Length of Water Circulation	8 m
Water Tank Capacity	15 L
Water Tank Material	PP
Dimension (WxLxH)(mm)	400 X 290 X 440
Weight	15 Kg
Coating	PP
Ejector	PP
Tee	PP
Check Valve	PP
Nozzle Suction	PP
Pump	SS 304
Impeller	SS 304
Connecting Pipe	NR
Harga	14.800.000



ngi kami, harga dapat berubah

-25°C BIOMEDICAL FREEZER BMF-278



-25°C BIOMEDICAL FREEZER BMF-268



MODEL		BMF – 278	
Performance		Refrigeration System	
Temperature Range	-10 °C ~ -25°C	Compressor brand /QTY	1/CUBIGEL
Ambient Temperature	+10 °C ~ +32°C	Refrigerant	R 290
Controller	Microprocessor	Cooling Type	Direct Cooling
Display	Digital Display	Defrost Type	Manual
Electrical Data		Dimension	
Voltage Frequency	220-240 V/50- 60Hz	Capacity	278 L
Power (W)	180 W	Exterior Size (WxDxH) mm	670 x 640 x 1695
Current (A)	1.5 A	Interior Size (WxDxH) mm	480 x 415 x 1460
Power Consumption	3 kWh/24 h	Netto	85 Kg
Power Failure Alarm	8 H	Loading Qty (20'/40'/40'H)	24/51/51
Alarms		Other	
High/Low Temperature	Y	Caster	4
Sensor Error	Y	Remove Alarm Port	/
Power Failure	/	Inner Door	7
Door ajar	Y	Shelf	4
Thermostat Failure	Y	Test Hole	1/25 MM
Condenser Clean	/	Data Logger	Optional
Harga		72.500.000	

MODEL		BMF- 268	
Performance		Refrigeration System	
Temperature Range	-10 °C ~ -25°C	Compressor brand /QTY	1/CUBIGEL
Ambient Temperature	+10 °C ~ +32°C	Refrigerant	R 290
Controller	Microprocessor	Cooling Type	Direct Cooling
Display	Digital Display	Defrost Type	Manual
Electrical Data		Dimension	
Voltage Frequency	220/50Hz	Capacity	268 L
Power (W)	180 W	Exterior Size (WxDxH) mm	690 x 680 x 1635
Current (A)	1.4 A	Interior Size (WxDxH) mm	508 x 455 x 1137
Power Consumption	3 kWh/24 h	Netto	95 Kg
Power Failure Alarm	8 H	Loading Qty (20'/40'/40'H)	21/45/45
Alarms		Other	
High/Low Temperature	Y	Caster	4
Sensor Error	Y	Remove Alarm Port	Y
Power Failure	Y	Inner Door	4
Door ajar	Y	Shelf	3
Thermostat Failure	Y	Test Hole	1/25 MM
Condenser Clean	/	Data Logger	Optional
Harga		105.600.000	

Untuk produk ya.
sewaktu-waktu

-25°C BIOMEDICAL FREEZER

BMF-528



-25°C BIOMEDICAL FREEZER AND

REFRIGERATOR BMFR-368



MODEL		BMF - 528	
Performance		Refrigeration System	
Cooling Method	Direct Cooling	Compressor brand /QTY	China brand/2
Defrost	Manual	Condenser	Copper Tube
Refrigerant	R600a & R290	Temprature Controller	Microprocessor
Temprature Range	-10°C ~ -25 °C	Sensor	NTC
Ambient Temprature	10-32°C	Display	Digital Display
Electrical Data		Dimension	
Voltage Frequency	220/50Hz	Capacity	528 L
Power (W)	260 W	Exterior Size (WxDxH) mm	910 x 845 x 1875
Current (A)	1.9 A	Interior Size (WxDxH) mm	(651 x 631.5 x 635)x2
Alarms		Other	
High/Low Temprature	Y	Inside Door	9 Drawer x 2
Power Failure	Y	Test Hole QTY/Diameter	2/25 mm
Sensor Error	Y	Remote Alarm Port	Y
Temprature Controller Failure	Y	Castor	Y
Harga		185.300.000	

MODEL		BMFR- 368	
Performance		Refrigeration System	
Cooling Method	Direct Cooling	Compressor brand /QTY	China brand/2
Defrost	Manual	Condenser	Copper Tube
Refrigerant	R600a & R290	Temprature Controller	Microprocessor
Temprature Range	F: -10°C ~ -25 °C R : 2 °C -8 °C	Sensor	NTC
Ambient Temprature	10-32 °C	Display	Digital Display
Electrical Data		Dimension	
Voltage Frequency	220/50Hz	Capacity (L/cu.ft)	R : 183 F 185
Power (W)	300 W	Exterior Size (WxDxH) mm	720 x 830 x 1870
Current (A)	2.37 A	Interior Size (WxDxH) mm	R : 580 x 626 x 625 mm F : 466 x 636 x 625 mm
Alarms		Other	
High/Low Temprature	Y	Inside Door	Freezer Chamber Drawer x 6
Power Failure	Y	Test Hole QTY/Diameter	2/25 mm
Sensor Error	Y	Remote Alarm Port	Y
Temprature Controller Failure	Y	Castor	Y
Harga		135.000.000	

Untuk produk yang ti
sewaktu-waktu

-86°C ULTRA LOW TEMPERATURE FREEZER (LTF)



ULTRA-LOW TEMPERATURE STIRRING REACTION BATH (LSB)



MODEL		LTF 188 L	
Performance		Refrigeration System	
Temperature Range	-40°C ~ -86°C	Compressor brand /QTY	1/CUBIGEL
Ambient Temperature	+10 ~ +32°C	Refrigerant	Mixed
Controller	Microprocessor	Cooling Type	Direct Cooling
Display	Digital Display	Defrost Type	Manual
Electrical Data		Dimension	
Voltage	220V/50- 60Hz	Capacity	188 L
Power (W)	660 W	Exterior Size (WxDxH) mm	850 x 930 x 1595
Current (A)	4.3 A	Interior Size (WxDxH) mm	465 x 465 x 830
Power Consumption	8.2 kWh/24 h	Gross Weight	224 Kg
Power Failure Alarm	72 H	Loading Qty (20'/40'/40'H)	12/26/2026
Alarms		Other	
High/Low Temperature	Y	Data Logger	Optional
Sensor Error	Y	Remove Alarm Port	4
Power Failure	Y	USB Port	Y
Door ajar	Y	Inner Door /Shelf	3/2
High Ambient Temp	Y	Test Hole	1/25 MM
Condenser Clean	Y	Remote Alarm Port	Y
Low Battery	Y	CO2 back up system	Optional
Filter Screen Check	Y	LN2 back up system	Optional
Abnormal Voltage	Y	Cold Storage Box Loading QTY	10800
Thermostat Failure	Y		
Harga		285.000.000	

MODEL	LSB 510	LSB 520	LSB 530	LSB 540
Temperature Range	-10°C~RT	-20°C~RT	-30°C~RT	-40°C~RT
Storage Volume	5L			
Temperature Stability	±2°C			
Refrigeration capacity	280~620W	172~2228W	320~1150W	10~1300W
Power	420W	635W		954W
Voltage	220V 50HZ			
Max.Input Current	2.1A	2.9A		4.3A
Flow	20L/min			
Lift	4~6m			
Harga	49.800.000	65.600.000	76.800.000	86.800.000

Untuk produk yang
sewaktu-waktu

VACUUM FREEZE DRYER (Basic)



VACUUM FREEZE DRYER (Top-down)



MODEL		FD-10N	FD-12N	FD-18N
		-60A	-60A	-60A
		Basic type	Basic type	Basic type
Drying area	m ²	0.12	0.12	0.27
Tray	mm	200*4	200*4	240*4
Tray capacity	L	1.5	1.5	2
No-load temperature	°C	<-60 (-80 optional)		
Vacuum	Pa	<10pa		
Inter layer spacing	mm	70		
Vals number for reference	22	260	260	360
	16	480	480	740
	12	920	920	1320
Ability to capture water	KG	3	4	6
Voltage	V/Hz	220V/50Hz or 110V/60HZ		
Power	W	850	950	1300
Machine size	mm	500 x 400 x 370	500 x 400 x 650	800 x 530 x 900
Harga		135.000.000	138.500.000	220.000.000

MODEL		FD-10N	FD-12N	FD-18N
		-60B	-60B	-60B
		Top-down	Top-down	Top-down
Drying area	m ²	0.092	0.092	0.092
Tray	mm	200*3	200*3	200*3
Tray capacity	L	1	1	1
No-load temperature	°C	<-60 (-80 optional)		
Vacuum	Pa	<10pa		
Inter layer spacing	mm	70		
Vals number for reference	22	165	165	270
	16	285	285	560
	12	560	560	990
Ability to capture water	KG	3	4	6
Voltage	V/Hz	220V/50Hz or 110V/60HZ		
Power	W	850	950	1300
Machine size	mm	500*400*370	500*400*650	800*530*900
Harga		145.100.000	148.500.000	230.000.000

Untuk produk yang
sewaktu-waktu



SPECTROPHOTOMETER

MODEL	VS 3210	UVS 2010
Optical System	Single Beam, Grating 1.200 lines / mm	
WL Range	320~1.000nm	200~1.000 nm
WL Accuracy	±1.5 nm	
WL Repeatability	≤0.2 nm	
Spectrum Bandwith	4 nm	
Transmittance Accuracy	±0.5% (T)	
Transmittance Repeatability	≤0.2% (T)	
Transmittance Measuring Range	0-100 (T)	
Absorbance Measuring Range	0-2A	
Stray Light	≤0.2% (T) (at 360nm, NaNO ₂)	≤0.2% (T) (at 220nm, NaI)
Stability	±0.002A/h@500nm	
Noise	0.001A	
Display	128*64 Dots LCD	
Photometric Mode	T,A,C,E	
Photometric Range	0-200% T, -0.301-3.0A	
Light Source	Deuterium Lamp, Tungsten Lamp	
Compartment	Optional Solid Sample Holder, Micro Cell Holder, 100-100mm Cell Holder	
Advantages	Self diagnostic error, easy to use, automatic wavelength setting, internal calibration, can be connected to a computer, result can be converted to curve	
Harga	46.000.000	68.000.000

DOUBLE BEAM SPECTROPHOTOMETER (DBS)

MODEL	DBS 1911
Optical System	Double Beam, Grating 1200 Lines mm
WL Range	190 – 1100 nm
WL Accuracy	±0.3 nm
Operation Mode	A,T,C,E
Spectrum Bandwith	1 nm
Stray Light	≤0.2% (T) (at 360nm, 220 nm)
Detector	Silicon Photodiode
Photometric Range	0 – 200 % T, 0,301 – 3,0 A
Light Source	Deuterium Lamp, Tungsten Lamp
Noise	0.0002Abs
Sample Rack	Adjustable 1-5 cm
Output	USB-A*Print and Data OutPut USB-B Connect PC
Support Conenction	USB, WiFi, Bluetooth and Support A4 printing at the same time
Harga	358.200.000



ah

PROTEIN CHAIN SPECTROPHOTOMETER



MODEL		PCS 1891
Light Source		Xenon Flash Lamp
Detector		2048 CCD
Sample Volume		0.5 – 2 ul
Minimum Light Path		0.05 mm
Wavelength Range		185-910 nm
Wavelength Accuracy		±1nm
Spectral Resolution		1.8 nm (FWHM at Hg 257.3 nm)
Absorbance Accuracy		3% (0.65 absorbance at 350 nm)
Photometric Accuracy		±0.002 A (1mm path length)
Photometric		0.001 A (1 mm path length)
Concentration Range		2-15000 ng/ul dsDNA
Measurement Time		≤ 5 second
Cuvette	Heating	37 ± 0.5 °C
	Mixing	150 – 850 rpd
	Light Path	10,5,2,1 nm
	Concentrate	0.4-750 ng/ul dsDNA
Output		USB
Wireless Connection		WiFi
Voltage		AC 110 – 220V 50 Hz/60Hz
Dimension (mm)		220 x 135 x 180
Weight		2.1 Kg
Harga		490.800.000

FLAME PHOTOMETER

MODEL	MFP 2
Display	LED Screen Dual Channel Value Scale
Spectral Method	Interference Filter
Operation	Menu-Style Keyboard
Stability	in 15 second ≤ 3 %
	in 5 min ≤ 5 %
Response Time	≤ 8 s
Repeatability	≤ 3 %
Sample Uptake	≤ 6 ml / min
Test Limit	K : ≤ 0.004mmol/L Na : ≤ 0.008 mmol/L
Linearity Error	K : ≤ 0.005mmol/L Na : ≤ 0.03 mmol/L
Test Range	K: 0-100 ug/ml Na : 0-160 ug/ml
Filter Light Transmission Characteristic	K : wavelength error absolutes ≤ 7 nm, half width ≤ 15 nm, background transmittance ≤ 0.5%
	Na : peak wavelength error absolute ≤ 5 nm, half width ≤ 15 nm, background transmittance ≤ 0.5 %
Printer	Optional
Advantage	automatic calculation of correlation and coefficient, connect with computer, flame size pre-selected, flameout protection device
Application Areas	Ceramics, medical Clinics, cement, glass, refractory Materials, Third Party Testing, Soil Fertilizers, Professional Institutions
Harga	92.000.000



Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu

OXYGEN BOMB CALORIMETER



MODEL	DBC 15000 J
Heat Capacity	14400 J/K - 15000 J/K
Resolution	0.001 K
Measurement Accuracy	± 60J/g
Repeatability	≤±0.2%
Pressure Endurance	20 Mpa
Temp. Measure Range	10°C-35°C
Ambient Temp	20 ± 5 °C
Fluctuation	≤ 1 °C
Data Saved	31 pieces
Relative Humidity	≤ 85 %
Voltage	220V/50Hz
Dimension	600 x 460 x 430
Harga	179.200.000

MODEL	FPM 350	
Method	ASTM D93	
	ISO 2719	
	DIN 51758	
	IP 34	
Temprature Range	35°C – 350 °C	
Temprature Rate	Variable, Manually Controlled	
Voltage	220 Vac / 50 Hz	
Power	650 W	
Include	Internal Stirring Motor	
	Glass Thermometer	-30°C - 170 °C
		0 °C - 400°C
	Brass Test Cup	
Dimension (mm)	230 X 250 X 150	
Harga	39.800.000	

FLASHPOINT



MELTING POINT



MODEL	AMP 1
Range Temp.	50°C - 300°C
Rate Temp.	1°C/min 2°C/min 4°C/min 6°C/min
Number of Sample	3
Accuracy	±1°C
Voltage	220 VAC / 50 Hz
Power	200 W
Dimension (mm)	120 X 190 X 200
Harga	18.200.000

Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu

FLOKULATOR DIGITAL

MODEL	SP - 4S
Material	Plat besi 1 mm dengan pengecatan lapisan bubuk
Batang Pengaduk SS 304	4 buah
Kecepatan Putaran	18 – 260 rpm
Pengaturan Waktu	0.05 detik s.d 10 jam
RPM Digital dapat di sesuaikan	Ya
Tegangan Listrik	220 VAC / 50 Hz
Power Listrik	43 W
Lampu LED	10 W
Berat	17 Kg
Dimensi Alat (P x L x T)	65 x 30 x 36 cm
Dimensi Alat Setelah di Packing Kayu	77 x 40 x 45 cm
Harga	22.500.000



KINEMATIC VISCOMETER

MODEL	KV 2000			
Standards	GB265-88	GB1814	ASTM D445	IP71
Four Glass Capillary Viscometer	ISO 3105 • (5.4~27) • (13~65) • (28~140) • (70~305)			
Display	Precise Digital Temperature Controller Highlighted Digital Stopwatch Timer			
Temperature Control Range	RT~180°C			
Testing Range	Kinematic Viscosity : 0.5~20000 cSt			
Temperature Control Accuracy	±0.1°C			
Timing Accuracy	±0.1S			
Timing Range	0.1S - 999.9 S			
Temperature Test Components	Imported Precision Platinum Electric Resistance			
Stirring Speed	1350 Rounds/Min			
Heating power	1200W			
Sample Installing Quantity	4 pieces			
Working Environment	Temperature: 15°C - 35°C Relative Humidity: <85%			
Power Supply	AC 220V ±10% 50Hz			
Dimension	440*310*500 (L*W*H)			
Harga	80.000.000			

MULTIFUNCTION LAB EMULSIFIER



Untuk produk ini ada dalam
sewaktu-waktu

MODEL	SCH 11000		
Speed Range	300-11000 rpm		
Speed Control	Stepless Speed Control		
Capacity	300-10.000 ml (air)		
Rated Torque	0.96 Nm		
Working Head Diameter	Φ 70 Ncm		
Working Head Max Torque	93 Ncm		
Voltage	220V/50Hz		
Power	500 W		
Dimension	360 x 260 x 760 mm		
Function (3in1)	Stirring	Cutting	High Shear
Harga	27.600.000		

TABLET HARDNESS TESTER

MODEL	TH 1	TH 3
Hardness Range	2~200 N	2~200 N
Accuracy	± 1.5%	± 1.5%
Probe Procession	20 mm	40mm
Test Period	-	≥ 30 S / P
Max number in Each Group	-	100 P
Voltage	220V/50Hz	220V/50Hz
Weight	5 Kg	9 Kg
Power	10W	60W
Dimension (mm ³)	28 x 18 x 11	40 x 24 x 14
Printer	-	-
Harga	28.150.000	64.450.000



TABLET DISINTEGRATOR TESTER



MODEL	TDI 1	TDI 2
Dimension (mm ³)	260 x 300 x 420	400 x 320 x 440
Basket Assembly	1	2
Temperature Range	RT ~ 45°C	20 – 45 °C
Basket Lifting Frequency	30 ~ 32/min	
Basket Lifting Distance	± 1 mm	
Time Range	1 ~ 900 min	
Temp. Control Accuracy	± 0.5°C	
Voltage	220V / 50Hz	
Power	600W	
Harga	25.800.000	32.400.000

MODEL	TDS 1	TDS 3
Speed Range	20~200 rpm	20~200 rpm
Feature	1 vessels , 1 poles	3 vessels , 3 poles
Speed Accuracy	± 2 rpm	± 2 rpm
Temperature Range	20 +45°C	20 +45°C
Temperature Stability	± 0.3°C	± 0.5°C
Preset Timing Nine Points	1~900 min	1~900 min
Time Accuracy	± 0.5 min	± 0.1 min
Paddle Radial Run-Out	± 0.5 mm	± 0.5 mm
Basket Radial Run-Out	± 1.0 mm	± 1.0 mm
Centering	± 2.0 mm	± 2.0 mm
Voltage	220 V / 50 Hz	220 V / 50 Hz
Power	600W	600W
Dimension (cm ³)	26 x 30 x 48	46 x 30 x 47
Harga	46.900.000	79.000.000

TABLET DISSOLUTION TESTER



Untuk produk yang tidak ada dalam catalog harap menghubungi kami, harga dapat berubah sewaktu-waktu