




SPAREPARTS

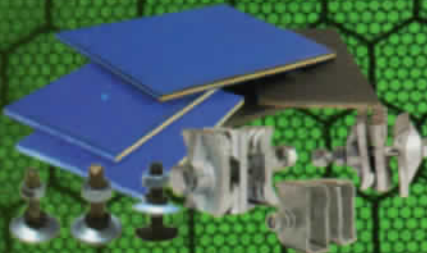


Bucket Elevator
Spareparts

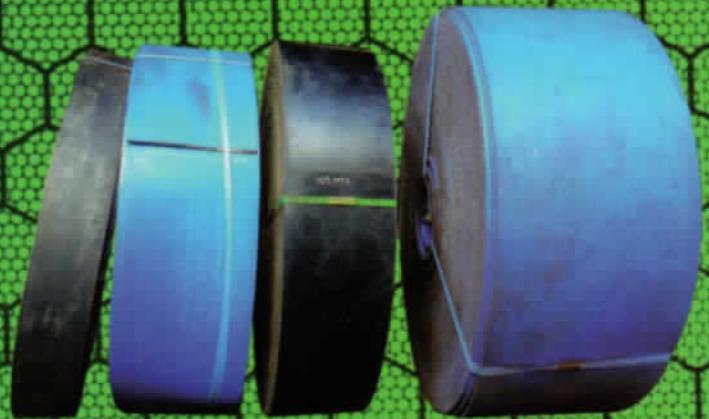


Belt Elevator

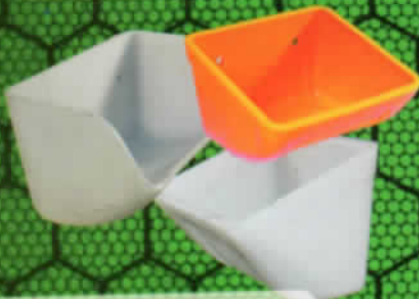

Bucket Elevator

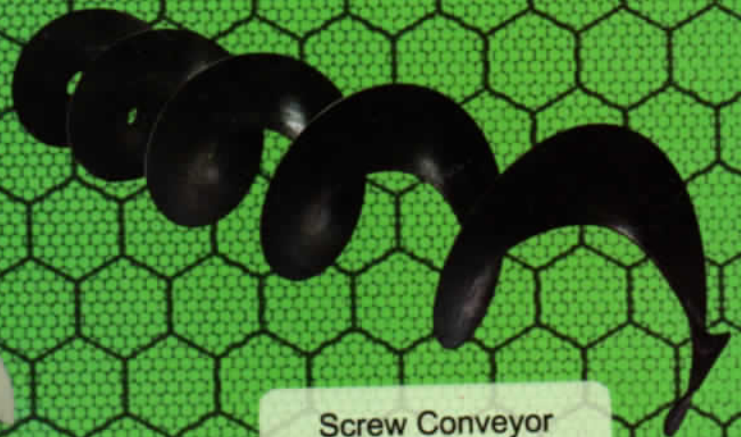


Screw Conveyor
Spareparts

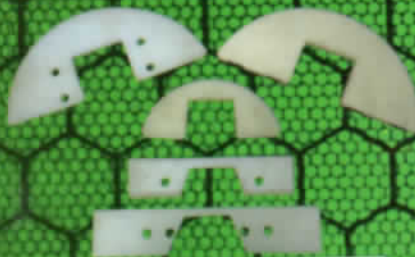

Scraper Drag Chain
Conveyor




Drag Chain Link
Spareparts

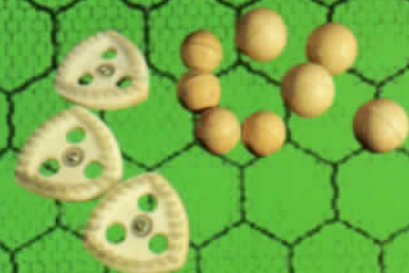


Parts Sieve Cleaner

SCREW CONVEYOR

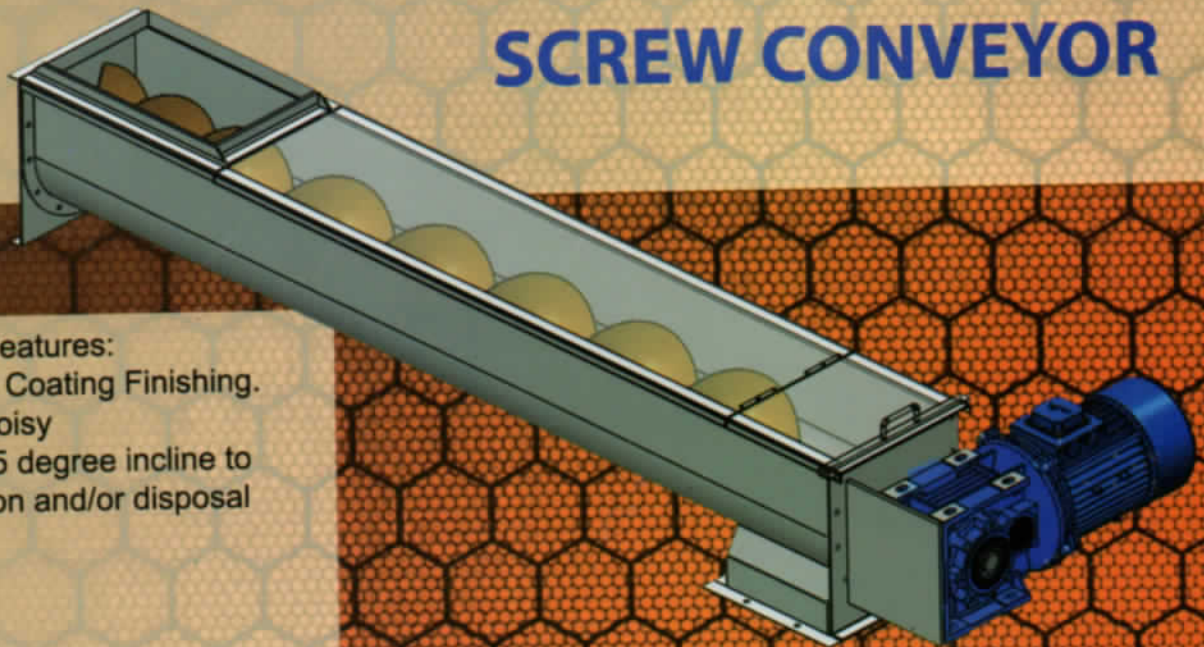

Features:

- Galvanized or Coating Finishing.
- No sound is noisy
- Has up to a 55 degree incline to storage location and/or disposal location



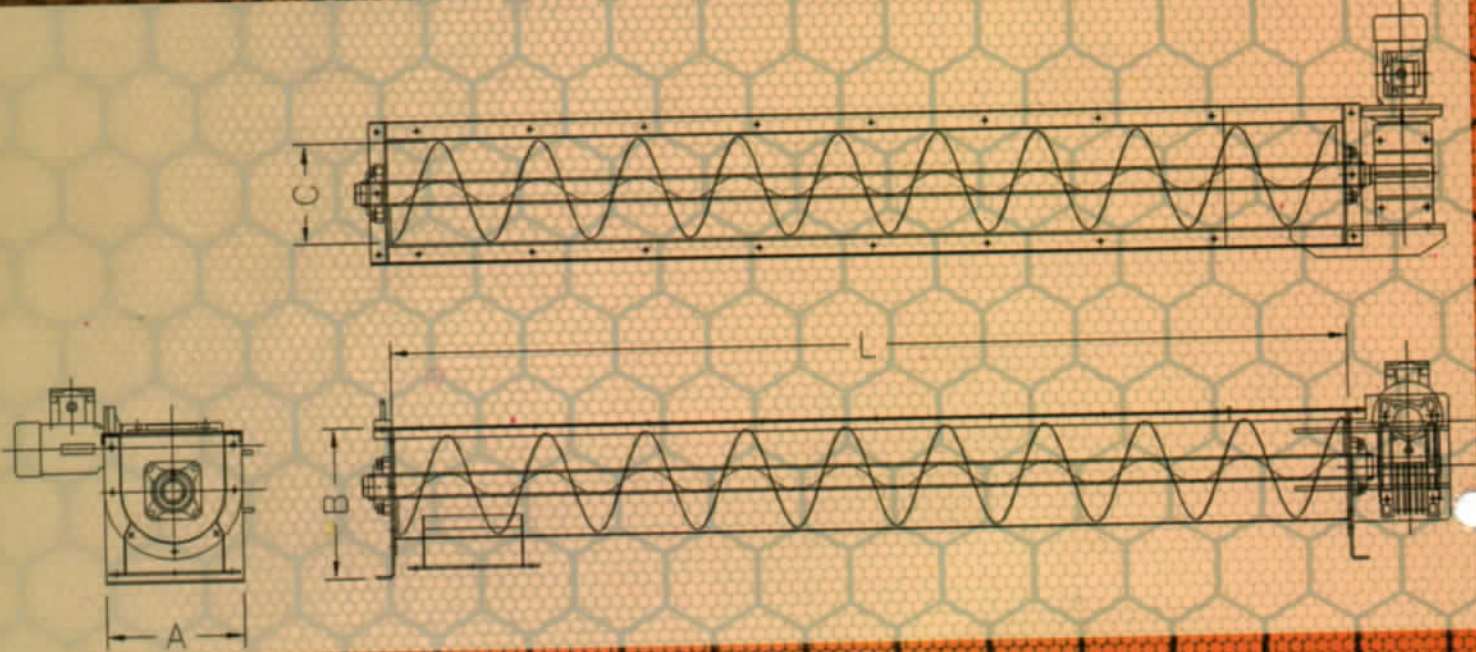


Type	FSC 150-150	FSC 200-200	FSC 250-250
Capacity (TPH)	10	20	50
Diameter (mm)	150	200	250
Drive Motor (kW/HP)	2,2 / 3	4 / 5,5	5,5 / 7,5

Frontec
Frontec Agritama Engineering

Frontec Agritama Engineering
Komplek Safe n Lock
Blok C-2376, Lingkar Timur - Sidoarjo
Telp. +62 31 - 8066135 ; Fax. +62 31 - 8067199
www.frontec.co.id

RIBBON MIXER

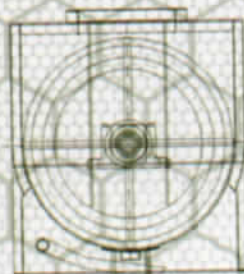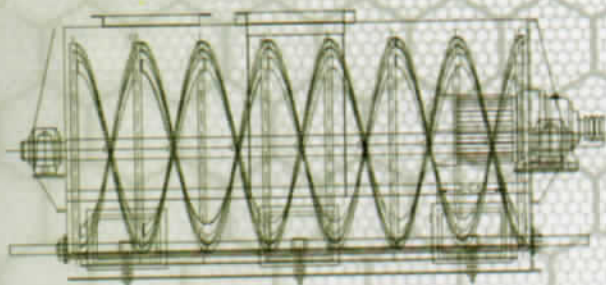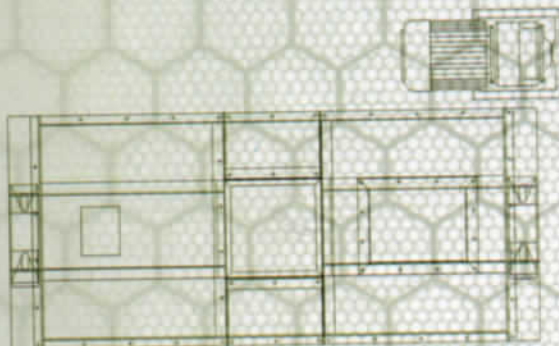

Features:


- Pneumatic Boomdoors
- Transaprant Side In-spection window
- The new design makes more optimal mixing.
- Mixing time is relatively short , only 1-2 minutes.

Type	FR RM-25	FR RM-50	FR RM-100
Capacity (L)	500	1000	2000
Dimension (mm)	1200x1150x1000	1500x1300x1150	1900x1650x1450
Motor Drive (kW/HP)	7,5/10	11/15	22/30


Frontec
Frontec Agritama Engineering

Frontec Agritama Engineering
Komplek Safe n Lock
Blok C-2376, Lingkar Timur - Sidoarjo
Telp. +62 31 - 8066135 ; Fax. +62 31 - 8067199
www.frontec.co.id

BUCKET ELEVATOR

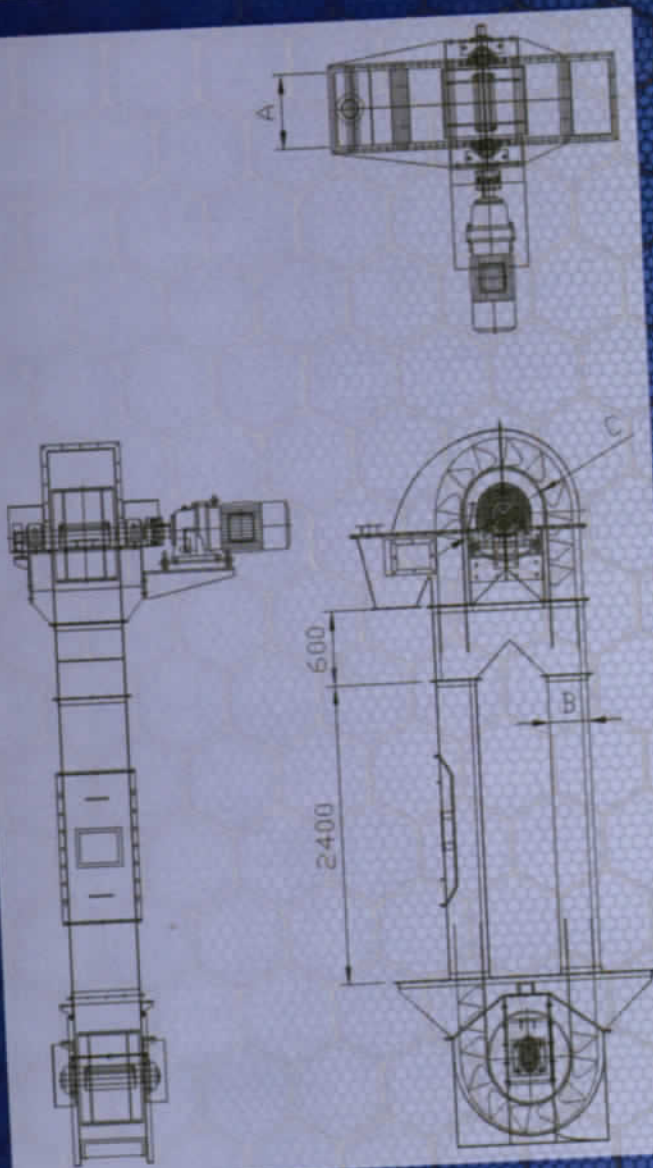

- Features:
- Galvanized or Coating Finishing.
 - Round Bottom Elevator Design
 - With Double Inspection Hole
 - Upper Drum with Rubber Leaging

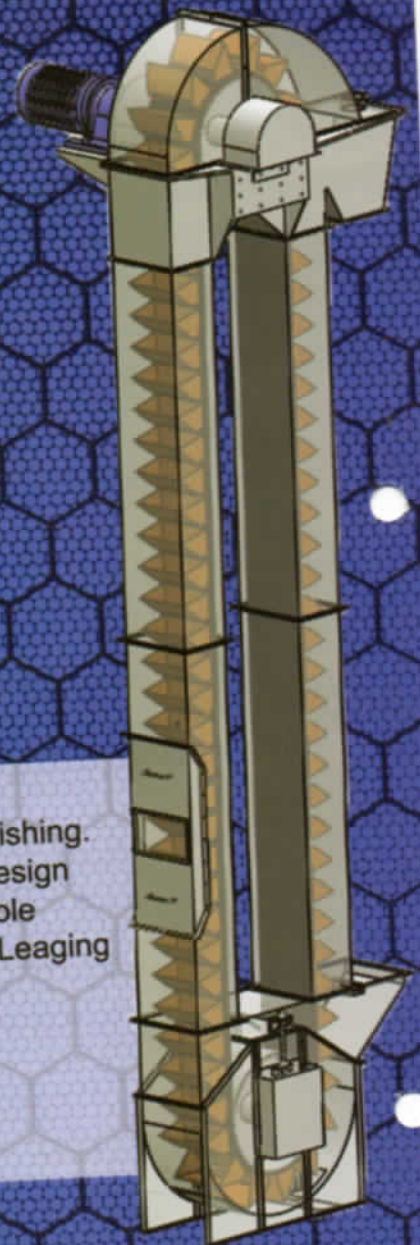


Type	BE 250-300	BE 250-350	BE 600-350
Capacity (TPH)	50	80	200
Diameter (mm)	600	600	750

Frontec
Frontec Agritama Engineering


Frontec Agritama Engineering
Komplek Safe n Lock
Blok C-2376, Lingkar Timur - Sidoarjo
Telp. +62 31 - 8066135 ; Fax. +62 31 - 8067199
www.frontec.co.id

DRAG CHAIN CONVEYOR

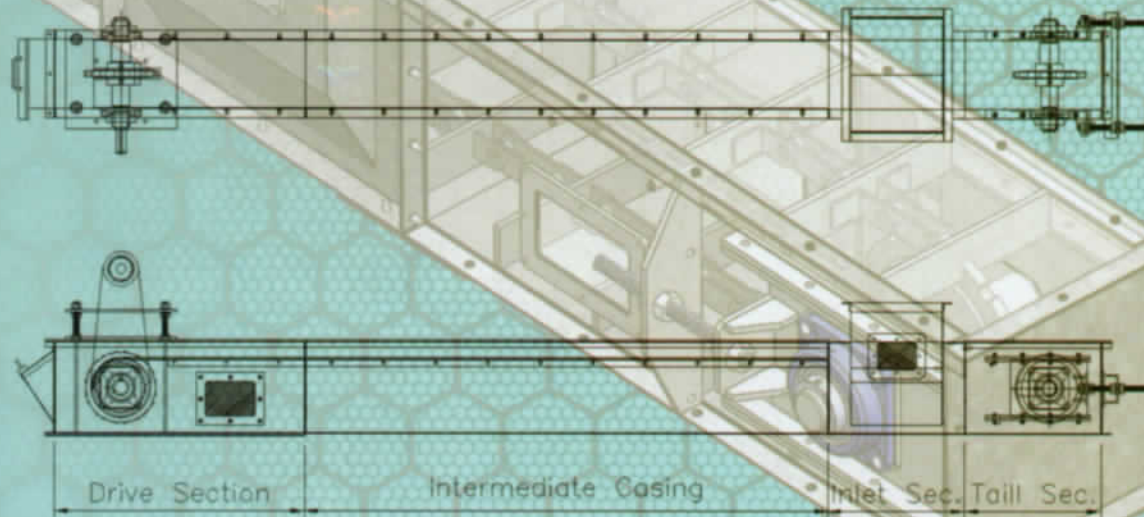


Features:

- Galvanized or Coating Finishing.
- Transparent side window inspection
- No sound is noisy
- Has up to a 35 degree incline to storage location and/or disposal location
- Design intake that makes it more efficient

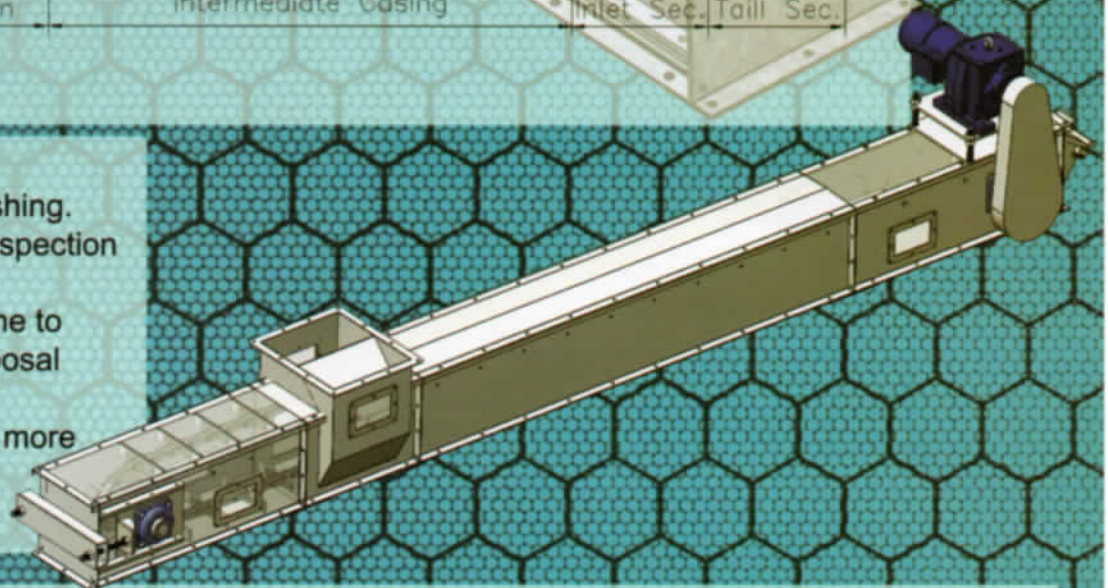

Type	FR 250-260	FR 300-330	FR 400-370	FR 600-550
Capacity (TPH)	20	40	60	200
Dimension (mm)	-	-	-	-
Drive Sec. (mm)	1100	1100	1200	1200
Casing (mm)	2300	2300	2400	2400
Taill Sec. (mm)	600	600	1200	1200
Inlet Sec. (mm)	600	600	1200	1200

CONTINUOUS GRAIN DRYER

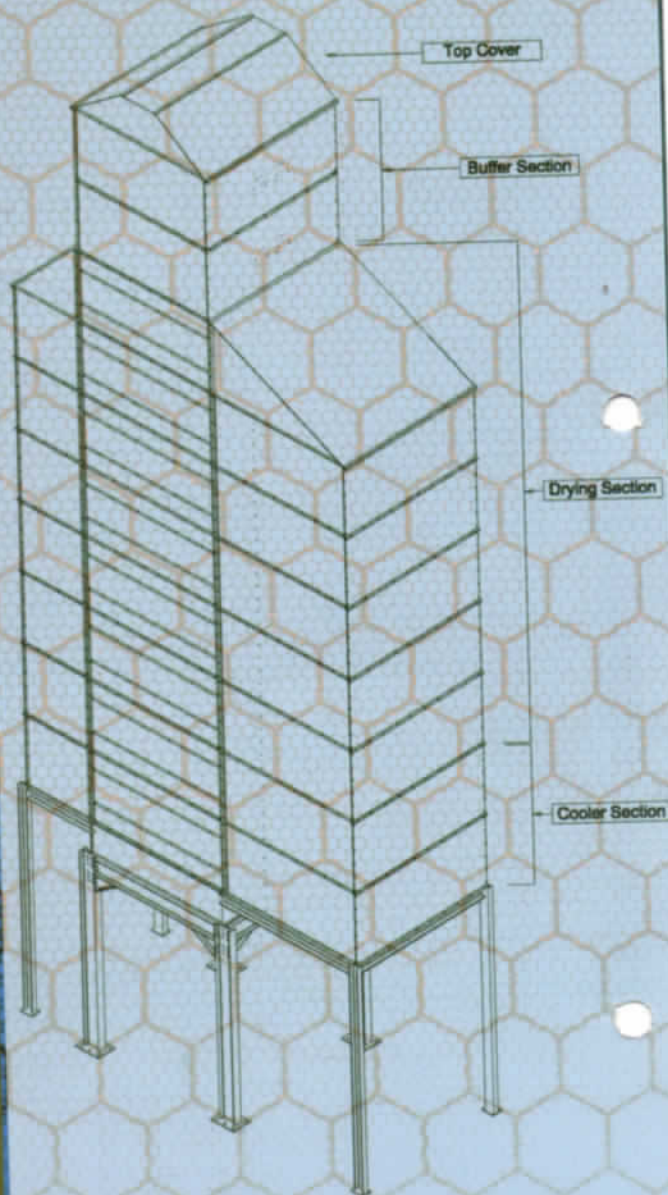

Type	FR 05D	FR 10D	FR 20D	FR 30D	FR 40D
Capacity (T/H)	5 TPH	10TPH	20TPH	30TPH	40TPH
Dimension (mm)	5860x2425xH (Adjusted to capacity)				
Burner/Furnace	Natural Gas, Diesel, Husk Furnace, Coal.				

Frontec
Frontec Agritama Engineering

Frontec Agritama Engineering
Komplek Safe n Lock
Blok C-2376, Lingkar Timur - Sidoarjo
Telp. +62 31 - 8066135 ; Fax. +62 31 - 8067199
www.frontec.co.id