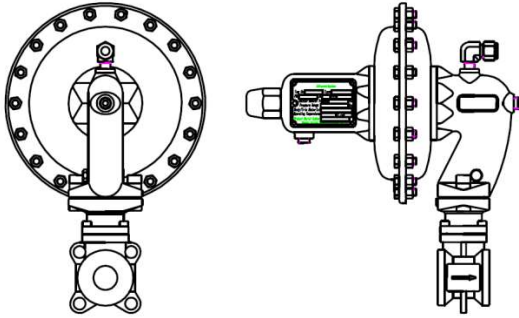
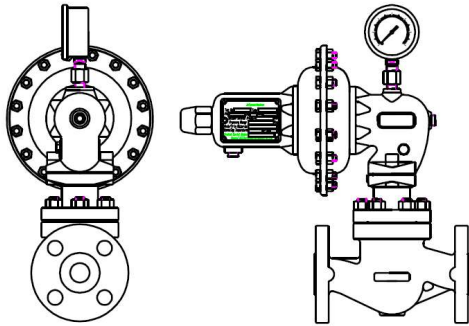
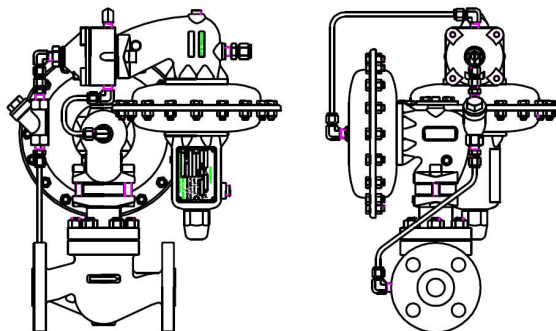


SP429 – Low Pressure Regulator

Operation: Low Pressure Regulator
Size: ½" – 1" (DN15 – DN25)
Pressure Rating: PN16
ANSI 150LB
Body Material: CS, 304SS, 316SS, 316L SS
Internal Material: 304SS, 316SS, 316L SS
Shutoff Class: Class VI (Soft Seat)
Operating Temperature: -48°C to 120°C
Set Pressure Range: 2 mbar (min)
150 mbar (max)

SP90H – Pressure Regulator


Operation: Pressure Regulator
Size: ½" – 2" (DN15 – DN50)
Pressure Rating: PN16, PN40, PN64
ANSI 150LB, 300LB, 600LB
Body Material: CS, 304SS, 316SS, 316L SS
Internal Material: 304SS, 316SS, 316L SS
Shutoff Class: Class IV (Metal Seat)
Class VI (Soft Seat)
Operating Temperature: -48°C to 120°C
Set Pressure Range: 30 mbar (min)
15 bar (max)

SP592 – Low Pressure Regulator

Operation: Low Pressure Regulator
Size: ½" – 4" (DN15 – DN100)
Pressure Rating: PN16, PN40, PN64
ANSI 150LB, 300LB, 600LB
Body Material: CS, 304SS, 316SS, 316L SS
Internal Material: 304SS, 316SS, 316L SS
Shutoff Class: Class VI (Soft Seat)
Operating Temperature: -48°C to 120°C
Set Pressure Range: 1.5 mbar (min)
110 mbar (max)


LINKMET CONTROLS PTE LTD**192 Pandan Loop #07-27 Pantech Business Hub Singapore 128381****Tel: (65) 6872 5682 Fax: (65) 6872 5638****Email: sales@linkmet.com**

SP3000 – Single Base Pressure Reducing / Back Pressure Regulator

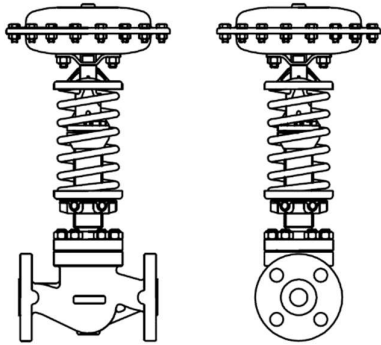


Operation: Single Base Pressure Reducing /
Back Pressure Regulator
Size: ½" – 2" (DN15 – DN50)
Pressure Rating: PN16, PN40, PN64
ANSI 150LB, 300LB, 600LB
Body Material: CS, 304SS, 316SS, 316L SS
Internal Material: 304SS, 316SS, 316L SS
Shutoff Class: Class IV (Metal Seat)
Class VI (Soft Seat)
Operating Temperature: -48°C to 300°C
Set Pressure Range: 30 mbar (min)
30 bar (max)

SP4000 – Cage Pressure Reducing / Back Pressure Regulator

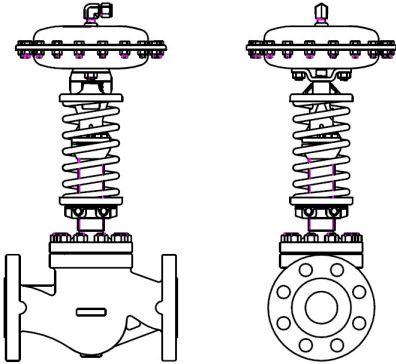

Operation: Cage Pressure Reducing /
Back Pressure Regulator
Size: 1½" – 8" (DN40 – DN200)
Pressure Rating: PN16, PN40, PN64
ANSI 150LB, 300LB, 600LB
Body Material: CS, 304SS, 316SS, 316L SS
Internal Material: 304SS, 316SS, 316L SS
Shutoff Class: Class IV (Metal Seat)
Class VI (Soft Seat)
Operating Temperature: -48°C to 300°C
Set Pressure Range: 30 mbar (min)
30 bar (max)

SP9000 – Balanced Bellows Pressure Reducing / Back Pressure Regulator

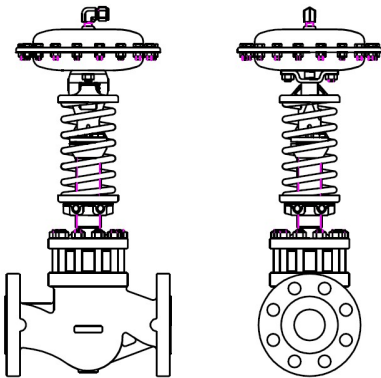

Operation: Balanced Bellows Pressure Reducing /
Back Pressure Regulator
Size: 1½" – 8" (DN40 – DN200)
Pressure Rating: PN16, PN40, PN64
ANSI 150LB, 300LB, 600LB
Body Material: CS, 304SS, 316SS, 316L SS
Internal Material: 304SS, 316SS, 316L SS
Shutoff Class: Class IV (Metal Seat)
Class VI (Soft Seat)
Operating Temperature: -48°C to 300°C
Set Pressure Range: 30 mbar (min)
30 bar (max)

LINKMET CONTROLS PTE LTD

192 Pandan Loop #07-27 Pantech Business Hub Singapore 128381

Tel: (65) 6872 5682 Fax: (65) 6872 5638

Email: sales@linkmet.com