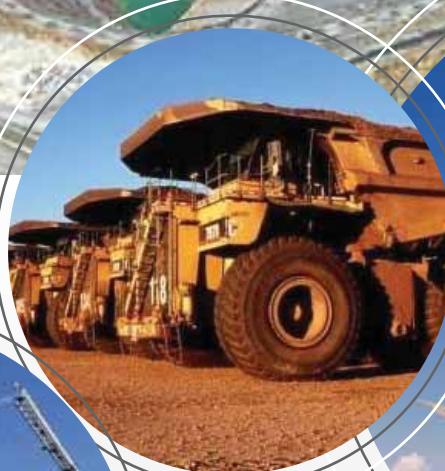




# CV. JAYA MAJU MANDIRI

## PRODUCT CATALOG



SUMITOMO RIKO

**manuli**<sup>®</sup>  
HYDRAULICS

**1 W/B**

**HOSE STRUCTURE**

INNER COVER : OIL RESISTANT SYNTHETIC RUBBER  
REINFORCEMENT : STEEL  
OUTER COVER : OIL&OZONE RESISTANT SYNTHETIC RUBBER

**RECOMENDED FLUIDS**

MINERAL SYNTHETIC OIL

**OPERATING TEMPERATURE**

-40°C ~ +100°C

**2 W/B**

**HOSE STRUCTURE**

INNER COVER : OIL RESISTANT SYNTHETIC RUBBER  
REINFORCEMENT : STEEL  
OUTER COVER : OIL&OZONE RESISTANT SYNTHETIC RUBBER

**RECOMENDED FLUIDS**

MINERAL SYNTHETIC OIL

**OPERATING TEMPERATURE**

-40°C ~ +100°C

**4 W/S**

**HOSE STRUCTURE**

INNER COVER : OIL RESISTANT SYNTHETIC RUBBER  
REINFORCEMENT : STEEL  
OUTER COVER : OIL&OZONE RESISTANT SYNTHETIC RUBBER

**RECOMENDED FLUIDS**

MINERAL SYNTHETIC OIL

**OPERATING TEMPERATURE**

-40°C ~ +120°C

**4 W/S**

**HOSE STRUCTURE**

INNER COVER : OIL RESISTANT SYNTHETIC RUBBER  
REINFORCEMENT : STEEL  
OUTER COVER : OIL&OZONE RESISTANT SYNTHETIC RUBBER

**RECOMENDED FLUIDS**

MINERAL SYNTHETIC OIL

**OPERATING TEMPERATURE**

-40°C ~ +120°C

**6 W/S**

**HOSE STRUCTURE**

INNER COVER : OIL RESISTANT SYNTHETIC RUBBER  
REINFORCEMENT : STEEL  
OUTER COVER : OIL&OZONE RESISTANT SYNTHETIC RUBBER

**RECOMENDED FLUIDS**

MINERAL SYNTHETIC OIL

**OPERATING TEMPERATURE**

-40°C ~ +120°C

DIB-1SN												
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight	
	min.	max	min.	max	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m
-6	6.4	6.8	13.1	13.9	3,250	22.5	13,000	90.0	2.36	60	0.16	230
-8	7.8	8.4	14.6	15.4	3,120	21.5	12,480	86.0	2.56	65	0.18	270
-10	9.8	10.1	16.7	17.5	2,600	18.0	10,400	72.0	2.76	70	0.22	325
-12	12.8	13.2	20.0	20.8	2,320	16.0	9,280	64.0	3.15	80	0.28	420
-16	15.8	16.5	23.2	24.4	1,880	13.0	7,520	52.0	4.33	110	0.34	500
-19	18.9	19.7	26.9	28.1	1,520	10.5	6,080	42.0	5.12	130	0.44	655
-25	25.2	26.3	35.3	36.5	1,280	8.8	5,120	35.2	6.69	170	0.66	970
-31	31.4	32.8	42.4	43.8	920	6.3	3,680	25.2	8.27	210	0.80	1,180
-38	37.7	39.1	49.3	51.1	725	5.0	2,900	20.0	9.45	240	0.99	1,465
-51	50.4	51.8	62.6	64.6	580	4.0	2,320	16.0	12.20	310	1.36	2,015

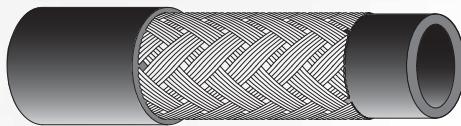
DIB-2SN												
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight	
	min.	max	min.	max	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m
-6	6.4	6.8	14.5	15.3	5,800	40.0	23,200	160.0	3.15	80	0.24	355
-8	7.8	8.4	16.2	17.0	5,100	35.0	20,400	140.0	3.54	90	0.29	435
-10	9.8	10.1	18.3	19.1	4,780	33.0	19,120	132.0	3.94	100	0.36	535
-12	12.8	13.2	21.1	22.3	4,000	27.5	16,000	110.0	3.94	100	0.43	630
-16	15.8	16.5	24.5	25.5	3,620	25.0	14,480	100.0	4.72	120	0.50	740
-19	18.9	19.7	28.5	29.7	3,120	21.5	12,480	86.0	5.51	140	0.65	965
-25	25.2	26.3	37.3	38.5	2,400	16.5	9,600	66.0	7.09	180	0.96	1,415
-31	31.4	32.8	46.2	47.6	1,800	12.5	7,200	50.0	8.66	220	1.30	1,915
-38	37.7	39.1	53.2	54.6	1,300	9.0	5,200	36.0	10.24	260	1.53	2,255
-51	50.4	51.8	65.8	67.4	1,150	8.0	4,600	32.0	12.60	320	2.00	2,960

DHD-4SP												
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight	
	min.	max	min.	max	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m
-10	9.3	10.1	20.5	21.7	6,500	44.5	26,000	178.0	5.12	130	0.48	715
-12	12.7	13.1	23.8	24.8	6,000	41.5	24,000	166.0	5.51	140	0.63	925
-16	15.8	16.2	27.4	28.6	5,100	35.0	20,400	140.0	6.30	160	0.75	1,115
-19	19.0	19.4	31.2	32.4	5,100	35.0	20,400	140.0	7.87	200	0.98	1,450
-25	25.2	26.3	38.7	40.1	4,000	28.0	16,000	112.0	9.06	230	1.32	1,945

DHD-4SH												
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight	
	min.	max	min.	max	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m
-19	19.0	19.4	31.2	32.4	6,100	42.0	24,400	168.0	9.06	230	0.98	1,450
-25	25.2	26.3	38.1	39.5	5,500	38.0	22,000	152.0	9.45	240	1.36	2,010
-31	31.4	32.8	44.7	46.7	4,500	32.5	18,000	130.0	9.84	250	1.74	2,565
-38	37.7	39.1	52.0	54.0	4,200	29.0	16,800	116.0	12.20	310	2.12	3,130
-51	50.4	51.8	66.8	68.8	3,620	25.0	14,480	100.0	17.72	450	3.37	4,975

DHD-R15												
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight	
	min.	max	min.	max	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m
-31	31.4	32.8	48.7	50.7	6,100	42.0	24,400	168.0	12.60	320	2.55	3,770
-38	37.7	39.1	56.8	58.8	6,100	42.0	24,400	168.0	14.96	380	3.41	5,040
-51	50.4	51.8	71.9	74.3	6,100	42.0	24,400	168.0	18.90	480	5.00	7,390

# TRACTOR®/1T



## MAIN APPLICATIONS

Low-medium pressure lines, return lines

## CONTINUOUS SERVICE TEMPERATURE RANGE

-40°C / +100°C

-40°F / +212°F

## MAX OPERATING TEMPERATURE

121°C / 250°F (intermittent service)

## RECOMMENDED FLUIDS


Mineral oils, vegetable and rape seed oils, glycol and polyglycol based oils, synthetic ester based oils, oils in aqueous emulsion, water

REMARK Halogen-Free hose line

EN 853 1SN

PART. REF.	HOSE SIZE			R.O.D.		O.D.		bar MAX W.P.		BURST PRESSURE		MIN. BEND RADIUS		kg WEIGHT	
	DN	dash	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	g/m	lb/ft
H02004005	5	-3	3/16"	9,5	0,37	11,5	0,45	250	3620	1000	14500	89	3,50	195	0,13
H02004A06	6	-4	1/4"	11,2	0,44	13,2	0,52	225	3260	900	13050	100	3,94	220	0,15
H02004008	8	-5	5/16"	12,8	0,50	14,8	0,58	215	3110	850	12320	114	4,49	270	0,18
H02004010	10	-6	3/8"	15,1	0,59	17,1	0,67	180	2610	720	10440	127	5,00	340	0,23
H02004012	12	-8	1/2"	18,1	0,71	20,1	0,79	160	2320	640	9280	178	7,01	410	0,27
H01006016	16	-10	5/8"	21,3	0,84	23,3	0,92	130	1880	520	7540	200	7,87	510	0,34
H01006019	19	-12	3/4"	25,3	1,00	27,3	1,07	105	1520	420	6090	240	9,45	620	0,42
H01006025	25	-16	1"	33,1	1,30	35,1	1,38	88	1270	350	5070	300	11,81	930	0,62
H01006032	31	-20	1.1/4"	40,6	1,60	43,3	1,70	63	910	250	3620	419	16,50	1250	0,84
H01006040	38	-24	1.1/2"	47,0	1,85	49,7	1,96	50	720	200	2900	500	19,69	1600	1,07
H01006051	51	-32	2"	60,4	2,38	63,1	2,48	40	580	160	2320	630	24,80	2200	1,47
H01006060	60	-38	2.3/8"	68,8	2,71	71,5	2,81	50	720	200	2900	650	25,59	2245	1,50

# TRACTOR®/2T



## MAIN APPLICATIONS

Medium-high pressure lines

## CONTINUOUS SERVICE TEMPERATURE RANGE

-40°C / +100°C

-40°F / +212°F

## MAX OPERATING TEMPERATURE

121°C / 250°F (intermittent service)

## RECOMMENDED FLUIDS


Mineral oils, vegetable and rape seed oils, glycol and polyglycol based oils, synthetic ester based oils, oils in aqueous emulsion, water

REMARK Halogen-Free hose line

EN 853 2SN

PART. REF.	HOSE SIZE			R.O.D.		O.D.		bar MAX W.P.		BURST PRESSURE		MIN. BEND RADIUS		kg WEIGHT	
	DN	dash	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	g/m	lb/ft
H01027005	5	-3	3/16"	11,3	0,44	13,3	0,52	415	6010	1650	23920	89	3,50	315	0,21
H01027006	6	-4	1/4"	12,7	0,50	14,7	0,58	400	5800	1600	23200	100	3,94	360	0,24
H01027008	8	-5	5/16"	14,3	0,56	16,3	0,64	350	5070	1400	20300	114	4,49	400	0,27
H01027010	10	-6	3/8"	16,7	0,66	18,7	0,74	330	4780	1320	19140	127	5,00	510	0,34
H01027012	12	-8	1/2"	19,8	0,78	21,8	0,86	275	3980	1100	15950	178	7,01	620	0,42
H01027016	16	-10	5/8"	23,0	0,91	25,0	0,98	250	3620	1000	14500	200	7,87	715	0,48
H01027019	19	-12	3/4"	27,0	1,06	29,0	1,14	215	3110	860	12470	240	9,45	955	0,64
H01027025	25	-16	1"	34,8	1,37	36,8	1,45	165	2390	660	9570	300	11,81	1320	0,88
H01027032	31	-20	1.1/4"	44,3	1,74	47,0	1,85	125	1810	500	7250	419	16,50	1965	1,32
H01027040	38	-24	1.1/2"	50,7	2,00	53,4	2,10	90	1300	360	5220	500	19,69	2265	1,52
H01027051	51	-32	2"	63,5	2,50	66,2	2,61	80	1160	320	4640	630	24,80	3115	2,09
H01027060	60	-38	2.3/8"	68,8	2,71	71,5	2,81	90	1300	360	5220	650	25,59	2660	1,78

# GOLDENSPIR®/4SP



## MAIN APPLICATIONS

Very high pressure power lines

## CONTINUOUS SERVICE TEMPERATURE RANGE

-40°C / +100°C

-40°F / +212°F

## MAX OPERATING TEMPERATURE

257°F / 125°C (intermittent service)

## RECOMMENDED FLUIDS

Mineral oils, vegetable oils and synthetic ester based oils (up to 212°F / 100°C), glycols and polyglycols, mineral oils in aqueous emulsion, water

REMARK Halogen-Free hose line

EN 856 4SP

PART. REF.	HOSE SIZE			R.O.D.		O.D.		bar MAX W.P.		BURST PRESSURE		MIN. BEND RADIUS		kg WEIGHT	
	DN	dash	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	g/m	lb/ft
H10009006	6	-4	1/4"	14,7	0,58	17,6	0,69	485	7030	2400	34800	100	3,94	605	0,41
H10009010	10	-6	3/8"	17,6	0,69	21,1	0,83	450	6520	2000	29005	110	4,33	770	0,52
H10009012	12	-8	1/2"	20,3	0,80	24,3	0,96	420	6090	1750	25370	120	4,72	925	0,62
H10009016	16	-10	5/8"	23,7	0,93	27,9	1,10	380	5510	1600	23200	140	5,51	1145	0,77
H10009019	19	-12	3/4"	28,2	1,11	31,9	1,26	380	5510	1600	23200	170	6,69	1510	1,01
H10009025	25	-16	1"	35,0	1,38	39,0	1,54	320	4640	1400	20300	340	13,39	1970	1,32

## MAIN APPLICATIONS

Very high pressure power lines

## CONTINUOUS SERVICE TEMPERATURE RANGE

-40°C / +100°C

-40°F / +212°F

## MAX OPERATING TEMPERATURE

125°C / 257°F (intermittent service)

## RECOMMENDED FLUIDS

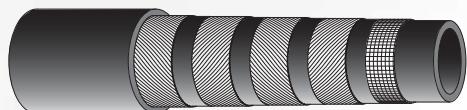
Mineral oils, vegetable oils and synthetic ester based oils (up to 212°F / 100°C), glycols and polyglycols, mineral oils in aqueous emulsion, water

EN 856 4SH

PART. REF.	HOSE SIZE			R.O.D.		O.D.		bar MAX W.P.		BURST PRESSURE		MIN. BEND RADIUS		kg WEIGHT	
	DN	dash	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	g/m	lb/ft
H10040019	19	-12	3/4"	28,2	1,11	31,9	1,26	420	6090	1750	25370	210	8,27	1520	1,02
H10040025	25	-16	1"	35,1	1,38	38,1	1,50	385	5580	1750	25370	220	8,66	2070	1,39
H10040032	31	-20	1.1/4"	42,2	1,66	45,0	1,77	350	5070	1400	20300	420	16,50	2450	1,65
H10040040	38	-24	1.1/2"	49,1	1,93	53,1	2,09	300	4350	1250	18120	560	22,05	3200	2,15
H10040051	51	-32	2"	63,5	2,50	67,5	2,66	250	3620	1000	14500	700	27,56	4500	3,02

# ROCKMASTER®/13

## ABRASION, WEATHER & HEAT RESISTANCE



**MAIN APPLICATIONS**  
Heavy duty power lines, hydrostatic transmissions, in heavy duty environmental conditions, specific installations with severe abrasion conditions, marine applications, underground and open pit mining

**CONTINUOUS SERVICE TEMPERATURE RANGE**  
-40°C / +121°C -40°F / +250°F


**MAX OPERATING TEMPERATURE**  
+125°C / +257°F (intermittent service)

**RECOMMENDED FLUIDS**  
Mineral oils, vegetable oils and synthetic ester based oils (up to 212°F / 100°C), glycols and polyglycols, mineral oils in aqueous emulsion, water

PART. REF.	HOSE SIZE			R.O.D.		O.D.		bar MAX W.P.		BURST PRESSURE		MIN. BEND RADIUS		kg WEIGHT	
	DN	dash	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	g/m	lb/ft
<b>H10035A06</b>	6	-4	1/4"	14,6	0,57	17,6	0,69	690	10000	3250	47120	120	4,72	645	0,43
<b>H10035A10</b>	10	-6	3/8"	17,4	0,69	20,4	0,80	690	10000	2900	42050	150	5,98	815	0,55
<b>H10035A12</b>	12	-8	1/2"	21,5	0,85	24,5	0,96	620	8990	2500	36250	200	7,99	1125	0,75
<b>H10035019</b>	19	-12	3/4"	29,0	1,14	31,8	1,25	350	5070	1950	28270	240	9,45	1620	1,09
<b>H10035025</b>	25	-16	1"	36,0	1,42	39,2	1,54	350	5070	1650	23920	300	11,81	2195	1,47
<b>H10035032</b>	31	-20	1.1/4"	47,0	1,85	50,0	1,97	350	5070	1500	21750	420	16,54	3600	2,42
<b>H10035040</b>	38	-24	1.1/2"	54,6	2,15	57,5	2,26	350	5070	1600	23200	500	19,69	4720	3,17
<b>H10035051</b>	51	-32	2"	68,4	2,69	72,0	2,83	350	5070	1500	21750	630	24,80	6825	4,57

# ROCKMASTER®/15
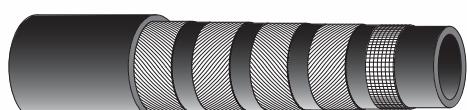
## ABRASION, WEATHER & HEAT RESISTANCE



**MAIN APPLICATIONS**  
Heavy duty power lines, hydrostatic transmissions, in heavy duty environmental conditions, specific installations with severe abrasion conditions, marine applications, underground and open pit mining

**CONTINUOUS SERVICE TEMPERATURE RANGE**  
-40°F / +250°F -40°C / +121°C

**MAX OPERATING TEMPERATURE**  
+125°C / +257°F (intermittent service)

PART. REF.	HOSE SIZE			R.O.D.		O.D.		bar MAX W.P.		BURST PRESSURE		MIN. BEND RADIUS		kg WEIGHT	
	DN	dash	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	g/m	lb/ft
<b>H10049019</b>	19	-12	3/4"	28,2	1,11	31,0	1,22	420	6090	1750	25370	265	10,43	1430	0,96
<b>H10049025</b>	25	-16	1"	35,1	1,38	38,1	1,50	420	6090	1750	25370	267	10,51	2040	1,37
<b>H10049A32</b>	31	-20	1.1/4"	46,3	1,82	49,5	1,95	420	6090	1680	24360	267	10,51	3670	2,46
<b>H10049040</b>	38	-24	1.1/2"	54,6	2,15	57,5	2,26	420	6090	1680	24360	315	12,40	4720	3,17






**RECOMMENDED FLUIDS**  
Mineral oils, vegetable oils and synthetic ester based oils (up to 212°F / 100°C), glycols and polyglycols, mineral oils in aqueous emulsion, water

# FERRULE

**Application:** One Wire Braid Hose, Two Wire Braid Hose and Wire Spiral Hose

**Material:** Made from High Quality Carbon Steel, Chrome Finishing that passed Salt Water Spray Test

**Size Range (inch):** 1/4 to 2









Hose Type	1SN	2SN	4SP/4SH	4SH	4SP/4SH	R13/R15	THERMOPLASTIC/R8	PTFE
<b>Ferrule</b>								
<b>Part No.</b>	00110-A	03310	00400	00401	00402	00621	00018	00TF0












# FITTING

**Application:** Low and High Pressure

**Material:** Made from High Quality Carbon Steel, Chrome Finishing that passed Salt Water Spray Test

**Size Range (inch):** 1/4 to 2

<b>24° Cone O-Ring Seal L.T.</b>				<b>24° Cone O-Ring Seal H.T.</b>			
							
10411, 10412	20411, 20412	20441, 20442	20491, 20492	10511, 10512	20511, 20512	20541, 20542	20591, 20592
<b>BSPT</b>	<b>BSP Multiseal</b>			<b>BSP 60° Cone Seal</b>			
							
13011-SP 13012-SP	22111, 22112	22141, 22142	22191, 22192	22611, 22612	22641, 22642	22691, 22692	
<b>NPT</b>	<b>JIC 74° Cone Seal</b>				<b>ORFS Flat Seal</b>		
							
15611, 15612	16711, 16712	26711, 26712	26741, 26742	26791, 26792	14211, 14212	24211, 24212	

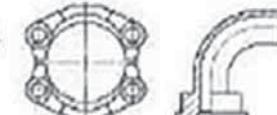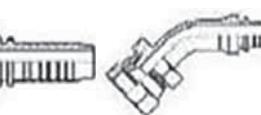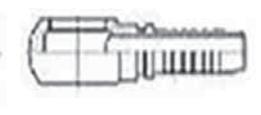ORFS Flat Seal	SAE Flange L.T.				SAE Flange		
 24241, 24242	 87311, 87312	 87341, 87342	 FL	 87391, 87392	 87613		
SAE Flange H.T.		Metric 60° Cone Seal					
 87611, 87612	 87641, 87642	 87691, 87692	 FS	 28611, 28612	 28641, 28642	 28691, 28692	 87643
GAS 60° Cone Seal		Banjo					
 29611, 29612	 29641, 29642	 29691, 29692	 700M	 72011, 72012	 720B	 70011, 70012	

# ADAPTOR

**Application :** Low and High Pressure

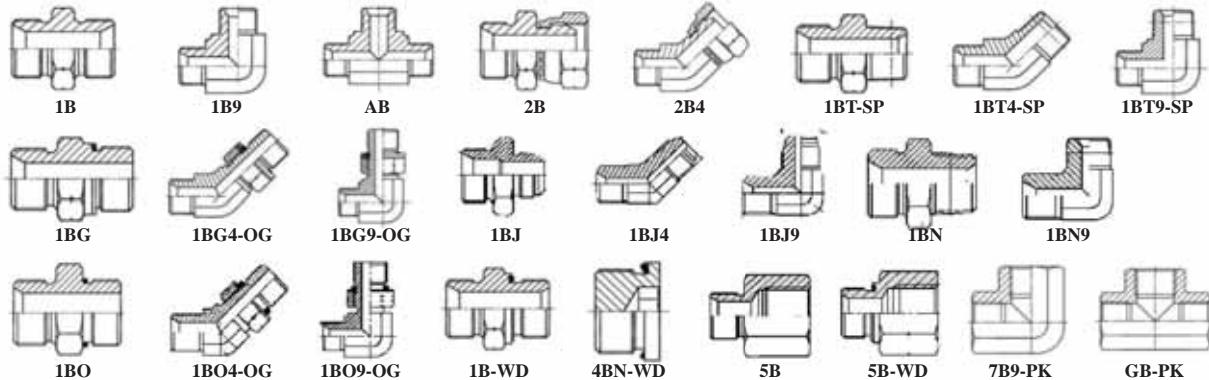
**Material :** Made from High Quality Carbon Steel, Chrome Finishing that passed Salt Water Spray Test

**Size Variation :**  $\frac{1}{4}$  to 2


## Japanese BSP Thread 60° Cone Fittings




## BSP Thread 60° Cone Fittings




## BSPT Thread Fittings

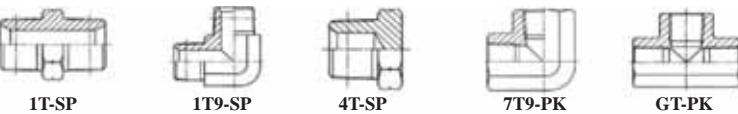

## NPT Thread Fittings

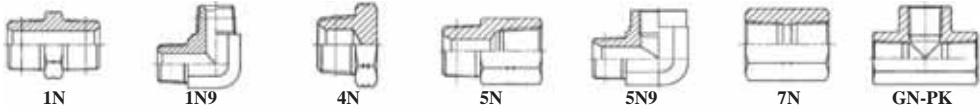

## JIC 74° Cone Flared Tube Fittings

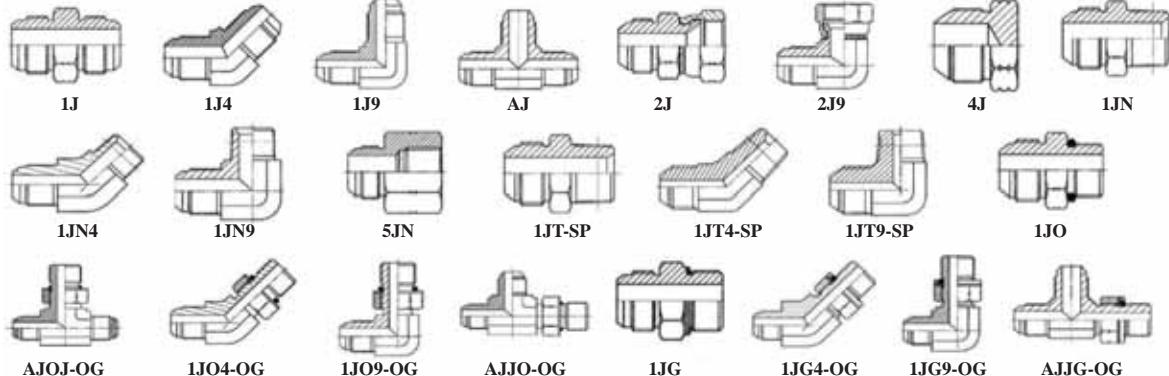

# INDUSTRIAL PRODUCTS

Chemical Suction / Discharge Hose	Air / Water Hose 300psi	Air / Water Hose 600psi
		
Water Suction / Discharge Hose 150psi	Food & Beverage Delivery Hose 150psi	Beverage Suction / Discharge Hose 150psi
		
Radiator / Hot Water Hose 150psi	Steam Hose 250psi	Cement Delivery Hose 150psi
		
Steel Concrete Hose 750psi	Cement Suction Hose 150psi	Sand Blasting Hose
		
Heavy Duty Oil Suction / Discharge Dock Hose	Multiserviz Hose 300psi	Oil Delivery Hose 150psi
		
Oil Suction / Discharge Hose 150psi	Oil Suction / Discharge Hose 250psi	Stainless Steel Flexible Metal Hose
		
Industrial Camlock (Aluminium - Brass - SS316)		Storz Coupling
		
		King Nipple
		

# IRON CASTING COUPLING

Suction Hose Coupling



Sand Blasting Hose Coupling



Claw Coupling



Ground Joint Coupling



# CLAMPS

Interlock Clamp



Pipe Clamp



Double Bolt Clamp

Superior Clamp

Handle Pipe Clamp



**CV. Jaya Maju Mandiri** start-up in 2008 to handle site-services in Mining Industries. We Import and keep stock for various Hoses, Connectors and other related parts for Hydraulic & Industrial Products.



LEAN warehouse system is running in our facility to ensure the efficiency in locating products for Quick Stock Check and Goods Delivery

**We Lead Our Team as We Lead Our Family (TEAM = FAMILY)**

This Moto helps our company grow, as every employee care and support each other to establish good working environment.

We prioritized every customer to reach their satisfaction for any enquiries and on time delivery.



Inventory



Teamwork

**CV. Jaya Maju Mandiri** always put Quality Satisfaction at the Top Concern. Various assembly Equipments are used to assembly hoses that perfectly match your specific requirements. Standard Hose Assembly Application applied to every assembly in our facility to maintain Quality Products. Hose Test Bench Machine is also applicable for every hose assembly to ensure our products are in good quality before it goes out from our facility.

The Vision that drives us to the future is to be recognized by our customer; hence we always value customers and make every customer in priority list to improve and expand its business.

Our only Mission is to Reach Customer Satisfaction by Providing the Right Quality Products at the Right Time.



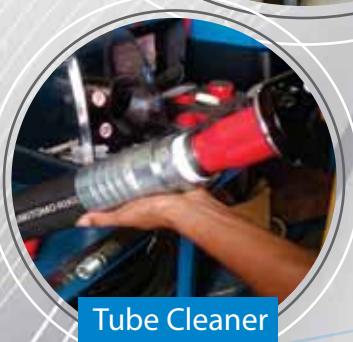
Assembly Equipment



Finn-Power Skiver Machine



Finn-Power 32MS



Tube Cleaner



Test Bench

**CV. Jaya Maju Mandiri**  
Epicentrum Walk Suite A529  
Rasuna Said, Karet Kuningan,  
Jakarta Selatan, 12940  
Phone: (021) 29420515  
Email : [cv.jayamajumandiri.supplier.com](mailto:cv.jayamajumandiri.supplier.com)  
Website: [www.supplierselanghidrolik.com](http://www.supplierselanghidrolik.com)