
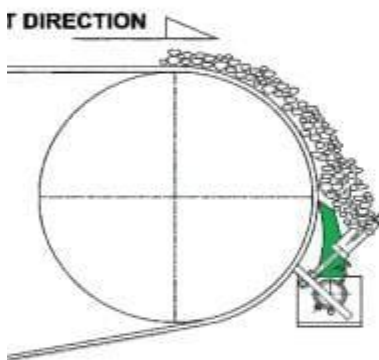


Construction

- ❖ Segmented molded Polyurethane Blade.
- ❖ Frame aluminum bar cast and Base frame from Pipe.
- ❖ Adjustable spring tension turret for simple adjustable
- ❖ Blade tension, site gauge gives confirmation of optimal

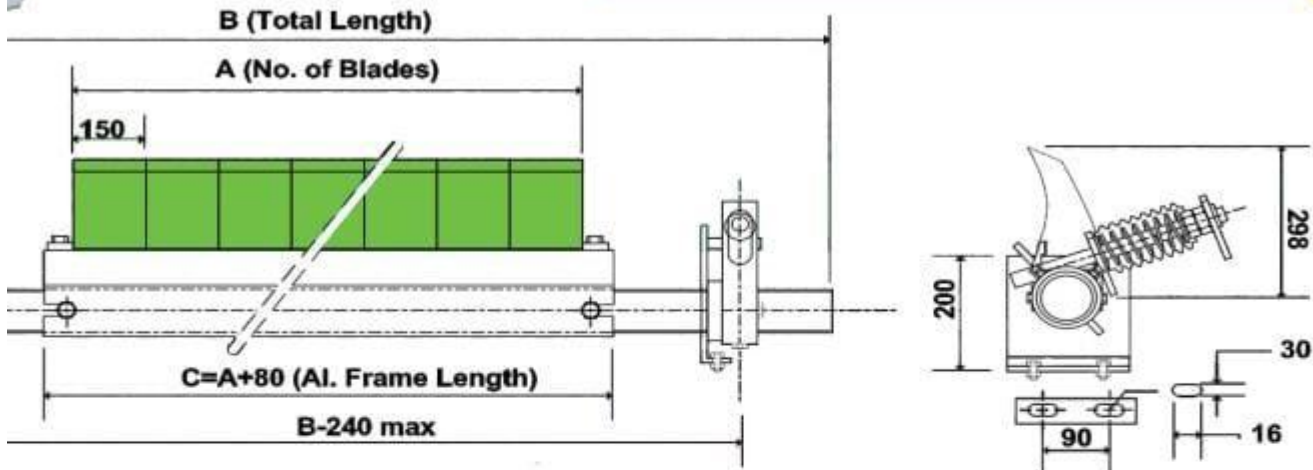

❖ Light Duty

Model	Belt Width	A	B	C	N
HPC-45-PU	450	300	1450	380	2
HPC-50-PU	500	450	1500	530	3
HPC-60-PU	600	450	1600	530	3
HPC-65-PU	650	450	1650	530	3
HPC-75-PU	750	600	1750	680	4
HPC-80-PU	800	600	1800	680	4
HPC-90-PU	900	750	1900	830	5
HPC-100-PU	1000	900	1900	980	6
HPC-105-PU	1050	900	2050	980	6
HPC-120-PU	1200	1050	2200	1130	7

❖ Heavy Duty

HEAVY DUTY	Belt Width	A	B	C	N
HPC-140-PU	1400	1200	2400	1280	8
HPC-150-PU	1500	1350	2500	1430	9
HPC-160-PU	1600	1350	2600	1430	9
HPC-180PU	1800	1500	2800	1580	10
HPC-200-PU	2000	1650	3000	1730	11
HPC-220-PU	2200	1800	3200	1880	12
HPC-240-PU	2400	2100	3400	2180	14
HPC-260-PU	2600	2250	3600	2330	15

All Dimension in millimeter

fits

urethane blade provides efficient, e cleaning. Design help prevent buildup.

e cleans at the most efficient point onveyor – the belt head section.

easy two bolt, slide out blade ent saves time and money.

I specifically for harsh applications, ed design can succeed where other fail. When used with a Geroll heavy ondry cleaner, excellent belt is obtained.