



LAMPU PJU

(ALL IN ONE **60 WATT**)

SPECIFICATION

PV MODULE

Model	60 Watt/155Wp
Type	Monocrystalline
Max Power	18V - 155Wp
Efficiency	> 20%
Standard Test	B2TE SNI 04-3850.2-1995
Lifetime	25 Years
Certification	ISO 9001, ISO 14001, OHSAS 18001

BATTERY

Merk	SANKELUX
Type	Lithium FePo4
Capacity	12,6V - 40 Ah
Standard Test	SNI IEC - 60598-2-3:2016
Cycle Battery	> 2000
Charging Time	8 > 12 Hours
Working Mode	Light Control Time Control
Warranty	3 Years

LED LAMP

LED Chip	1x28 Pcs 5050 LED High Power
Max Power	60 Watt
Lumens	> 8400
Lifetime	> 100.000 Hours
Color Temperature	5000-6000 K
Headlight Lens	Optical Grade Acrylic Prism
Standard Test	LIPI
Time Control	5 Stage
PIR Motion Sensor	Move Sensor & Auto Dimmer
Casing Armature	Alluminium Alloy
Mounting Bracket	Steel Powder Coating
Dimension	1635 x 494 x 49 mm
Weight	22 Kg
Certification	ISO 9001, ISO 14001, OHSAS 18001
Warranty	3 years
Standard Packing	Carton Box, Foam & Bubble
TKDN	41,66 %
SNI	SNI IEC 60598-2-3:2016



Motion Sensor
Fiture



Water
Resistance



Free Bills
Electricity



Easy
Installation

PT. SANKEINDO

Jl. Pahlawan Seribu Komp. Golden Boulevard
Blok.H2 No 43-46 BSD City, Tangerang, 15322
P: 02153161139 E: sales@sankeindo.co.id



PT. SANKEINDO

SANKELUX
Solar Energy & Lighting

PJU LED

SANKELUX PSMLED 11011

30 - 80 AC

Lampu PJU SANKELUX adalah lampu LED (Light Emiting Diode) lampu ini berteknologi modern, dan di rakit di Indonesia serta sudah banyak digunakan oleh Instansi Pemerintah maupun Swasta. Dapat Menghemat daya listrik 40%, memiliki usia pakai hingga 50.000 Jam. Menggunakan Bahan Diecast Aluminium High Corrosion Resistance, dengan tingkat penerangan (Lumes) yang tinggi, serta sudut penyinaran yang adjustable.

Lampu PJU Sankelux telah memiliki TDKN >40%. serta Sertifikat SNI IEC 60598-2-3:2016, ISO 9001:2015, ISO 14001: 2015, dan OHSAS 18001: 2007.

5
YEAR
WARRANTY

SNI



IAS



OHS



**Kementerian
Perindustrian
REPUBLIK INDONESIA**

SPECIFICATION

Deskripsi	30 Watt	40 Watt	60 Watt	80 Watt
Tegangan AC (V)	220 V			
Daya (W)	30 Watt	40 Watt	60 Watt	80 Watt
Suhu Warna (K)	4000 / >5000			
IP (Ingress Protection)	66			
Kuat Cahaya (Lumens)	4200	5600	8400	11200
Efikasi (Lumen/Watt)	140			
Umur Teknis Lampu	>100.000 Jam			
Temperatur Kerja	-5 °C s/d 60 °C			
Proteksi	Surge DM:6KV CM:10KV, Short Circuit Protection			
Material Lampu	Diecast Alluminium High Corrosion Resistance			
Dimensi	520 x 210 x 70 mm			



**Easy
Installment**



Efficient



Durability





SOLAR ROOF TOP

SOLUSI LISTRIK TENAGA SURYA UNTUK BANGUNAN GEDUNG DAN PERUMAHAN

SANKELUX menghadirkan inovasi dan solusi listrik tenaga surya yang dipasang diatas bangunan gedung dan rumah untuk menghasilkan energi bersih. **SANKELUX** memiliki desain untuk on-grid, off-grid, hybrid, dan power back up system. dilengkapi system monitoring produksi energi.



SYSTEM KONEKSI

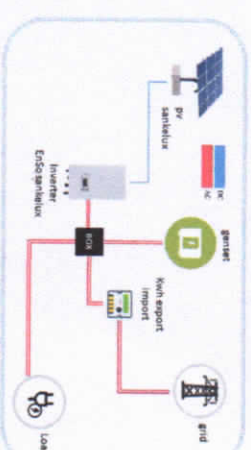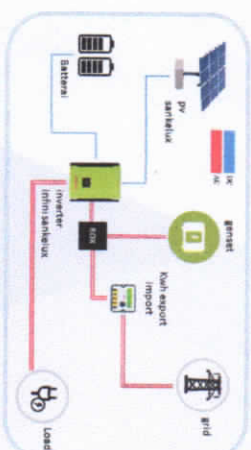

ON-GRID - HYBRID CONNECTION (POWER BACK UP)

ON-GRID CONNECTION

APLIKASI



BUILDING ROOF TOP

RESIDENTIAL ROOF TOP

PARKING SPACE

OPEN SPACE


TEMPORARY OFFICE

PRODUKSI ENERGY*

Bulan	GD Rumpi KWh/m ² /day	GD Rumpi KWh/m ² /day	System output KWh/m ² /day	System output KWh/m ² /day
Januari	4,24	3,22	307,3	8,538
Februari	4,24	3,22	307,3	8,538
Maret	4,24	3,22	307,3	8,538
April	4,24	3,22	307,3	8,538
Mai	4,24	3,22	307,3	8,538
Juni	4,24	3,22	307,3	8,538
Juli	4,24	3,22	307,3	8,538
Agustus	4,24	3,22	307,3	8,538
September	4,24	3,22	307,3	8,538
Oktober	4,24	3,22	307,3	8,538
November	4,24	3,22	307,3	8,538
Desember	4,24	3,22	307,3	8,538
Year	4,76	4,70	395,0	145,617

ILUSTRASI KAPASITAS SOLAR ROOFTOP DENGAN PEROLEHAN ENERGI DAN LUAS AREA

Kapasitas (Kwsp)	Produksi Energi / Tmn (kwh)	Luas (m ²)
5	7,281	35
10	14,562	70
20	29,123	140
30	43,685	210
50	72,808	350
80	116,494	560
100	145,617	700
200	291,234	1,400
300	436,851	2,100
400	582,468	2,800



* Ilustrasi 100 KWP di JABODETABEK