



110, Seunggicheon-ro Namdong-gu, Incheon, Korea
Tel : 82.32.812.6257 Fax : 82. 32.232.3131
E-mail : info@dukshin.com
www.dukshin.com



Website



YouTube

Professional Pumping Systems

DUKSHIN COPORATION



+

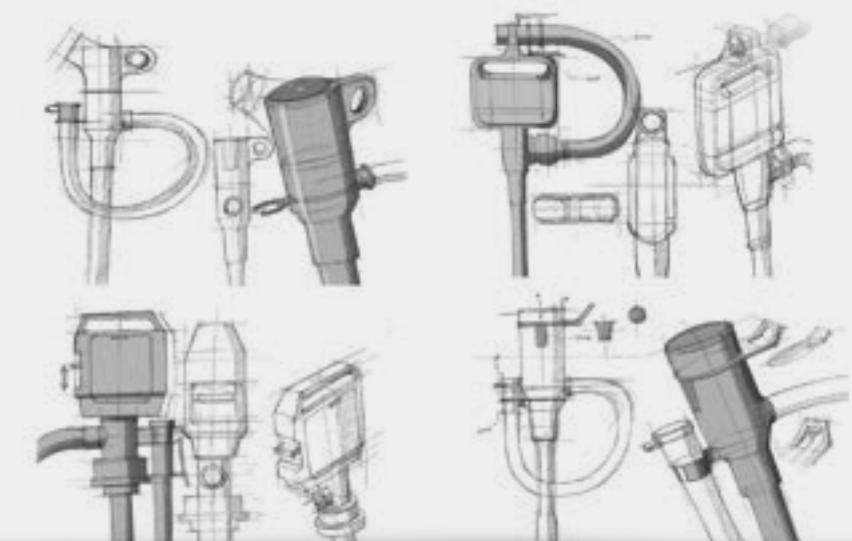
Professional Pumping Systems

Superior Quality



ABOUT US

Since the establishment in 1988, Dukshin Corp., Ltd. has been a leading manufacturer of liquid transfer pumps. We specialize in supplying reliable and high-quality products through rigorous research, development, and strict quality control. With decades of expertise and a commitment to excellence, Dukshin Corp., Ltd. is your trusted partner for competitive pumping solutions.



CONTACT US

Dukshin Corp., Ltd.

Head Office & Plant

110, Seunggicheon-ro Namdong-gu,
Incheon, Korea

Tel 82.32.812.6257

Fax 82.32.232.3131

E-mail info@dukshin.com

www.dukshin.com



Website



YouTube

EXPORT STATUS



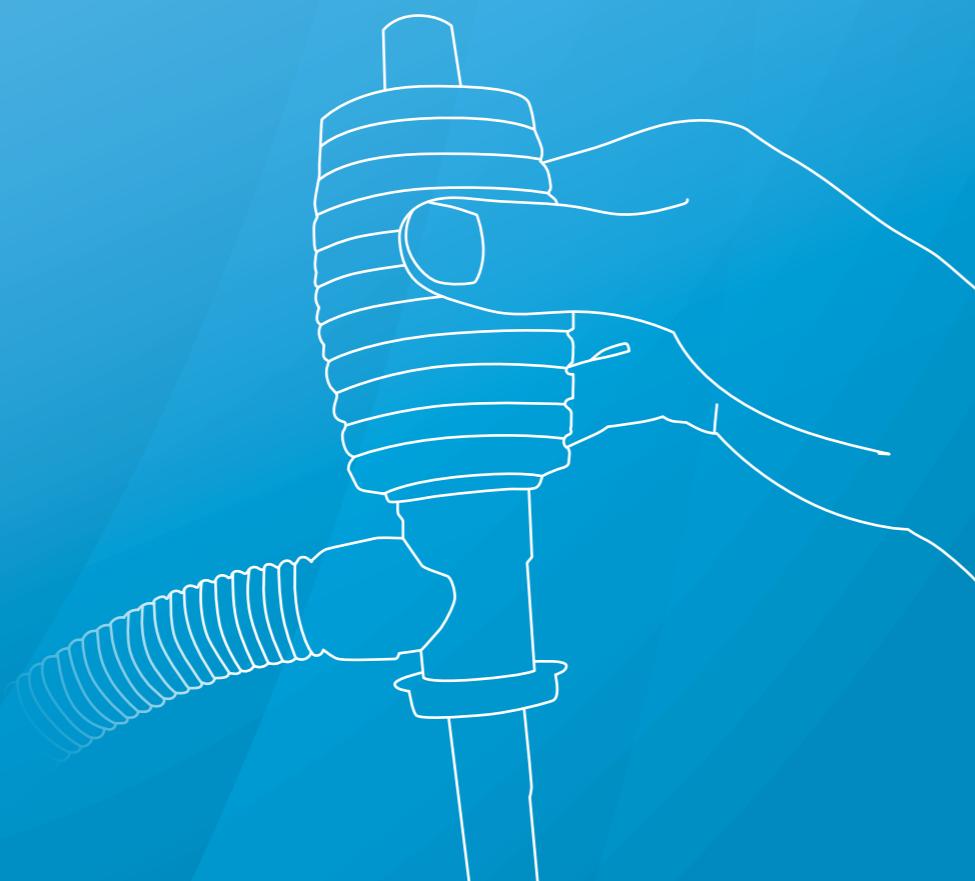
CERTIFICATIONS



MADE IN KOREA

LIGHT DUTY DUTY MANUAL PUMP

DP-14
DP-14S
DP-15
DP-16-1N
DP-40
DP-45
DP-50



LIGHT DUTY MANUAL PUMP

DP-14 Siphon Hand Pump



7LPM

Features & Applications

- Mechanism : Manual squeezing
- Applicable liquids : Kerosene, diesel, gasoline, non-potable water, deodorants, antifreeze, windshield washer fluid, thinner, toluene, chemical insecticides, agricultural chemicals
- Non-corrosive, non-toxic plastic material construction



Specifications

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diamete | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|------------------------------|---------------------|-----------------|---------------|---------------|
| 530mm | 385mm | 15mm | 540mm | 12mm | 51mm | 7LPM | PE | 64g |

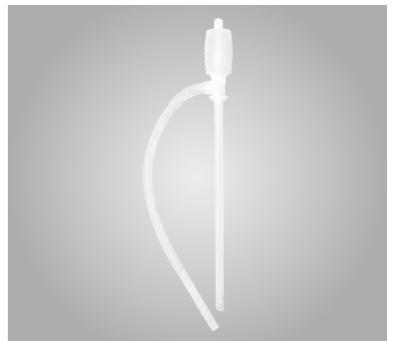
DP-14S Chemical Siphon Hand Pump



7LPM

Features & Applications

- Mechanism : Manual squeezing
- Applicable liquids : Thinner, toluene, hydrochloric acid 35%, nitric acid 35%, sulfuric acid 35%, acetic acid 35%, water, gasoline, diesel, kerosene, brake cleaner, windshield washer fluid, chemical insecticides, agricultural chemicals
- Non-corrosive, non-toxic plastic material constructed



Specifications

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diamete | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|------------------------------|---------------------|-----------------|---------------|---------------|
| 530mm | 385mm | 15mm | 540mm | 12mm | 51mm | 7LPM | PE | 68g |

DP-15 Siphon Hand Pump (High Speed)



12LPM

Features & Applications

- Mechanism : Manual squeezing
- Convenient one-touch button to break siphon flow
- Applicable liquids : Kerosene, diesel, gasoline, non-potable water, antifreeze, deodorants, windshield washer fluid, chemical insecticides, agricultural chemicals
- Non-corrosive, non-toxic plastic material construction



Specifications

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diamete | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|------------------------------|---------------------|-----------------|---------------|---------------|
| 610mm | 425mm | 25mm | 660mm | 19mm | 60mm | 12LPM | PE | 147g |

DP-16-1N Siphon Hand Pump (Fixable & High Speed)



12LPM

Features & Applications

- Mechanism : Manual up and down piston
- Applicable supply tank height : 300mm ~ 390mm
- Applicable liquids: Kerosene, diesel, gasoline, non-potable water, deodorants, antifreeze, windshield washer fluid, thinner, toluene, chemical insecticides, agricultural chemicals, motor oil(ex.5W30), hydraulic oil(ex.AW46), lubricants
- Non-corrosive, non-toxic plastic material construction

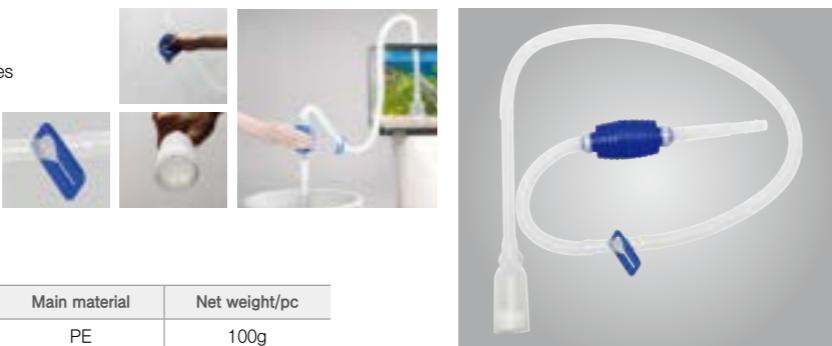


Specifications

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diamete | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|------------------------------|---------------------|-----------------|---------------|---------------|
| 650mm | 425mm | 25mm | 660mm | 19mm | 60mm | 12LPM | PE | 150g |

LIGHT DUTY MANUAL PUMP**DP-40** Aquarium Cleaner Pump (Big Type) Manual 5.5LPM**Features & Applications**

- Mechanism : Manual squeezing
- Ideal for use when replacing water in aquarium without damage to fishes
- Unique filter allows dirt in sand to be discharged along with water
- Automatic flowing by siphon action
- All non-toxic plastic material constructed

**Specifications**

| Delivery volume | Total length | Suction tube outer diameter | Main material | Net weight/pc |
|-----------------|--------------|-----------------------------|---------------|---------------|
| 5.5LPM | 1,542mm | 43.5mm | PE | 100g |

DP-45 Aquarium Cleaner Pump (Small Type) Manual 4LPM**Features & Applications**

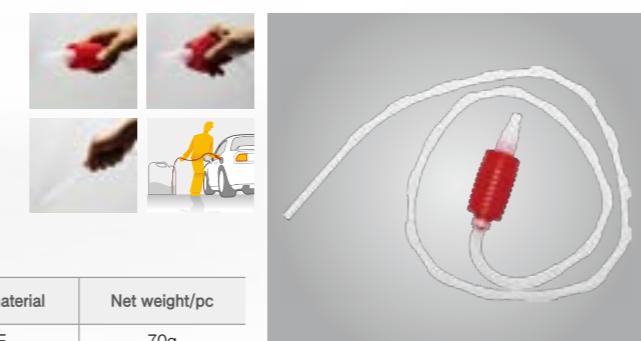
- Mechanism : Manual squeezing
- Ideal for use when replacing water in aquarium without damage to fishes
- Unique filter allows dirt in sand to be discharged along with water
- Automatic flowing by siphon action
- All non-toxic plastic material constructed

**Specifications**

| Delivery volume | Total length | Suction tube outer diameter | Main material | Net weight/pc |
|-----------------|--------------|-----------------------------|---------------|---------------|
| 4LPM | 1,461mm | 18mm | PE | 68g |

DP-50 Siphon Hand Pump (with Long Hose) Manual 4LPM**Features & Applications**

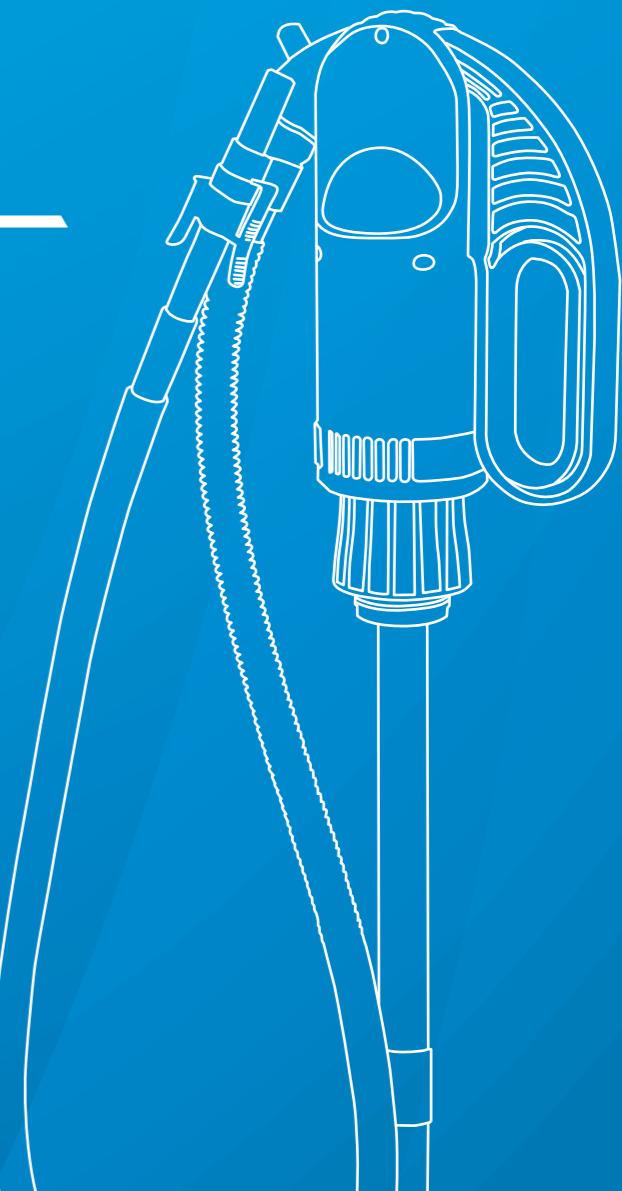
- Mechanism: Manual squeezing
- Applicable liquids: Kerosene, diesel, gasoline, non-potable water, Deodorants, antifreeze, windshield washer fluid, thinner, toluene, chemical insecticides, agricultural chemicals
- Non-corrosive, non-toxic plastic material construction

**Specifications**

| Total length | Suction tube outer diameter | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|-----------------------------|---------------------|-----------------|---------------|---------------|
| 1,788mm | 13mm | 46mm | 4LPM | PE | 70g |

HEAVY DUTY MANUAL PUMP

DP-20
DP-25
TI-901
TI-901S
TI-901N
DLP-2105S
DLP-2105H
DLP-2105N



HEAVY DUTY MANUAL PUMP**DP-20** Siphon Hand Pump for Drum Can**Features & Applications**

- Mechanism : Manual up and down piston
- Applicable liquids: Kerosene, diesel, gasoline, non-potable water, deodorants, antifreeze, windshield washer fluid, thinner, toluene, chemical insecticides, agricultural chemicals, motor oil(ex.5W30), hydraulic oil(ex.AW46), lubricants
- Non-corrosive, non-toxic plastic material construction, light-weight
- 30mm long adapter for standard 2" NPS drum bung

**Specifications**

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------------|-----------------|---------------|---------------|
| 1,125mm | 875mm | 22mm | 1,200mm | 22mm | 71mm | 17.5LPM | PE | 300g |

DP-25 Siphon Hand Pump for Drum Can (Heavy Duty)**Features & Applications**

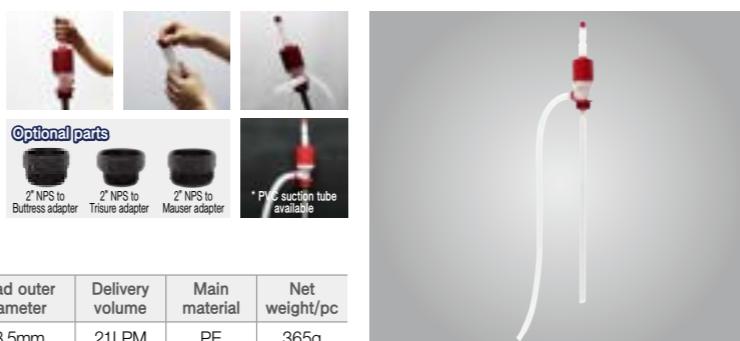
- Mechanism : Manual up and down piston
- Applicable liquids: Kerosene, diesel, gasoline, non-potable water, deodorants, antifreeze, windshield washer fluid, thinner, toluene, chemical insecticides, agricultural chemicals, motor oil(ex.5W30), hydraulic oil(ex.AW46), lubricants
- Non-corrosive, non-toxic plastic material construction, light-weight
- 30mm long adapter for standard 2" NPS drum bung
- DO NOT use this pump for transferring the following liquids : Acetone, benzene, cresol, nitric acid, butanone, phenol, hydrochloric acid, concentrated caustic soda liquid, sulfuric acid, etc.

**Specifications**

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------------|-----------------|---------------|---------------|
| 1,190mm | 850mm | 25.5mm | 1,200mm | 22.5mm | 85mm | 18.5LPM | PE | 400g |

TI-901 Siphon Hand Pump for Drum Can (Heavy Duty / High Speed)**Features & Applications**

- Mechanism : Manual up and down piston
- Applicable liquids: Kerosene, diesel, gasoline, non-potable water, deodorants, antifreeze, windshield washer fluid, thinner, toluene, chemical insecticides, agricultural chemicals, motor oil(ex.5W30), hydraulic oil(ex.AW46), lubricants
- Non-corrosive, non-toxic plastic material construction, light-weight
- 30mm long adapter for standard 2" NPS drum bung
- DO NOT use this pump for transferring the following liquids : Acetone, benzene, cresol, nitric acid, butanone, phenol, hydrochloric acid, concentrated caustic soda liquid, sulfuric acid, etc.

**Specifications**

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------------|-----------------|---------------|---------------|
| 1,150mm | 850mm | 25.5mm | 1,200mm | 22.5mm | 83.5mm | 21LPM | PE | 365g |

TI-901S Chemical Siphon Hand Pump for Drum Can**Features & Applications**

- Mechanism : Manual up and down piston
- Applicable liquids: Thinner, toluene, hydrochloric acid 35%, nitric acid 35%, sulfuric acid 35%, acetic acid 35%, water, gasoline, diesel, kerosene, brake cleaner, windshield washer fluid, chemical insecticides, agricultural chemicals, motor oil(ex.5W31), hydraulic oil(ex.AW46), lubricants
- Non-corrosive, non-toxic plastic material construction, light-weight
- 30mm long adapter for standard 2" NPS drum bung

**Specifications**

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------------|-----------------|---------------|---------------|
| 1,150mm | 850mm | 25.5mm | 1,200mm | 22.5mm | 83.5mm | 21LPM | PE | 390g |

HEAVY DUTY MANUAL PUMP**TI-901N** Siphon Hand Pump for Drum Can (Segmented Suction Pipe)**Features & Applications**

- Mechanism : Manual up and down piston
- Applicable liquids: Kerosene, diesel, gasoline, non-potable water, deodorants, antifreeze, windshield washer fluid, thinner, toluene, chemical insecticides, agricultural chemicals, motor oil(ex.5W30), hydraulic oil(ex.AW46), lubricants
- Segmented suction pipe for height adjustment and storage
- 30mm long adapter for standard 2" NPS drum bung
- DO NOT use this pump for transferring the following liquids : Acetone, benzene, cresol, nitric acid, butanone, phenol, hydrochloric acid, concentrated caustic soda liquid, sulfuric acid, etc.

**Specifications**

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------------|-----------------|---------------|---------------|
| 1,150mm | 850mm | 25mm | 1,200mm | 22.5mm | 83.5mm | 21LPM | PE | 413g |

DLP-2105S Manual Lever Pump (Spout Type)**Features & Applications**

- Mechanism : Manual up and down lever
- Applicable liquids : motor oil, hydraulic oil, lubricants, DEF(AdBlue), antifreeze, windshield washer fluid, non-potable water, agricultural chemicals
- Non-corrosive, non-toxic plastic material construction, light-weight
- 30mm long adapter for standard 2" NPS drum bung

**Specifications**

| Total length | Suction tube length | Suction tube outer diameter | Spout outer diameter | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|----------------------|---------------------|------------------|----------------|---------------|
| 665~1,300mm | 350~985mm | 20mm | 20.8mm | 255mm | 320ml per stroke | PP, PE, Acetal | 1,080g |

DLP-2105H Manual Lever Pump (Hose Type)**Features & Applications**

- Mechanism : Manual up and down lever
- Applicable liquids : lubricants, Non-potable water, windshield washer fluid, antifreeze, agricultural chemicals, DEF(AdBlue)
- Non-corrosive, non-toxic plastic material construction, light-weight
- 30mm long adapter for standard 2" NPS drum bung

**Specifications**

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------------|------------------|----------------|---------------|
| 665~1,300mm | 350~985mm | 20mm | 2,000mm | 20mm | 280mm | 320ml per stroke | PP, PE, Acetal | 1,200g |

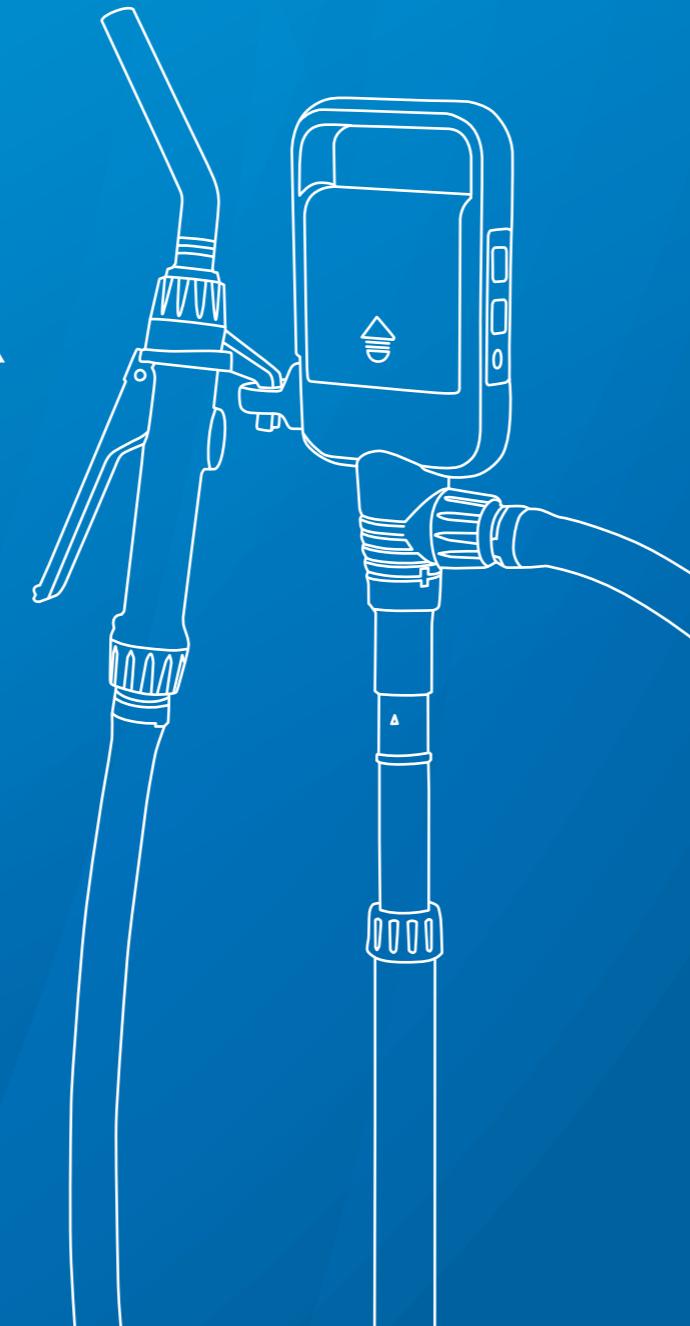
DLP-2105N Manual Lever Pump (Nozzle Type)**Features & Applications**

- Mechanism : Manual up and down lever
- Applicable liquids : DEF(AdBlue), non-potable water, windshield washer fluid, antifreeze, agricultural chemicals, lubricants
- Multi-purpose hose - ISO 22241-2 certified for DEF compatibility
- Comes with a trigger nozzle
- Non-corrosive, non-toxic plastic material construction, light-weight
- 30mm long adapter for standard 2" NPS drum bung

**Specifications**

| Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Head outer diameter | Delivery volume | Main material | Net weight/pc |
|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------------|-----------------|---------------|---------------|
| 665~1,300mm | 350~985mm | 20mm | 2,000mm | 255mm | 320ml per stroke | PP, PE, Acetal | 2,580g | |

LIGHT DUTY ELECTRIC PUMP



DEP-1908A
DEP-1908N
DEP-1504-3V
DEP-1504-12V
DEP-1504RB
DP-101A
DP-101N
DP-03
DP-03-1
DP-03-2
DP-07EA

DP-08EA
DP-08-1EA
DPN-07EA
DP-06CH
DPC-06
DEP-1603-12V
DP-55
DBP-09A
DBP-09N
DBP-15A

LIGHT DUTY ELECTRIC PUMP

DEP-1908A 2xD Battery Operated Pump

Auto Stop 2xD 9LPM

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids: Gasoline, kerosene, diesel, non-potable water
- User-friendly automatic liquid supply
- Auto stop before overflowing by sensor
- Rain proof membrane switch protects against dust and easy to use
- LED is on while pump is running



Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|----------------|----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM (2.4GPM) | PP, PE, Acetal | DC 3V("D"size battery x 2) | 580~720mm | 380~520mm | 32mm | 1,000mm | 14.5mm | 347g |

DEP-1908N 2xD Battery Operated Pump (with Nozzle)

2xD 9LPM

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, diesel, kerosene, DEF(AdBlue), non-potable water, antifreeze, windshield washer fluid, agricultural chemicals
- Comes with a trigger nozzle
- Comes with different nozzle heads
 - Ideal for garden and outdoor use with sprayer head
 - Useful for refilling gas to fuel tanks



Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|----------------|----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM (2.4GPM) | PP, PE, Acetal | DC 3V("D"size battery x 2) | 580~720mm | 380~520mm | 32mm | 1,000mm | 15.9mm | 765g |

DEP-1504-3V 2xD Battery Operated Pump (with Nozzle)

2xD 9LPM

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water, DEF(AdBlue), antifreeze, windshield washer fluid, agricultural chemicals
- Comes with a trigger nozzle
- Comes with different nozzle heads
 - Ideal for garden and outdoor use with sprayer head
 - Useful for refilling gas to fuel tanks
 - Available with suction end filter
 - Ideal for aquarium
 - For boat, plumbing, excess water, etc.



Specifications

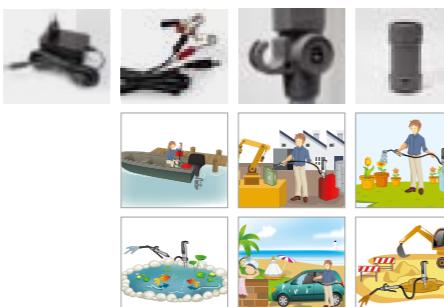
| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|----------------|----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM | PP, PE, Acetal | DC 3V("D"size battery x 2) | 670mm | 467mm | 32mm | 1,000mm | 15.9mm | 337g |

Light Duty Electric Pump

DEP-1504-12V Electric Pump (with Nozzle)

Features & Applications

- Mechanism : Centrifugal motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water, DEF(AdBlue), antifreeze, windshield washer fluid, agricultural chemicals
- Comes with a trigger nozzle
- Use DC 12V car battery or AC power
- Comes with different nozzle heads
 - Ideal for garden and outdoor use with sprayer head
 - Useful for refilling gas to fuel tanks
- Available with suction end filter
- Ideal for aquarium
- For boat, plumbing, excess water, etc.



AC
DC
12V
12LPM

Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Net weight/pc |
|-----------------|----------------|-------|--------------|---------------------|-----------------------------|-----------------------|---------------|
| 12LPM | PP, PE, Acetal | DC12V | 670mm | 467mm | 32mm | 2,500mm | 693g |

DEP-1504RB Rechargeable Battery Pump (with Nozzle)

Features & Applications

- Mechanism : Centrifugal motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water, DEF(AdBlue), antifreeze, windshield washer fluid, agricultural chemicals
- Comes with a trigger nozzle
- USB 2.0 micro type B connector
- Comes with different nozzle heads
 - Ideal for garden and outdoor use with sprayer head
 - Useful for refilling gas to fuel tanks
- Available with suction end filter
- Ideal for aquarium
- For boat, plumbing, excess water, etc.



Li-ION
11.8LPM

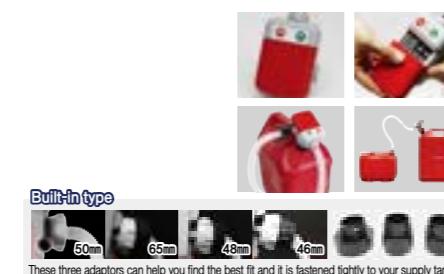
Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Net weight/pc |
|-----------------|----------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|---------------|
| 11.8LPM | PP, PE, Acetal | Rechargeable li-ion battery | 602~742mm | 380~520mm | 32mm | 1,500mm | 483g |

DP-101A 4xAA Battery Operated Pump (Auto Stop & Fixable)

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water
- User-friendly automatic liquid supply
- Auto stop before overflowing by sensor



Auto Stop
4xAA
9LPM

Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|----------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM | PP, PE, Acetal | DC 3V("AA"size battery x 4) | 535mm | 460mm | 32mm | 715mm | 19.5mm | 304g |

Light Duty Electric Pump

DP-101N 4xAA Battery Operated Pump (with Nozzle & Fixable)

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water, DEF(AdBlue), antifreeze, windshield washer fluid, agricultural chemicals
- Use DC 3V with 4xAA Alkaline batteries
- Trigger nozzle
 - More safe : controls the flow at the discharge end with no spill
 - More convenient : flow control by flow switch Nozzle prevents spill while electric S/W in on position



4xAA
9LPM

Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|----------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM | PP, PE, Acetal | DC 3V("AA"size battery x 4) | 535mm | 460mm | 32mm | 1,000mm | 15.9mm | 467g |

DP-03 2xAA Battery Operated Pump

Features & Applications

- Mechanism : Battery operated motor
- Applicable liquids : Gasoline, Kerosene, Diesel, Non-potable water, DEF(AdBlue), Antifreeze, Windshield washer fluid
- User-friendly automatic liquid supply



2xAA
10LPM

Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|---------------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 10LPM | PP, PE, ABS, Acetal | DC 3V("AA"size battery x 2) | 535mm | 385mm | 32mm | 605mm | 14.5mm | 176g |

DP-03-1 2xAA Battery Operated Pump (Auto Stop)

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water
- User-friendly automatic liquid supply
- Auto stop before overflowing by sensor



2xAA
10LPM

Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|---------------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 10LPM | PP, PE, ABS, Acetal | DC 3V("AA"size battery x 2) | 535mm | 385mm | 32mm | 560mm | 19.5mm | 205g |

DP-03-2 2xAA Battery Operated Pump (Auto Stop & Buzzer)

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water
- User-friendly automatic liquid supply
- Auto stop before overflowing by sensor
- Acoustic signal when auto stop



2xAA
Auto Stop
Buzzer
9LPM

Specifications

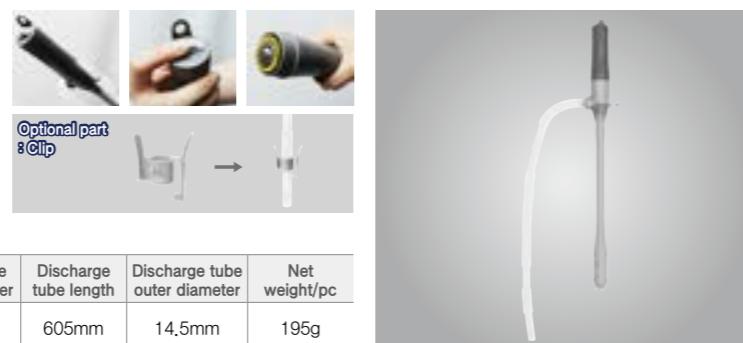
| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|---------------------|----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM | PP, PE, ABS, Acetal | DC 3V("D"size battery x 2) | 592mm | 385mm | 32mm | 560mm | 19.5mm | 223g |

LIGHT DUTY ELECTRIC PUMP**DP-07EA** 2xD Battery Operated Pump (High Speed)

2xD 10LPM

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water, DEF(AdBlue), antifreeze, windshield washer fluid, agricultural chemicals
- User-friendly automatic liquid supply

**Specifications**

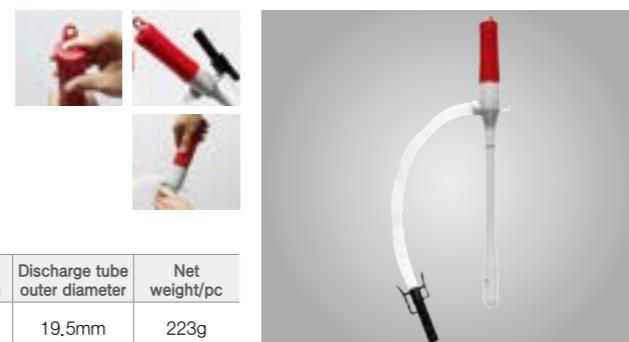
| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|----------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 10LPM | PP, PE, Acetal | DC 3V("D" size battery x 2) | 592mm | 385mm | 32mm | 605mm | 14.5mm | 195g |

DP-08EA 2xD Battery Operated Pump (Auto Stop)

Auto Stop 2xD 9LPM

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water
- User-friendly automatic liquid supply
- Auto stop before overflowing by sensor

**Specifications**

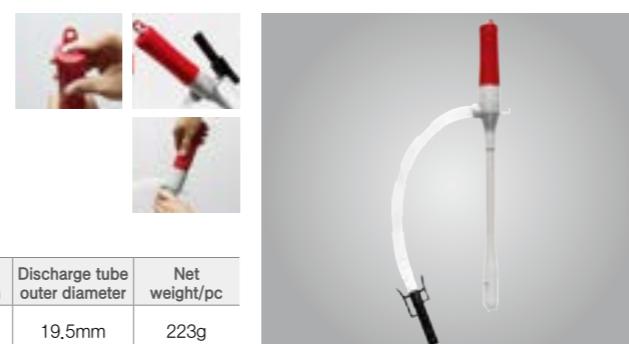
| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|---------------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM | PP, PE, ABS, Acetal | DC 3V("D" size battery x 2) | 592mm | 385mm | 32mm | 560mm | 19.5mm | 223g |

DP-08-1EA 2xD Battery Operated Pump (Auto Stop & Buzzer)

2xD Auto Stop Buzzer 9LPM

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water
- User-friendly automatic liquid supply
- Auto stop before overflowing by sensor
- Acoustic signal when auto stop

**Specifications**

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|---------------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM | PP, PE, ABS, Acetal | DC 3V("D" size battery x 2) | 592mm | 385mm | 32mm | 560mm | 19.5mm | 223g |

DPN-07EA 2xD Battery Operated Pump (with Nozzle)

2xD 9LPM

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water, DEF(AdBlue), antifreeze, windshield washer fluid, agricultural chemicals
- Use DC 3V with 2xD Alkaline batteries
- Pump up to 1,000liters
- Trigger nozzle
- More safe: controls the flow at the discharge end with no spill
- More convenient: flow control by flow switch Nozzle prevents spill while electric S/W in on position

**Specifications**

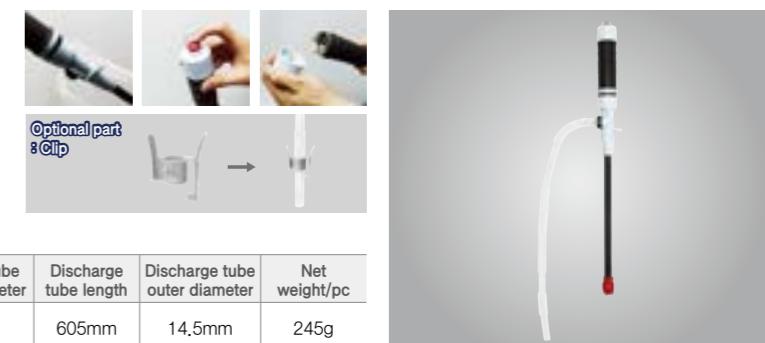
| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|----------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM | PP, PE, Acetal | DC 3V("D" size battery x 2) | 674mm | 467mm | 32mm | 1,000mm | 15.9mm | 335g |

LIGHT DUTY ELECTRIC PUMP**DP-06CH** 2xD Battery Operated Chemical Pump

2xD 7LPM

Features & Applications

- Mechanism : Battery operated motor
- Applicable liquids : Non-potable water, DEF(AdBlue), Windshield washer fluid, Brake cleaner, Methanol, Ethanol
- User-friendly automatic liquid supply

**Specifications**

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|---------------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 7LPM | PP, PE, ABS, Acetal | DC 3V("D" size battery x 2) | 630mm | 375mm | 29mm | 605mm | 14.5mm | 245g |

DPC-06 Dx2 Battery Operated Cooking Oil Pump

2xD 3.5LPM

Features & Applications

- Mechanism : Battery operated motor
- Applicable liquids : Cooking oil
- User-friendly automatic liquid supply
- Effortlessly transfers oil from container to receptacle.
- Filter will ensure no food or other particles will be transferred into receptacle.

**Specifications**

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|----------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 3.5LPM | PP, PE, Acetal | DC 3V("D" size battery x 2) | 660mm | 404mm | 62.5mm | 1,000mm | 14.5mm | 280g |

DEP-1603-12V Electric Submersible Pump (with Nozzle)

AC 12V DC 12V 11LPM

Features & Applications

- Mechanism : Centrifugal motor
- Applicable liquids : Kerosene, diesel, non-potable water, DEF(AdBlue), antifreeze, windshield washer fluid, agricultural chemicals
- Comes with a trigger nozzle
- Comes with different nozzle heads
- Use DC 12V car battery or AC power
- Straight section every 6.5cm to adjust the hose length
- Interchangeable with various kinds of discharge hoses
- Applicable inner diameter : 15mm

**Specifications**

| Delivery volume | Main material | Power | Max lift height | Pump outer diameter | Discharge tube length | Net weight/pc |
|-----------------|----------------|-------|-----------------|---------------------|-----------------------|---------------|
| 11LPM | PP, PE, Acetal | DC12V | 3M | 53.5mm | 3,000mm | 637g |

**DPN-07EA** 2xD Battery Operated Pump (with Nozzle)

2xD 9LPM

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Gasoline, kerosene, diesel, non-potable water, DEF(AdBlue), antifreeze, windshield washer fluid, agricultural chemicals
- Use DC 3V with 2xD Alkaline batteries
- Pump up to 1,000liters
- Trigger nozzle
- More safe: controls the flow at the discharge end with no spill
- More convenient: flow control by flow switch Nozzle prevents spill while electric S/W in on position

**Specifications**

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction tube outer diameter | Discharge tube length | Discharge tube outer diameter | Net weight/pc |
|-----------------|----------------|-----------------------------|--------------|---------------------|-----------------------------|-----------------------|-------------------------------|---------------|
| 9LPM | PP, PE, Acetal | DC 3V("D" size battery x 2) | 674mm | 467mm | 32mm | 1,000mm | 15.9mm | 335g |

DP-55 Submersible DC 12V Pump

12V 17LPM

Features & Applications

- Mechanism : Submersible motor
- Applicable liquids : kerosene, diesel, non-potable water, DEF(AdBlue), antifreeze, windshield washer fluid, agricultural chemicals
- Ideally suitable for on-site diesel refueling of contractors and agricultural plant
- Not to be used with petrol or volatile liquids
- Efficient and easy to clean filter
- 4M cable with battery clips and 3M flexible hose

**Specifications**

| Delivery volume (Power source: car battery) | Max lift height | Pump body length | Pump body diameter | Suction tube length | Stainless pipe outer diameter | Net weight/pc |
|---|-----------------|------------------|--------------------|---------------------|-------------------------------|---------------|
| 17LPM | Approx. 6M | 123mm | 53.5mm | 3,000mm | 15.8mm | 575g |



＼ LIGHT DUTY ELECTRIC PUMP

DBP-09A Submersible Water Pump

A.C. 12LPM

Features & Applications

- Mechanism : Submersible motor
- Applicable liquids : Non-potable water, DEF(AdBlue), antifreeze, kerosene, diesel, windshield washer fluid, agricultural chemicals
- Not to be used with petrol or volatile liquids
- Efficient and easy to clean filter

**Specifications**


| Delivery volume | Max lift height | Pump body length | Pump body diameter | Net weight/pc |
|-----------------------|-----------------------|------------------|--------------------|---------------|
| 15LPM at 0 meter high | 12LPM at 1 meter high | Approx. 4M | 140mm | 70mm |

DBP-09N Submersible Water Pump (with Switch)

A.C. 11LPM

Features & Applications

- Mechanism : Submersible motor
- Applicable liquids : Non-potable water, DEF(AdBlue), Antifreeze, Kerosene, Diesel, Windshield washer fluid, Agricultural chemicals
- Membrane Switch
 - Rain proof membrane switch protects against dust and easy to use
- LED is on while pump is running
- Not to be used with petrol or volatile liquids
- Efficient and Easy to clean filter

**Specifications**

| Delivery volume | Max lift height | Pump body length | Pump body diameter | Net weight/pc |
|-----------------------|-----------------------|------------------|--------------------|---------------|
| 13LPM at 0 meter high | 11LPM at 1 meter high | Approx. 4M | 140mm | 70mm |

DBP-15A Submersible Water Pump (High Speed)

A.C. 18LPM

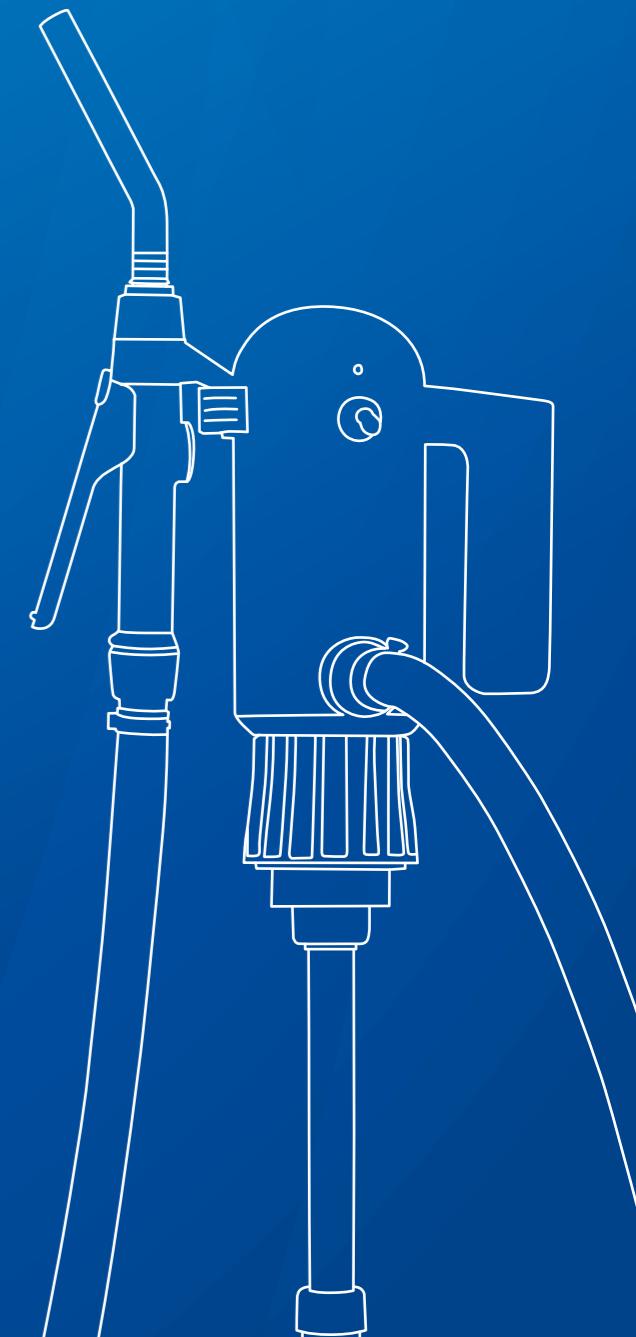
Features & Applications

- Mechanism : Submersible motor
- Applicable liquids : Non-potable water, DEF(AdBlue), antifreeze, kerosene, diesel, windshield washer fluid, agricultural chemicals
- Not to be used with petrol or volatile liquids
- Efficient and easy to clean filter

**Specifications**

| Delivery volume | Max lift height | Pump body length | Pump body diameter | Net weight/pc |
|-----------------------|-----------------------|------------------|--------------------|---------------|
| 22LPM at 0 meter high | 18LPM at 1 meter high | Approx. 4M | 160mm | 77mm |

HEAVY DUTY ELECTRIC PUMP



DEP-1702
DEP-1702RB
DEP-1702P
DEP-1403S
DEP-1403T
DEP-1403-20V
DEP-1403RB

HEAVY DUTY ELECTRIC PUMP**DEP-1702** Electric Drum Pump

A.C. 16LPM LED

Features & Applications

- Mechanism : Centrifugal motor
- Applicable liquids : Gasoline, diesel, DEF(AdBlue), non-potable water, kerosene, antifreeze, windshield washer fluid, agricultural chemicals
- Comes with a trigger nozzle
- Comes with 2" NPS bung adapter
- Optional parts : 2" NPS to 2" Buttress adapter
2" NPS to Trisure adapter
2" NPS to Mauser adapter
- Filter-equipped intake end protects the motor from damage due to alien matters

**Specifications**

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction end outer diameter | Discharge tube length | Net weight/pc |
|-----------------|----------------|-------|--------------|---------------------|----------------------------|-----------------------|---------------|
| 16LPM | PP, PE, Acetal | DC12V | 833~1,123mm | 575~865mm | 38mm | 2,000mm | 2,000g |

DEP-1702RB Rechargeable Battery Drum Pump

Li-ION A.C. 18LPM LED

Features & Applications

- Mechanism : Centrifugal motor
- Applicable liquids : Diesel, DEF(AdBlue), non-potable water, kerosene, antifreeze, windshield washer fluid, agricultural chemicals
- Comes with a trigger nozzle
- Comes with 2" NPS bung adapter
- Optional parts : 2" NPS to 2" Buttress adapter
2" NPS to Trisure adapter
2" NPS to Mauser adapter
- Filter-equipped intake end protects the motor from damage due to alien matters

**Specifications**

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction end outer diameter | Discharge tube length | |
|-----------------|----------------|-----------------------------|--------------|---------------------|----------------------------|-----------------------|--|
| 18LPM | PP, PE, Acetal | Rechargeable Li-ion Battery | 833~1,123mm | 575~865mm | 38mm | 2,000mm | |

DEP-1702P Electric Pail Pump

A.C. 16LPM LED

Features & Applications

- Mechanism : Centrifugal motor
- Applicable liquids : Motor oil(ex.5W30), hydraulic oil(ex.AW46), lubricants, diesel, DEF(AdBlue), non-potable water, kerosene, antifreeze, windshield washer fluid, agricultural chemicals
- Comes with a trigger nozzle
- Filter-equipped intake end protects the motor from damage due to alien matters

**Specifications**

| Delivery volume (Power source: DC 16V) | Main material | Power | Total length | Suction tube length | Suction end outer diameter | Discharge tube length | |
|---|---------------|----------------|--------------|---------------------|----------------------------|-----------------------|---------|
| Motor oil : 5.3LPM (20°C, 5W30) | Water : 17LPM | PP, PE, Acetal | DC16V | 678~833mm | 420~575mm | 38mm | 1,800mm |

HEAVY DUTY ELECTRIC PUMP**DEP-1403S** Electric Drum Pump (Heavy Duty)

A.C. 12~20V D.C. 19LPM LED

Features & Applications

- Mechanism : Centrifugal motor
- Applicable liquids : Diesel, DEF(AdBlue), non-potable water, kerosene, antifreeze, windshield washer fluid, agricultural chemicals
- Handy nozzle holder built in
- Two types of nozzle - Plastic spout : 24.7mm
- Stainless steel spout : 18mm
- Comes with 2" NPS bung adapter
- Optional parts : 2" NPS to Buttress adapter / 2" NPS to Mauser adapter
- Filter-equipped intake end protects the motor from damage due to alien matters

**Specifications**

| Delivery volume (Power source : DC 12V) | Main material | Power | Total length | Suction tube length | Suction end outer diameter | Discharge tube length | Head outer diameter | Net weight/pc |
|--|------------------|------------|--------------|---------------------|----------------------------|-----------------------|---------------------|---------------|
| Water : 19LPM | PP, PE, POM, NBR | DC 12V~20V | 1,110mm | 850~865mm | 55mm | 2,000mm | 110mm | 2,000g |

DEP-1403T Electric Drum Pump (Telescopic Intake)

A.C. 12~20V D.C. 19LPM LED

Features & Applications

- Mechanism : Centrifugal motor
- Applicable liquids : Diesel, DEF(AdBlue), non-potable water, kerosene, antifreeze, windshield washer fluid, agricultural chemicals
- Handy nozzle holder built in
- Two types of nozzle - Plastic spout : 24.7mm
- Stainless steel spout : 18mm
- Comes with 2" NPS bung adapter
- Optional parts : 2" NPS to Buttress adapter / 2" NPS to Mauser adapter
- Filter-equipped intake end protects the motor from damage due to alien matters

**Specifications**

| Delivery volume (Power source : DC 12V) | Main material | Power | Total length | Suction tube length | Suction end outer diameter | Discharge tube length | Head outer diameter | Net weight/pc |
|--|------------------|------------|-----------------|---------------------|----------------------------|-----------------------|---------------------|---------------|
| Water : 19LPM | PP, PE, POM, NBR | DC 12V~20V | 1,110 ~ 1,500mm | 850 ~ 1,245mm | 55mm | 2,000mm | 110mm | 2,000g |

DEP-1403-20V Electric Pump (Heavy Duty / High Speed)

A.C. 20V D.C. 27LPM LED

Features & Applications

- Mechanism : Centrifugal motor
- Applicable liquids : Motor oil(ex.5W30), hydraulic oil(ex.AW46), lubricants, diesel, DEF(AdBlue), non-potable water, kerosene, antifreeze, windshield washer fluid, agricultural chemicals
- Handy nozzle holder built in
- Two types of nozzle - Plastic spout : 24.7mm
- Stainless steel spout : 18mm
- Comes with 2" NPS bung adapter
- Optional parts : 2" NPS to Buttress adapter / 2" NPS to Mauser adapter
- Filter-equipped intake end protects the motor from damage due to alien matters

**Specifications**

| Delivery volume (Power source: DC 20V) | Main material | Power | Total length | Suction tube length | Suction end outer diameter | Discharge tube length | Head outer diameter | Net weight/pc |
|--|------------------|--------|--------------|---------------------|----------------------------|-----------------------|---------------------|---------------|
| Motor oil:16LPM Water : (20°C, 5W30) 27LPM | PP, PE, POM, NBR | DC 20V | 1,110mm | 850mm ~ 865mm | 55mm | 2,000mm | 110mm | 3,000g |

DEP-1403RB Rechargeable Battery Drum Pump

Li-ION A.C. 20V D.C. 27LPM LED

Features & Applications

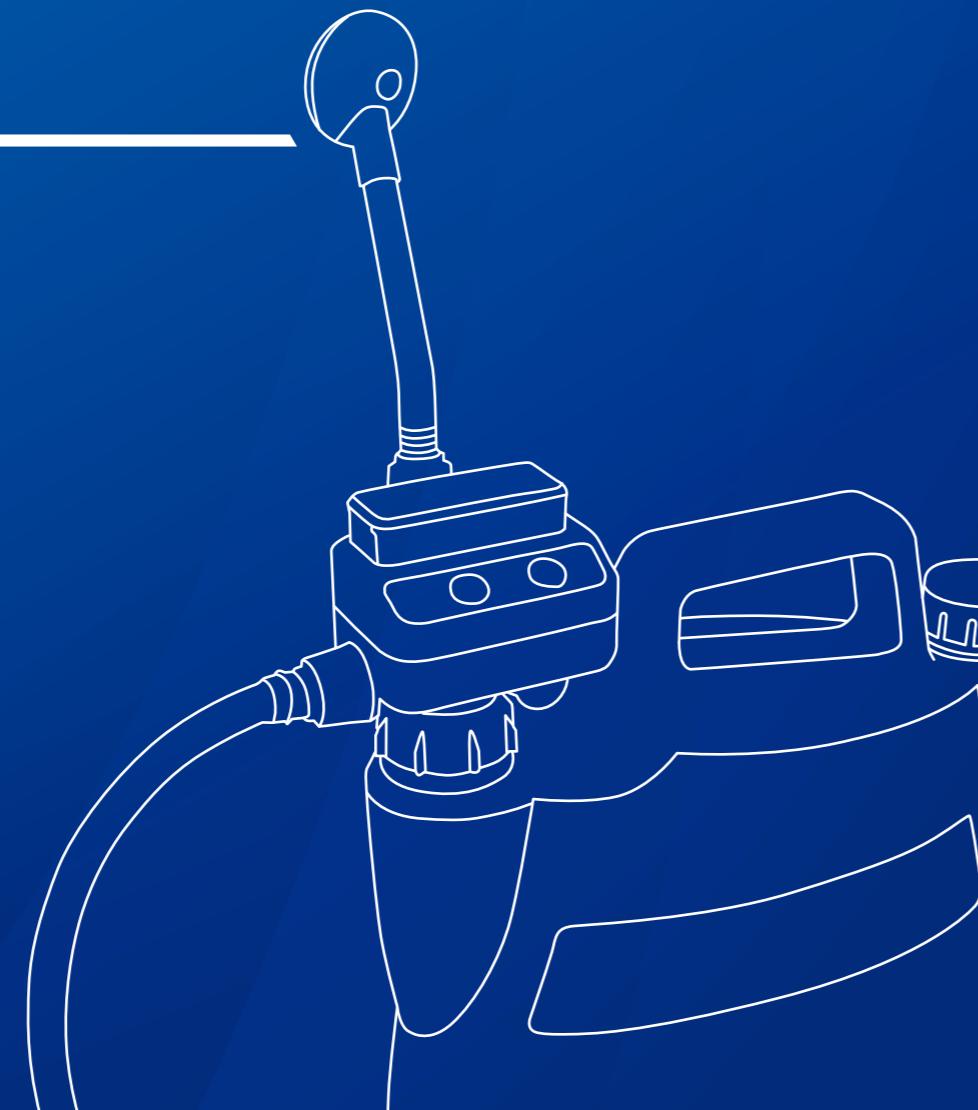
- Mechanism : Centrifugal motor
- Applicable liquids : Motor oil(ex.5W30), hydraulic oil(ex.AW46), lubricants, diesel, DEF(AdBlue), non-potable water, kerosene, antifreeze, windshield washer fluid, agricultural chemicals
- Handy nozzle holder built in
- Two types of nozzle - Plastic spout : 24.7mm
- Stainless steel spout : 18mm
- Comes with 2" NPS bung adapter
- Optional parts : 2" NPS to Buttress adapter / 2" NPS to Mauser adapter
- Filter-equipped intake end protects the motor from damage due to alien matters

**Specifications**

| Delivery volume (14.8V Li-ion battery) | Main material | Power | Total length | Suction tube length | Suction end outer diameter | Discharge tube length | Head outer diameter | Net weight/pc |
|---|------------------|-----------------------------|--------------|---------------------|----------------------------|-----------------------|---------------------|---------------|
| Water : 22LPM | PP, PE, POM, NBR | Rechargeable li-ion battery | 1,110mm | 850mm ~ 865mm | 55mm | 2,000mm | 110mm | 2,900g |

OUTDOOR PUMP

DEW-2203
DEW-2203RB
LP-2401
DP-55G



OUTDOOR PUMP

DEW-2203 Outdoor Water Pump

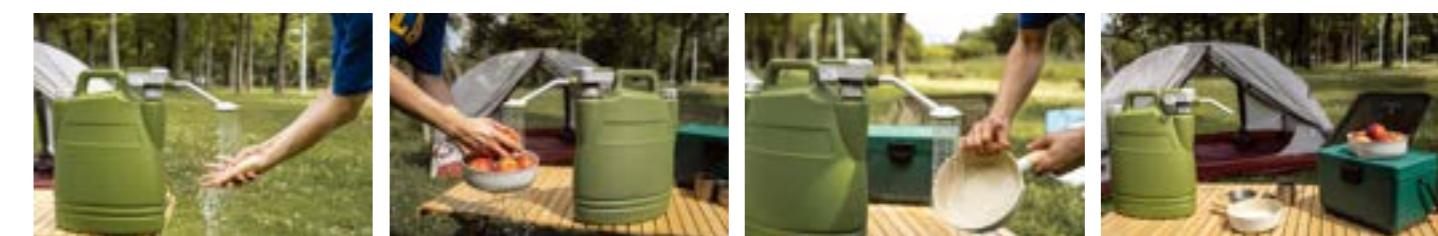
Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Non-potable water
- Membrane switch is rainproof and easy to operate
- Nozzle head turns 360° for various applications
- Clip Holder : Rotates for various storage positions
- Slim tank can be stored easily and can be used as separate water storage tank without pump
- Soft and flexible hose is easy to use and long hose enables wide range watering
- Watering, outdoor washing



Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction end outer diameter | Discharge hose length | Net weight/pc |
|-----------------|----------------|------------------------|--------------|---------------------|----------------------------|-----------------------|---------------|
| Approx. 5LPM | PP, PE, Acetal | DC 3V (4 x AA battery) | 482mm | 400mm | 32mm | Approx. 750mm | 1,310g |



DEW-2203RB Outdoor Water Pump

Features & Applications

- Mechanism : Battery operated submersible motor
- Applicable liquids : Non-potable water
- Membrane switch is rainproof and easy to operate
- Nozzle head turns 360° for various applications
- Clip Holder : Rotates for various storage positions
- Slim tank can be stored easily and can be used as separate water storage tank without pump
- Soft and flexible hose is easy to use and long hose enables wide range watering
- Watering, outdoor washing



Specifications

| Delivery volume | Main material | Power | Total length | Suction tube length | Suction end outer diameter | Discharge hose length | Net weight/pc |
|-----------------|--------------------|--------------------------|--------------|---------------------|----------------------------|-----------------------|---------------|
| Approx. 7LPM | PP, PE, PC, Acetal | DC 3.7V (Li-ion battery) | 509mm | 400mm | 32mm | 2,150mm | 1,780g |



OUTDOOR PUMP**LP-2401** Powered Portable Tank**Features & Applications**

- Protect the pump from damage and mess
- Prevention of hose kinking with stainless steel spring application
- Safer and more convenient with trigger nozzle control the flow at the discharge end without spilling
- Spout cover eliminates fuel dripping from the spout
- Safe and convenient way to stow the nozzle after use
- Fuel tank can be conveniently refueled without removing the pump from the tank
- Easy handling and storage with strong and practical design
- Outdoor recreation
- Compatible liquids: Gasoline, diesel, kerosene, non-potable water



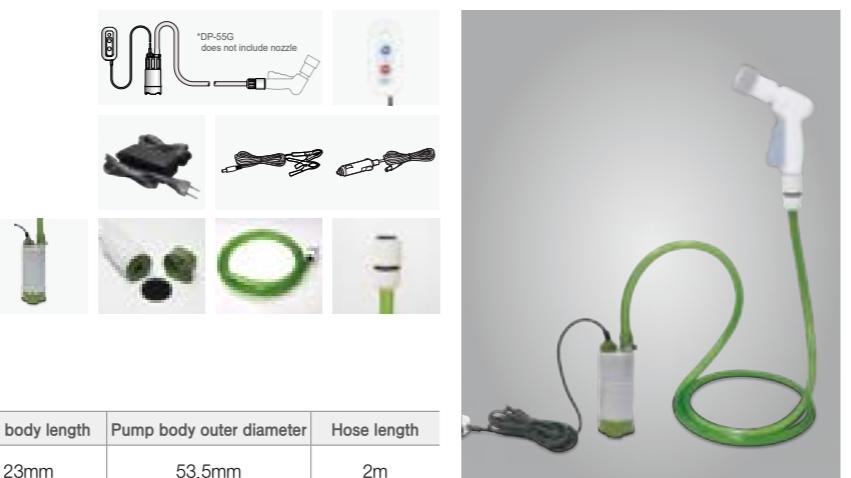
7LPM

Specifications

| Delivery volume | Power | Discharge hose length | Tank capacity |
|-----------------|------------------------|-----------------------|---------------|
| Approx. 7LPM | DC 3V (4 x AA battery) | Approx.650mm | Approx. 16L |

**DP-55G** Rain Barrel Pump**Features & Applications**

- Membrane switch : Rain proof membrane switch protects against dust and easy to use
- Storage hole : Convenient for usage and storage
- LED lamp : LED is on while pump is running
- DC motor : Powerful motor discharges liquid at high flow speed
- Filter-equipped intake end protects the pumping system from damage due to alien matters
- Connect any 5/8" garden nozzle or hose extension

**Specifications**

| Input voltage | Output voltage | Delivery volume | Pump body length | Pump body outer diameter | Hose length |
|----------------------|----------------|-------------------------------------|------------------|--------------------------|-------------|
| 100-240VAC ~ 50/60Hz | DC16V 4A | Approx. 3.3LPM (0.87GPM) at 1m head | 123mm | 53.5mm | 2m |

**ACCESSORIES****DS-01****DS-03****DSC-01****DSC-03****BUTTRESS ADAPTER****TRISURE ADAPTER****MAUSER ADAPTER****FLOW METER****DN-1403****DN-1504****DN-1706****DMH****RB-2500****RB-2109****VALVE & COUPLER**

ACCESSORIES**DS-01** Plastic Pipette

Features & Specifications

- Convenient to remove waste liquid in bottom of container
- Total length : 265mm
- Main material : PE
- Suction capacity : 50cc
- Net weight/pc : 13.5g

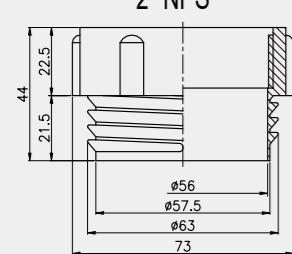
**DSC-01** Storage Case for Hand Pump (Big Type)

Features & Specifications

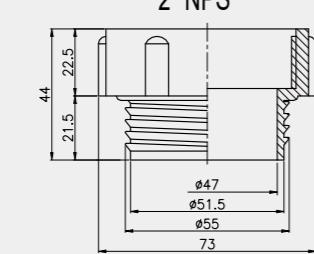
- Storage case for pump
- Main material : PE, PP
- Net weight/pc : 130g

**Buttress Adapter**

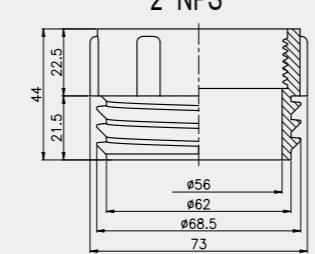
2" NPS to Buttress

**Trisure Adapter**

2" NPS to Trisure

**Mauser Adapter**

2" NPS to Mauser

**ACCESSORIES****DS-03** LED Lamp

Features & Specifications

- Convenient to use in dark places
- Applicable model : DP-03-1, DP-08EA, DP-101A
- Main materials : PP, ABS

**Flow Meter** for Water-based Fluid

Features & Specifications

- Flow rates : 5 ~ 120LPM
- Accuracy : $\pm 1\%$
- Operating pressure(Max.) : 10bar
- Operating temp. : $+5^{\circ}\text{C}$ ~ 40°C
- Net weight/pc : 214g
- Inlet connection : 1"
- BSP male thread

**Flow Meter** for Oil

Features & Specifications

- Flow rates : 1 ~ 35LPM
- Accuracy : $\pm 0.5\%$
- Operating pressure(Max.) : 50bar
- Operating temp. : $+5^{\circ}\text{C}$ ~ 40°C
- Net weight/pc : 400g
- Inlet connection : 1/2"
- BSP female thread

**DN-1403** Trigger Nozzle

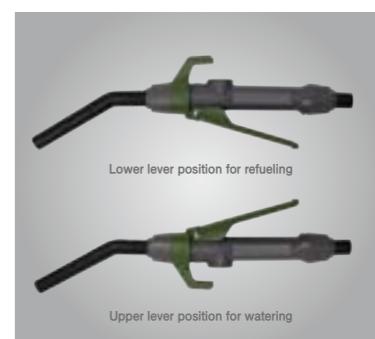
Features & Specifications

- Two types of spout
 - Plastic spout : 24.7mm
 - Stainless steel spout : 18mm
- Applicable hose inner diameter : 19mm

**DN-1504** Trigger Nozzle

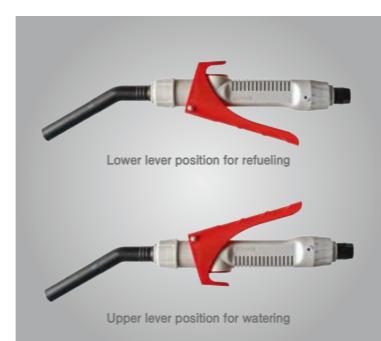
Features & Specifications

- Nozzle lever designed to operate in two different ways according to the application
- Flow adjustable
- Applicable hose inner diameter : 16mm
- Discharge spout outer diameter : 15.9mm

**DN-1706** Trigger Nozzle

Features & Specifications

- Nozzle lever designed to operate in two different ways according to the application
- Applicable hose inner diameter : 16mm
- Discharge spout outer diameter : 15.9mm

**DMH** Multi-purpose Hose

Features & Specifications

- Inner diameter: 19mm(3/4"), 15.9mm(5/8"), 12.7mm(1/2")
- Guaranteed oil, chemical, and cold weather resistance with high flexibility
- Four-layer construction ensures excellent durability and allows various applications
- ISO 22241-2 certified for DEF compatibility
- Applicable model : DEP-1403 series, DEP-1702 series, DLP-2105N, DEP-1908N, DEP-1603-12V

**RB-2500** Rechargeable Li-ion Battery

Features & Specifications

- Capacity : 14.8V \times 2.5Ah (37Wh)
- Recharge with designated charger
- Charging time: About 3 hours
- Battery level indication with LED
- Automatically idle after 30 minutes
- Applicable model : DEP-1403RB, DEP-1702RB

**RB-2109** Rechargeable Li-ion Battery

Features & Specifications

- Capacity : 3.7V \times 2.5Ah (9.25Wh)
- Recharge with USB-C cable
- Charging time: About 3 hours
- Battery level indication with LED
- Automatically idle after 30 minutes
- Applicable model : DEW-1904RB



ACCESSORIES

Fill Coupler

Features & Specifications

- Design improvements allow for flow rates up to 40 gpm
- Significant cost savings when compared to commonly used stainless steel fill heads
- 4 Cam locking mechanism
- BSPP swivel outlet can accommodate adapters from $\frac{3}{4}$ " to 2"



Dispense Coupler

Features & Specifications

- Design improvements allow for flow rates up to 23.5 gpm
- Heavy-duty handle with an audible click locking feature
- 4 Cam locking mechanism
- Integrated $\frac{3}{4}$ " x 90 degree swivel barb connection

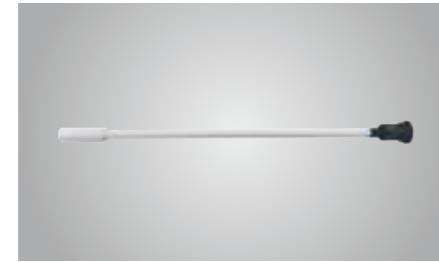


Valve (55 gallon)

**Features & Specifications**

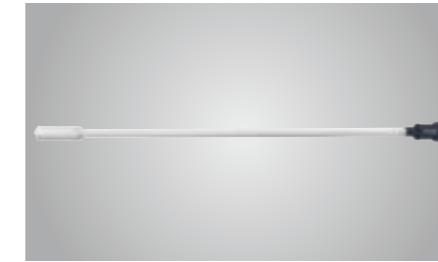
- Length : Approx. 875mm
- 4 Cam locking mechanism
- Secure and tamper evident ready
- Simple as Click, Pump, Go.

Valve (275 gallon)

**Features & Specifications**

- Length : Approx. 1035mm
- 4 Cam locking mechanism
- Secure and tamper evident ready
- Simple as Click, Pump, Go.

Valve (330 gallon)

**Features & Specifications**

- Length : Approx. 1215mm
- 4 Cam locking mechanism
- Secure and tamper evident ready
- Simple as Click, Pump, Go.

Professional Pumping Systems
DUKSHIN